

MILITARY KNOBS


(MS91528, QPL LISTED)

MATERIAL:


KNOB: Molded of polycarbonate self extinguishing thermoplastic. Matte Finish. (Method 111 of MIL-Std 202)

METAL INSERT: Aluminum, plated to withstand salt spray. (Method 101, test condition B, of MIL-Std 202)

SET SCREWS: Two socket head set-screw, type 111, style 4, of specification FF-S-103 per knob

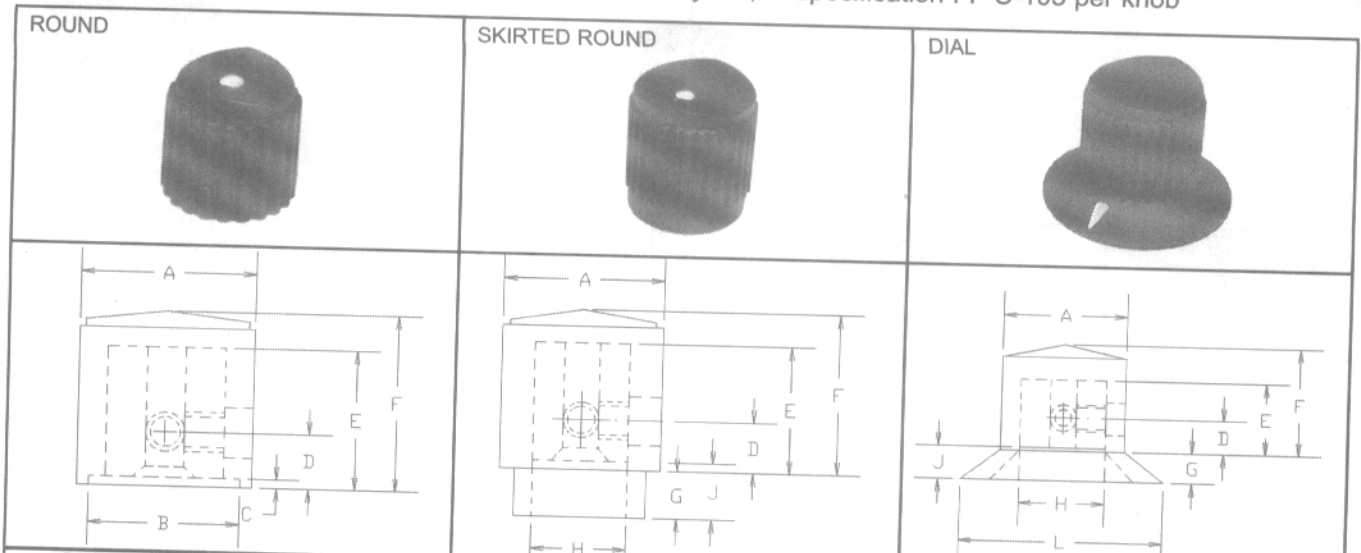

PART NUMBER		STYLE	KNOB DIA.	SHAFT DIA.	(2) SET SCREW	A +.030/-.010	B MIN.	C MIN.	D MAX.	E MIN.	F ±.030	G REF.	H MIN.	J MIN.	K ±.005	L MAX.
WITH INDICATOR	PLAIN															
790-1300	790-1324	ROUND	.500	.125	4-40	.505	.435	.026	.158	.405	.510	-	-	-	-	-
790-1303	790-1327		.700	.250	4-40	.700	.485	.026	.187	.405	.610	-	-	-	-	-
790-1304	790-1328		.900	.125	4-40	.905	.640	.114	.260	.520	.790	-	-	-	-	-
790-1305	790-1329		.900	.250	8-32	.905	.640	.114	.260	.520	.790	-	-	-	-	-
790-1306	790-1330		1.250	.250	8-32	1.250	.750	.114	.260	.455	.700	-	-	-	-	-
790-1308	790-1332	SKIRTED ROUND	.500	.125	4-40	.505	-	-	.158	.405	.510	.150	.300	.177	-	-
790-1311	790-1335		.700	.250	4-40	.700	-	-	.187	.405	.610	.170	.485	.188	-	-
790-1313	790-1337		.900	.250	8-32	.905	-	-	.260	.520	.790	.218	.640	.320	-	-
790-1314	790-1338		1.250	.250	8-32	1.250	-	-	.260	.455	.700	.150	.750	.250	-	-
790-1340		DIAL	.500	.125	4-40	.505	-	-	.158	.405	.510	.150	.300	.177	-	.900
790-1343			.700	.250	4-40	.700	-	-	.187	.405	.610	.170	.485	.188	-	1.150
790-1345			.900	.250	8-32	.905	-	-	.260	.520	.790	.218	.640	.320	-	1.525
790-1346			1.250	.250	8-32	1.250	-	-	.260	.455	.700	.150	.750	.250	-	1.837

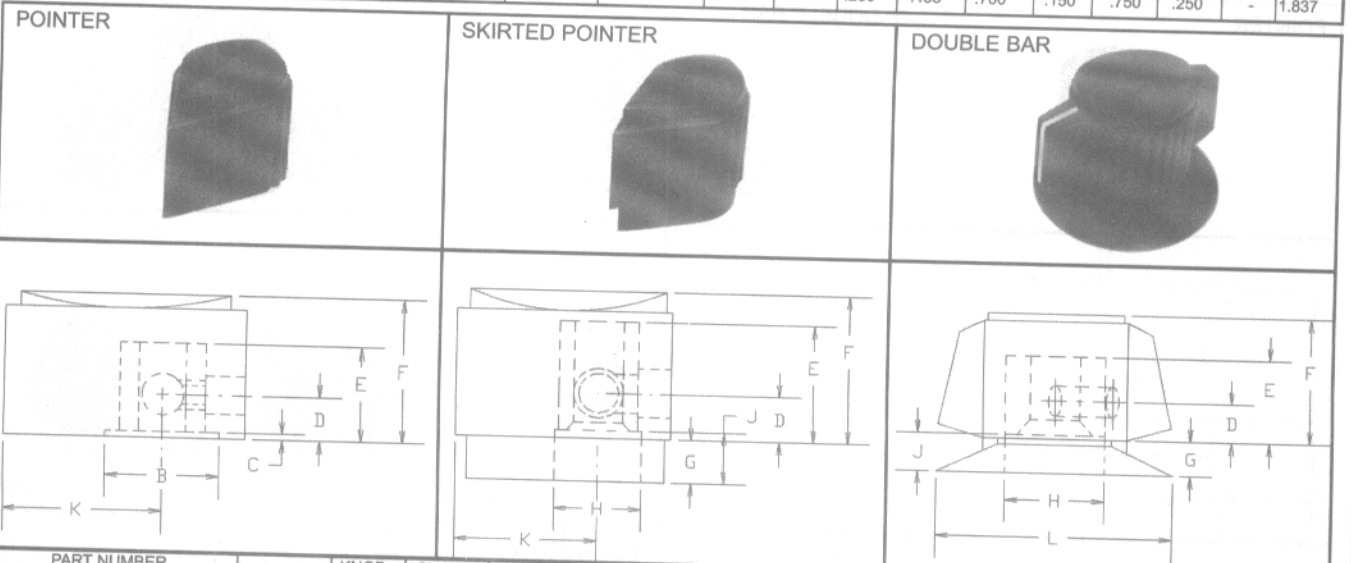

PART NUMBER		STYLE	KNOB DIA.	SHAFT DIA.	(2) SET SCREW	B MIN.	C MIN.	D MAX.	E MIN.	F ±.030	G REF.	H MIN.	J MIN.	K ±.005	L MAX.
WITH INDICATOR	PLAIN														
	790-1348	POINTER	.500	.125	4-40	.435	.026	.158	.405	.510	-	-	-	.490	-
	790-1351		.700	.250	4-40	.485	.026	.187	.405	.610	-	-	-	.680	-
	790-1353		.900	.250	8-32	.640	.114	.260	.520	.790	-	-	-	.885	-
	790-1354	SKIRTED POINTER	.500	.125	4-40	-	-	.158	.405	.510	.150	.300	.177	.490	-
	790-1357		.700	.250	4-40	-	-	.187	.405	.610	.170	.485	.188	.680	-
	790-1359	.900	.250	8-32	-	-	.260	.520	.790	.218	.640	.320	.885	-	
790-1365		DOUBLE BAR	.700	.250	4-40	-	-	.187	.405	.610	.170	.485	.188	-	1.150

