


Optical/Contact Tachometers.

back to: All Products - Electrical, Security and Test - Test Equipment - Mechanical - Tachometers

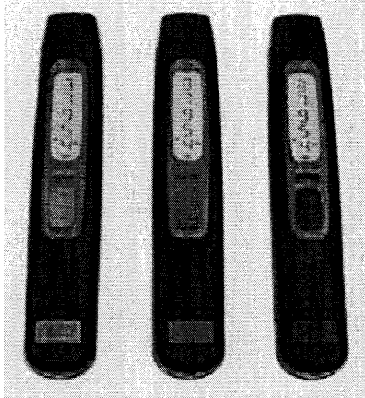

description:

IN04099: Ideal where non contact rpm and simplicity of operation is required at economic cost. Supplied with Reflective Tape, Batteries, instructions, Certificate of Conformity and is carton packed. **IN04100:** Specifically designed to suit the regular user needing both contact and non-contact measurements but yet providing practical easy to use features & high specification of rpm & meters/minute measurement. **IN04101:** Highly suitable in a wide variety of applications where in depth speed measurement data monitoring is essential, extremely versatile with measurements in minutes or seconds, with rpm and linear parameters, Maximum, Minimum speed capture, and average speed monitoring, most useful in fluctuating speed applications. Ideal for test, development, production monitoring & as a real diagnostic tool. **IN04100 & IN04101** are supplied with: Contact Adaptor, Reflective tape, Batteries, Instructions, Certificate of Conformity and custom moulded carrycase..

details:

- 5 Digit vertical display
- 0.01% ± 1 digit Accuracy
- 0.8 sec or time between pulses (whichever is slowest) Timebase
- $\pm 45^\circ$ Optical angle to reflective target
- Minilamp Light Source
- On Target Indicator and Battery Low Indication in display
- Power Source = 4 x AAA batteries

• **technical information:**

Technical Data	-	-	-
-	IN04099	IN04100	IN04101
Speed Range (rpm)	60-19999	3-99999	60-19999 or 0.05-1666 rps
Linear Speed Range	-	Meters/min	M/min, Yds/min, Ft/min M/sec, Yds/sec, Ft/sec
Resolution	1 rpm	Max 0.01	0.001 in Autorange
Autoranging	Single fixed	Autoranging	User selectable
Optical Range	0.5 meters	1 meter	1 meter