Alle Rechte vorbehalten/ All rights reserved

Mating face according to MIL-C-24308 / DIN 41 652 / CECC 75301-802

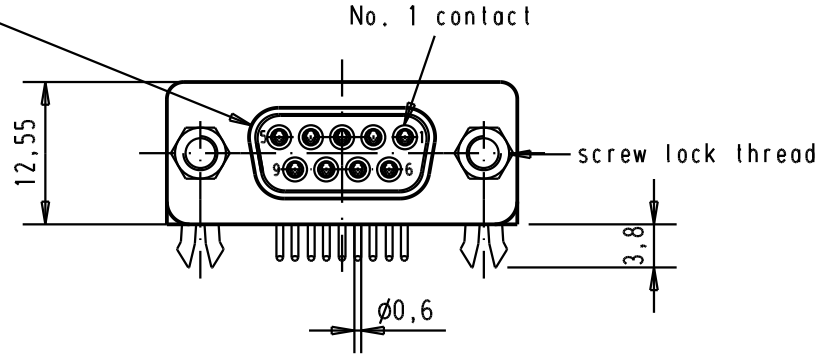

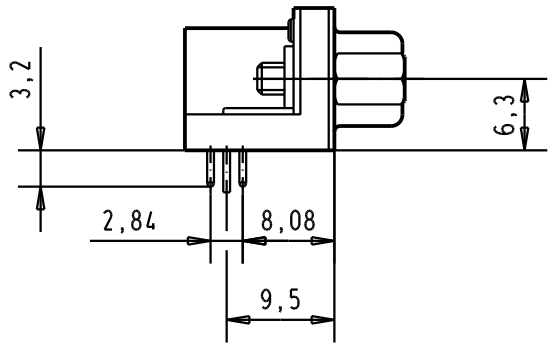

Printed board layout(1,6±0,2 thick)
View component side

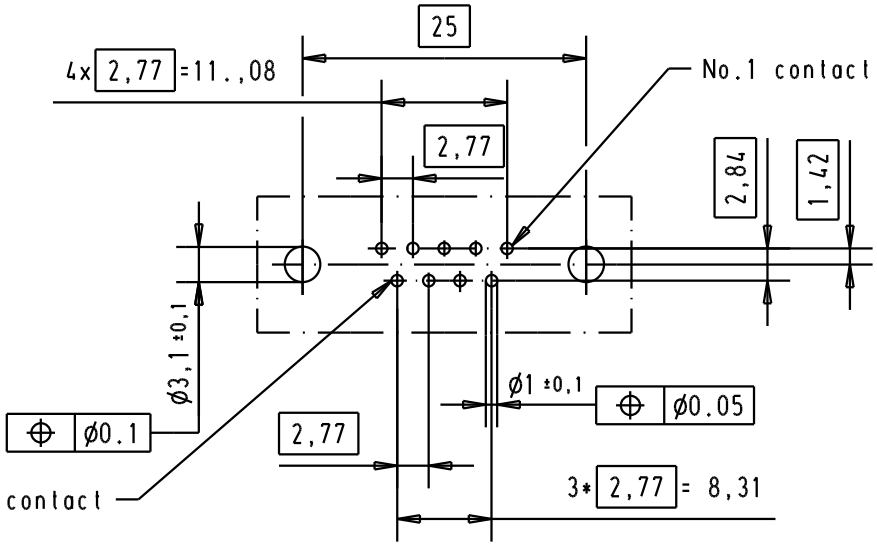

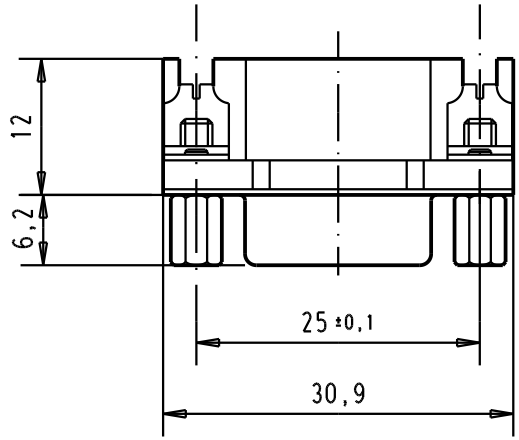

Connector insertion force on PCB = maxi 80 N

Part number	Screw lock thread	Performance level	Mod.	Dat.	Name
09 68 153 7613	4-40 UNC	3	32121	28-JUN-04	TR
09 68 153 5613	4-40 UNC	0,76 µm Au	29751	28-FEB-01	CV

	Dat.	Name
Detail.	28-FEB-02	CV
Insp.		
Stand.		

All Dim. in mm
Orig. Size DIN A 4

D-Sub female connector,
US Footprint, 9 poles
with solder pins,screw lock
and grounding board lock

Maßstab/ 1,5:1

HARTING EURL
F-95972 Paris

TB 09 68 153 X61X

Sub.

Blatt/ 2