

# W 9-2: A Versatile, Complete and Compact Series



Depending on the job, the most suitable sensor can be selected from the W 9-2 series.

Overview of the sensors:  
 WT 9-2, with adjustable background suppression, max. scanning distance 250 mm,  
 WT 9-2, energetic, max. scanning distance 450 mm,  
 WT 9-2, V model, max. scanning distance 20 mm,  
 WL 9-2, basic model, max. scanning range 4 m,  
 WL 9-2, Teach-In model, max. scanning range 4 m,  
 WL 9-2, focus, max. scanning range 0.4 m.

**T**he W 9-2 series is as versatile as the tasks in automation. The standardized, compact housing model makes it possible to use high-performance sensors that operate reliably even in cramped mounting conditions. All W 9-2 models have red light transmitters as a standard feature. The sensor can be aligned on the object quickly and precisely using the visible light spot. In the models with Teach-In function, the sensor optimizes its sensitivity automatically to the given operating conditions at the push of a button.

There are multifaceted applications in the targeted main branches thanks to this great variety of products:

- Storage and handling engineering
- Packaging industry
- Electronics industry
- Elevator construction.


	<b>Photoelectric proximity switches HGA</b>
	<b>Photoelectric proximity switches ener.</b>
	<b>Photoelectric proximity switches V</b>
	<b>Photoelectric reflex switches</b>



**Scanning distance**  
 30 ... 250 mm  
**Photoelectric proximity switch**

- LED light source, visible red light
- Background suppression
- Scanning distance adjustable
- Switching frequency 1500/s
- Outputs short-circuit protected


### Dimension illustration

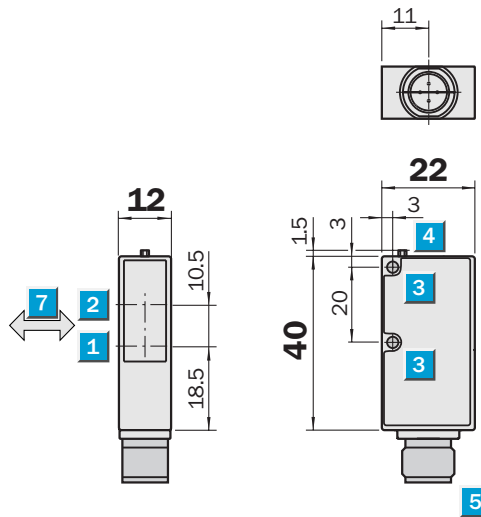

### Setting options


WT 9-2P130	WT 9-2P330
WT 9-2P430	WT 9-2P630
WT 9-2N130	
WT 9-2N430	

- 1 Axis of the sender optics
- 2 Axis of the receiver optics
- 3 Mounting hole  $\varnothing$  3.2 mm
- 4 LED signal strength indicator
- 5 Plug M 12 or M 8, 4 pin, 2 m connection cable or 120 mm cable with plug M 12, 4 pin
- 6 Scanning distance adjuster
- 7 Standard direction of the material to be scanned

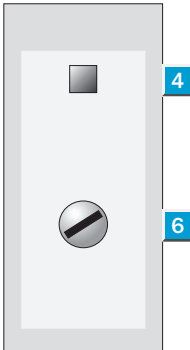


### Connection type


WT 9-2P430	WT 9-2P330	WT 9-2P130	WT 9-2P630
WT 9-2N430		WT 9-2N130	

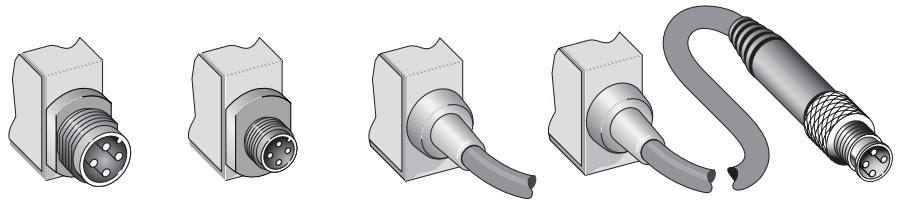


#### 4 pin, M 12




#### 4 pin, M 8



#### 4 x 0,14 mm<sup>2</sup>



#### 4 pin, M 12 with 120 mm cable



### Accessories

- Mounting bracket
- Cable receptacles
- Adapter plate




Technical data		WT 9-2	P130	P430	N130	N430	P330	P630				
<b>Scanning distance adjustable</b> <sup>4)</sup>	30 ... 250 mm											
Scanning range	5 ... 250 mm											
<b>Supply voltage</b> $V_S$ <sup>2)</sup>	DC 10 ... 30 V											
Ripple <sup>3)</sup>	$\leq 5 V_{PP}$											
Current consumption <sup>4)</sup>	$\leq 40$ mA											
<b>Light source</b>	LED, visible red light <sup>5)</sup>											
Light spot diameter	15 x 15 mm at a distance of 200 mm											
<b>Switching outputs Q and <math>\bar{Q}</math></b>	PNP											
	NPN											
Signal voltage HIGH	$V_S - 2.9$ V											
	$V_S$											
Signal voltage LOW <sup>6)</sup>	Approx. 0 V											
	$\leq 1.5$ V											
<b>Output current</b> $I_A$ max.	$\leq 100$ mA											
<b>Response time</b> <sup>7)</sup>	$\leq 333$ $\mu$ s											
<b>Switching frequency</b> max. <sup>8)</sup>	1500/s											
<b>Connection technology</b>	Connection cable, 2 m											
	Cable, 120 mm, with plug M 12, 4 pin											
	Plug M 12, 4 pin											
	Plug M 8, 4 pin											
<b>VDE protection class M 12</b> <sup>9)</sup>	<input type="checkbox"/>											
<b>VDE protection class M 8</b> <sup>9)</sup>	III											
<b>Protection type</b>	IP 67											
<b>Protection circuits</b> <sup>10)</sup>	A, B, C											
<b>Ambient temperature</b> <sup>11)</sup>	Operation $-40 \dots +60$ °C											
	Storage $-40 \dots +75$ °C											
<b>Weight</b>												
with connection cable 2 m/120 mm	Approx. 80 g											
with equipment plug M 12/M 8, 4 pin	Approx. 20 g											

<sup>4)</sup> Object with 90% reflectance (referred to standard white DIN 5033)  
<sup>2)</sup> Limit values  
<sup>3)</sup> Must be within  $V_S$  tolerances  
<sup>4)</sup> Without load


<sup>5)</sup> Average service life at room temperature 100,000 h  
<sup>6)</sup> At  $T_U = +25$  °C and 100 mA output current  
<sup>7)</sup> With resistive load  
<sup>8)</sup> With light/dark ratio 1:1

<sup>9)</sup> Withstand voltage 50 V  
<sup>10)</sup> A = supply connections reverse polarity protected  
 B = outputs short-circuit protected  
 C = interference suppression  
<sup>11)</sup> Do not distort cable below 0 °C

**Scanning distance**

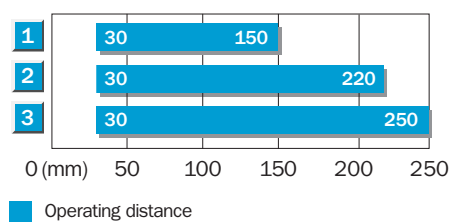


- 1** Scanning range on black <sup>1)</sup>, white background, Black = 6% reflectance
- 2** Scanning range on gray, white background, Gray = 18% reflectance
- 3** Scanning range on white, white background, White = 90% reflectance

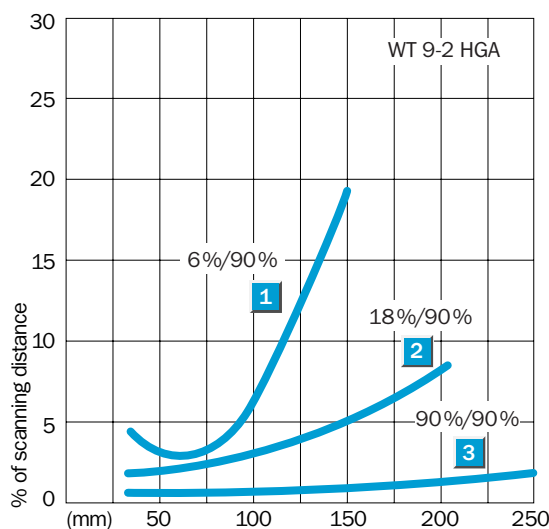


**Ordering information**

Type	Order no.
WT 9-2P130	1 018 293
WT 9-2P430	1 018 295
WT 9-2N130	1 018 294
WT 9-2N430	1 018 296
WT 9-2P330	1 019 026
WT 9-2P630	1 019 272


**Scanning distance**  
**18 ... 450 mm**  
 Photoelectric proximity switch

- Red-light emitter LED as alignment aid
- Scanning distance adjustable
- Switching frequency 800/s
- Outputs short-circuit protected
- Teach-In


**Dimension illustration**

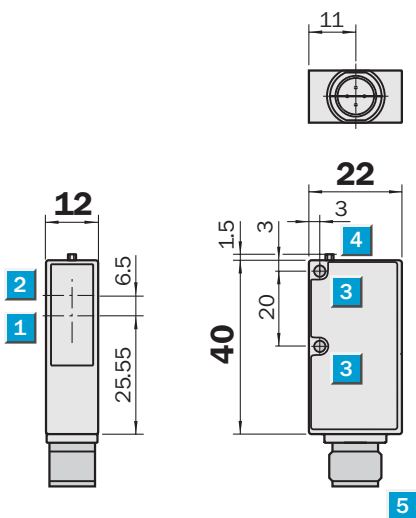

**Setting options**


WT 9-2P151	WT 9-2P351
WT 9-2P451	WT 9-2P651
WT 9-2N151	
WT 9-2N451	

- 1 Axis of the receiver optics
- 2 Axis of the sender optics
- 3 Mounting hole  $\varnothing$  3.2 mm
- 4 LED signal strength indicator
- 5 Plug M 12 or M 8, 4 pin, 2 m connection cable or 120 mm cable with plug M 12, 4 pin
- 6 Scanning distance adjuster, teachable

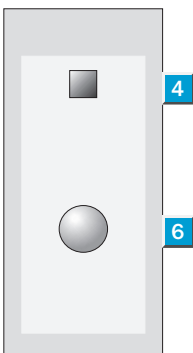

**Connection type**


WT 9-2P451	WT 9-2P351	WT 9-2P151	WT 9-2P651
WT 9-2N451		WT 9-2N151	

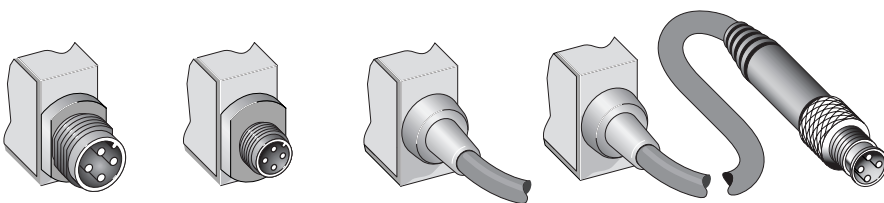

**Accessories**

Mounting bracket
Cable receptacles
Adapter plate

4 pin, M 12	4 pin, M 8	4 x 0,14 mm <sup>2</sup>	4 pin, M 12 with 120 mm cable
-------------	------------	--------------------------	-------------------------------

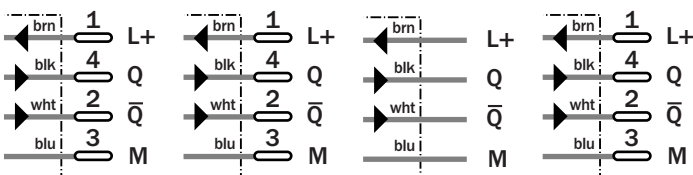

Technical data		WT 9-2	P151	P451	N151	N451	P351	P651				
<b>Scanning distance adjustable</b> <sup>1)</sup>	10 ... 450 mm											
<b>Supply voltage</b> $V_s$ <sup>2)</sup>	DC 10 ... 30 V											
Ripple <sup>3)</sup>	$\leq 5 V_{pp}$											
Current consumption <sup>4)</sup>	$\leq 30$ mA											
<b>Light source</b>	LED, visible red light <sup>5)</sup>											
Light spot diameter	80 x 80 mm at a distance of 500 mm											
<b>Switching outputs Q and <math>\bar{Q}</math></b>	PNP											
	NPN											
Signal voltage HIGH	$V_s - 2.9$ V											
	$V_s$											
Signal voltage LOW <sup>6)</sup>	Approx. 0 V											
	$\leq 2.9$ V											
<b>Output current</b> $I_A$ max.	$\leq 100$ mA											
<b>Response time</b> <sup>7)</sup>	$\leq 625$ $\mu$ s											
<b>Switching frequency max.</b> <sup>8)</sup>	800/s											
<b>Connection technology</b>	Connection cable, 2 m											
	Cable, 120 mm, with plug M 12, 4 pin											
	Plug M 12, 4 pin											
	Plug M 8, 4 pin											
<b>VDE protection class M 12</b> <sup>9)</sup>	<input type="checkbox"/>											
<b>VDE protection class M 8</b> <sup>9)</sup>	III											
<b>Protection type</b>	IP 67											
<b>Protection circuits</b> <sup>10)</sup>	A, B, C											
<b>Ambient temperature</b> <sup>11)</sup>	Operation $-40 \dots +60$ °C											
	Storage $-40 \dots +75$ °C											
<b>Weight</b>												
with connection cable 2 m/120 mm	Approx. 80 g											
with equipment plug M 12/M 8, 4 pin	Approx. 20 g											

1) Object with 90% reflectance (referred to standard white DIN 5033)  
 2) Limit values  
 3) Must be within  $V_s$  tolerances

4) Without load  
 5) Average service life at room temperature 50,000 h  
 6) At  $T_U = +25$  °C and 100 mA output current

7) With resistive load  
 8) With light/dark ratio 1:1  
 9) Withstand voltage 50 V


10) A = supply connections reverse polarity protected  
 B = outputs short-circuit protected  
 C = interference suppression  
 11) Do not distort cable below 0 °C

**Teach-In function**


- **Programming via Teach-In button.**
- **Simple programming:**  
 Position object in the beam and push the button: finished;  
 LED confirms the Teach-In procedure.
- **Teach-In values can be stored.**

- **Two operating modes:**  
**Default setting:** short Teach-In time (< 8 s);  
 for standard applications;  
 approx. double reserve via switching threshold;  
 LED lights continuously.  
**Precise setting:** long Teach-In time (> 8 s);  
 for precise applications;  
 small switching hysteresis;  
 LED blinks.

**Scanning distance**

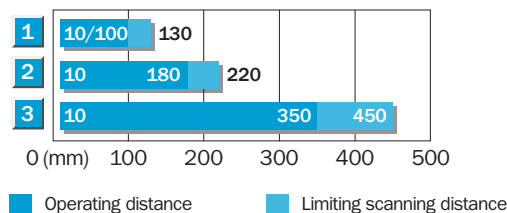

- 1 Scanning range on black, 6% reflectance
- 2 Scanning range on gray, 18% reflectance
- 3 Scanning range on white, 90% reflectance

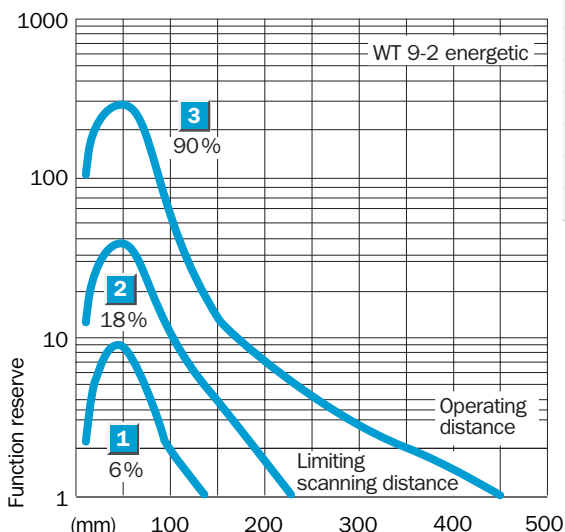


**Ordering information**

Type	Order no.
WT 9-2P151	1 018 297
WT 9-2P451	1 018 299
WT 9-2N151	1 018 298
WT 9-2N451	1 018 300
WT 9-2P351	1 019 027
WT 9-2P651	1 019 273

**Scanning distance**  
**10 ... 20 mm**  
**Photoelectric proximity switch**

- Red-light emitter LED as alignment aid
- Scanning distance adjustable
- Switching frequency 800/s
- Outputs short-circuit protected
- Teach-In


### Dimension illustration

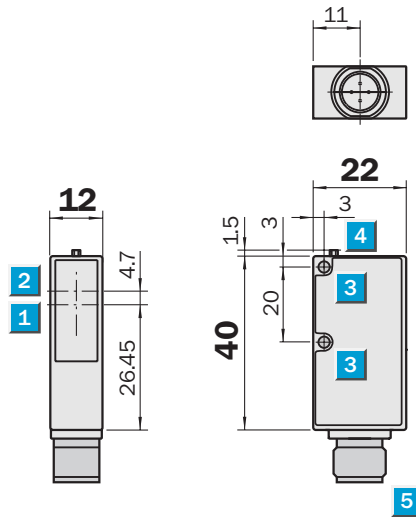

### Setting options


WT 9-2P141	WT 9-2P341
WT 9-2P441	WT 9-2P641
WT 9-2N141	
WT 9-2N441	

- 1 Axis of the receiver optics
- 2 Axis of the receiver optics
- 3 Mounting hole  $\varnothing$  3.2 mm
- 4 LED signal strength indicator
- 5 Plug M 12 or M 8, 4 pin, 2 m connection cable or 120 mm cable with plug M 12, 4 pin
- 6 Scanning distance adjuster, teachable

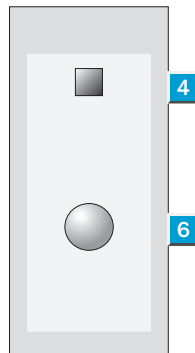


### Connection type

WT 9-2P441	WT 9-2P341	WT 9-2P141	WT 9-2P641
WT 9-2N441		WT 9-2N141	

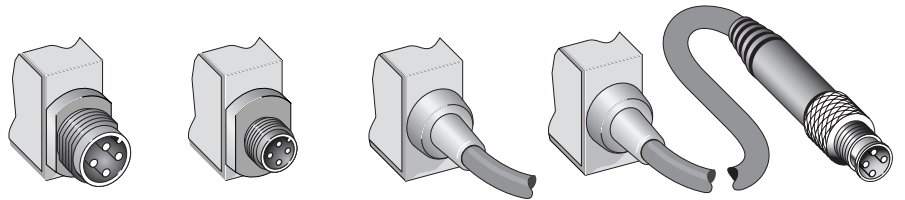

Accessories
Mounting bracket
Cable receptacles
Adapter plate

4 pin, M 12	4 pin, M 8	4 x 0,14 mm <sup>2</sup>	4 pin, M 12 with 120 mm cable
-------------	------------	--------------------------	-------------------------------

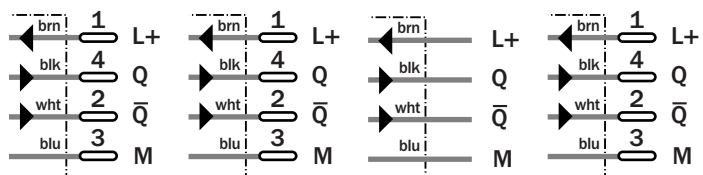

Technical data		WT 9-2	P141	P441	N141	N441	P341	P641				
<b>Scanning distance adjustable</b> <sup>1)</sup>	10 ... 20 mm											
<b>Supply voltage</b> $V_S$ <sup>2)</sup>	DC 10 ... 30 V											
Ripple <sup>3)</sup>	$\leq 5 V_{pp}$											
Current consumption <sup>4)</sup>	$\leq 30$ mA											
<b>Light source</b>	LED, visible red light <sup>5)</sup>											
Light spot diameter	3 mm at a distance of 20 mm											
<b>Switching outputs Q and <math>\bar{Q}</math></b>	PNP											
	NPN											
Signal voltage HIGH	$V_S - 2.9$ V											
	$V_S$											
Signal voltage LOW <sup>6)</sup>	Approx. 0 V											
	$\leq 2.9$ V											
<b>Output current</b> $I_A$ max.	$\leq 100$ mA											
<b>Response time</b> <sup>7)</sup>	$\leq 625$ $\mu$ s											
<b>Switching frequency max.</b> <sup>8)</sup>	800/s											
<b>Connection technology</b>	Connection cable, 2 m											
	Cable, 120 mm, with plug M 12, 4 pin											
	Plug M 12, 4 pin											
	Plug M 8, 4 pin											
<b>VDE protection class M 12</b> <sup>9)</sup>	<input type="checkbox"/>											
<b>VDE protection class M 8</b> <sup>9)</sup>	III											
<b>Protection type</b>	IP 67											
<b>Protection circuits</b> <sup>10)</sup>	A, B, C											
<b>Ambient temperature</b> <sup>11)</sup>	Operation $-40 \dots +60$ °C											
	Storage $-40 \dots +75$ °C											
<b>Weight</b>												
with connection cable 2 m/120 mm	Approx. 80 g											
with equipment plug M 12/M 8, 4 pin	Approx. 20 g											

1) Object with 90% reflectance (referred to standard white DIN 5033)  
 2) Limit values  
 3) Must be within  $V_S$  tolerances  
 4) Without load

5) Average service life at room temperature 100,000 h  
 6) At  $T_U = +25$  °C and 100 mA output current  
 7) With resistive load  
 8) With light/dark ratio 1:1

9) Withstand voltage 50 V  
 10) A = supply connections reverse polarity protected  
 B = outputs short-circuit protected  
 C = interference suppression

11) Do not distort cable below 0 °C

**Teach-In function**

■ **Programming via Teach-In button.**

■ **Simple programming:**

Position object in the beam and push the button: finished;  
 LED confirms the Teach-In procedure.


■ **Teach-In values can be stored.**

■ **Two operating modes:**

**Default setting:** short Teach-In time (< 8 s); for standard applications; approx. double reserve via switching threshold; LED lights continuously.


**Precise setting:** long Teach-In time (> 8 s); for precise applications; small switching hysteresis; LED blinks.

**Scanning distance**

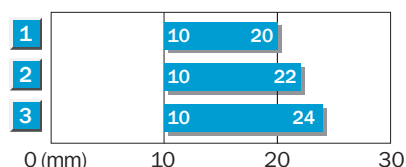

■ Scanning distance

- 1 Scanning range on black, 6% reflectance
- 2 Scanning range on gray, 18% reflectance
- 3 Scanning range on white, 90% reflectance

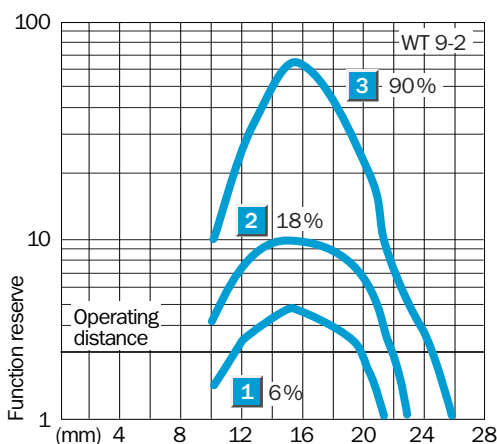

**Ordering information**

Type	Order no.
WT 9-2P141	1 018 301
WT 9-2P441	1 018 303
WT 9-2N141	1 018 302
WT 9-2N441	1 018 304
WT 9-2P341	1 019 274
WT 9-2P641	1 019 275


# WL 9-2 Photoelectric Reflex Switch, Standard

**Scanning range**  
**0 ... 4 m**

Photoelectric reflex switch

- Red-light emitter LED as alignment aid
- Switching frequency 800/s
- Outputs short-circuit protected

## Dimension illustration

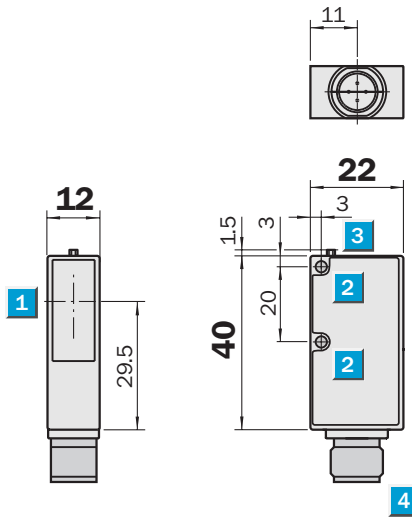

### Without setting options


WL 9-2P130	WT 9-2P330
WL 9-2P430	WT 9-2P630
WL 9-2N130	
WL 9-2N430	

- 1 Middle of optic axis
- 2 Mounting hole  $\varnothing$  3.2 mm
- 3 LED signal strength indicator
- 4 Plug M 12 or M 8, 4 pin, 2 m connection cable or 120 mm cable with plug M 12, 4 pin



### Connection type


WT 9-2P430	WT 9-2P330	WT 9-2P130	WT 9-2P630
WT 9-2N430		WT 9-2N130	

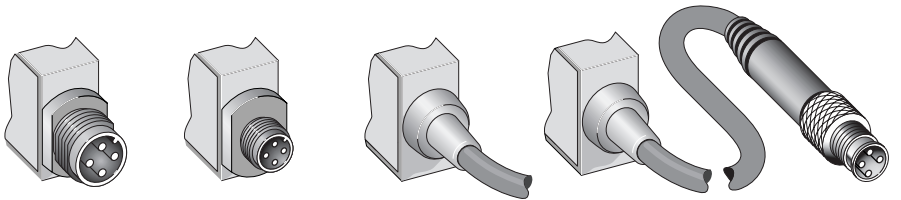


### Accessories

Reflectors
Mounting bracket
Cable receptacles
Adapter plate


#### 4 pin, M 12




#### 4 pin, M 8



#### 4 x 0,14 mm²



#### 4 pin, M 12 with 120 mm cable






Technical data		WL 9-2	P130	P430	N130	N430	P330	P630				
<b>Scanning range typ. max./on reflector</b>	4 m/PL 80 A											
<b>Supply voltage <math>V_s</math><sup>1)</sup></b>	DC 10 ... 30 V											
Ripple <sup>2)</sup>	$\leq 5 V_{pp}$											
Current consumption <sup>3)</sup>	$\leq 30 \text{ mA}$											
<b>Light source</b>	LED, visible red light <sup>4)</sup>											
Angle of dispersion	2.5°											
Light spot diameter	120 x 120 mm at a distance of 3 m											
<b>Switching outputs Q and <math>\bar{Q}</math></b>	PNP											
	NPN											
Signal voltage HIGH	$V_s - 2.9 \text{ V}$											
	$V_s$											
Signal voltage LOW <sup>5)</sup>	Approx. 0 V											
	$\leq 2.9 \text{ V}$											
<b>Output current <math>I_A</math> max.</b>	$\leq 100 \text{ mA}$											
<b>Response time<sup>6)</sup></b>	$\leq 625 \mu\text{s}$											
<b>Max. switching frequency<sup>7)</sup></b>	800/s											
<b>Connection technology</b>	Connection cable, 2 m											
	Cable, 120 mm, with plug M 12, 4 pin											
	Plug M 12, 4 pin											
	Plug M 8, 4 pin											
<b>VDE protection class M 12<sup>8)</sup></b>	<input type="checkbox"/>											
<b>VDE protection class M 8<sup>8)</sup></b>	III											
<b>Protection type</b>	IP 67											
<b>Protection circuits<sup>9)</sup></b>	A, B, C											
<b>Ambient temperature<sup>10)</sup></b>	Operation $-40 \dots +60 \text{ }^\circ\text{C}$											
	Storage $-40 \dots +75 \text{ }^\circ\text{C}$											
<b>Weight</b>												
with connection cable 2 m/120 mm	Approx. 80 g											
with equipment plug M 12/M 8, 4 pin	Approx. 20 g											

1) Limit values  
 2) Must be within  $V_s$  tolerances  
 3) Without load  
 4) Average service life at room temperature 100,000 h

5) At  $T_U = +25 \text{ }^\circ\text{C}$  and 100 mA output current  
 6) With resistive load  
 7) With light/dark ratio 1:1  
 8) Withstand voltage 50 V


9) A = supply connections reverse polarity protected  
 B = outputs short-circuit protected  
 C = interference suppression  
 10) Do not distort cable below 0 °C

**Scanning range**

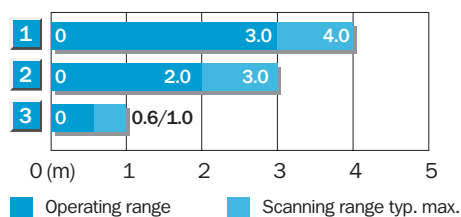

Reflector type	Operating range
1 PL 80 A	0 ... 3 m
2 PL 40 A	0 ... 2 m
3 Reflective tape Diamond Grade*	0 ... 0.6 m

\* 100 x 100 mm<sup>2</sup>

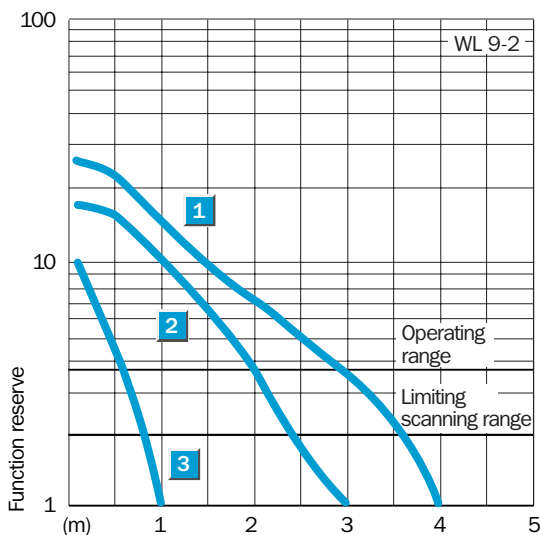

**Ordering information**


Type	Order no.
WL 9-2P130	1 018 281
WL 9-2P430	1 018 283
WL 9-2N130	1 018 282
WL 9-2N430	1 018 284
WL 9-2P330	1 019 024
WL 9-2P630	1 019 268

**Scanning range**  
**0 ... 4 m**

Photoelectric reflex switch

- Red-light emitter LED as alignment aid
- Switching frequency 800/s
- Outputs short-circuit protected
- Teach-In


### Dimension illustration

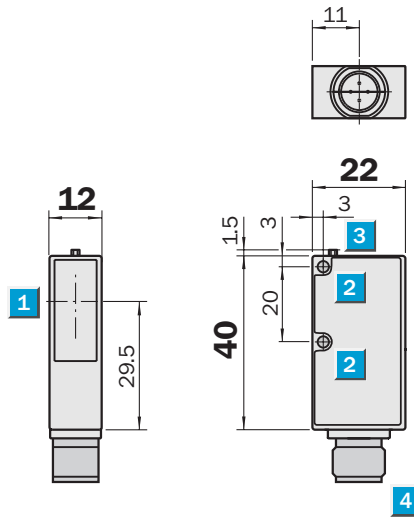

### Setting options


WL 9-2P131	WT 9-2P331
WL 9-2P431	WT 9-2P631
WL 9-2N131	
WL 9-2N431	

- 1 Middle of optic axis
- 2 Mounting hole  $\varnothing$  3.2 mm
- 3 LED signal strength indicator
- 4 Plug M 12 or M 8, 4 pin, 2 m connection cable or 120 mm cable with plug M 12, 4 pin
- 5 Sensitivity control, teachable

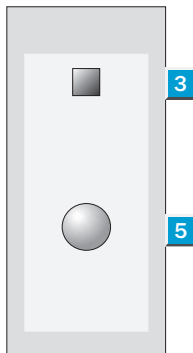

### Connection type


WT 9-2P431	WT 9-2P331	WT 9-2P131	WT 9-2P631
WT 9-2N431		WT 9-2N131	

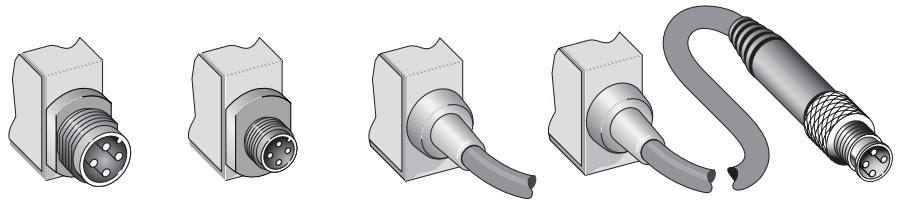


### Accessories

Reflectors
Mounting bracket
Cable receptacles
Adapter plate


### 4 pin, M 12




### 4 pin, M 8



### 4 x 0,14 mm<sup>2</sup>



### 4 pin, M 12 with 120 mm cable





Technical data		WL 9-2	P131	P431	N131	N431	P331	P631				
<b>Scanning range typ. max./on reflector</b>	4 m/PL 80 A											
<b>Supply voltage <math>V_S</math><sup>1)</sup></b>	DC 10 ... 30 V											
Ripple <sup>2)</sup>	$\leq 5 V_{pp}$											
Current consumption <sup>3)</sup>	$\leq 30$ mA											
<b>Light source</b>	LED, visible red light <sup>4)</sup>											
Angle of dispersion	2.5°											
Light spot diameter	120 x 120 mm at a distance of 3 m											
<b>Switching outputs Q and <math>\bar{Q}</math></b>	PNP											
	NPN											
Signal voltage HIGH	$V_S - 2.9$ V											
	$V_S$											
Signal voltage LOW <sup>5)</sup>	Approx. 0 V											
	$\leq 2.9$ V											
<b>Output current <math>I_A</math> max.</b>	$\leq 100$ mA											
<b>Response time<sup>6)</sup></b>	$\leq 625$ $\mu$ s											
<b>Max. switching frequency<sup>7)</sup></b>	800/s											
<b>Connection technology</b>	Connection cable, 2 m											
	Cable, 120 mm, with plug M 12, 4 pin											
	Plug M 12, 4 pin											
	Plug M 8, 4 pin											
<b>VDE protection class M 12<sup>8)</sup></b>	<input type="checkbox"/>											
<b>VDE protection class M 8<sup>8)</sup></b>	III											
<b>Protection type</b>	IP 67											
<b>Protection circuits<sup>9)</sup></b>	A, B, C											
<b>Ambient temperature<sup>10)</sup></b>	Operation $-40 \dots +60$ °C											
	Storage $-40 \dots +75$ °C											
<b>Weight</b>												
with connection cable 2 m/120 mm	Approx. 80 g											
with equipment plug M 12/M 8, 4 pin	Approx. 20 g											

1) Limit values  
 2) Must be within  $V_S$  tolerances  
 3) Without load  
 4) Average service life at room temperature 100,000 h  
 5) At  $T_U = +25$  °C and 100 mA output current  
 6) With resistive load  
 7) With light/dark ratio 1:1  
 8) Withstand voltage 50 V  
 9) A = supply connections reverse polarity protected  
 B = outputs short-circuit protected  
 C = interference suppression  
 10) Do not distort cable below 0 °C

**Teach-In function**

- **Programming via Teach-In button.**
- **Simple programming:**  
 Position reflector in the beam and push the button:  
 finished;  
 LED confirms the Teach-In procedure.
- **Teach-In values can be stored.**
- **Two operating modes:**  
**Default setting:** short Teach-In time (< 8 s);  
 for standard applications;  
 approx. double reserve via switching threshold;  
 LED lights continuously.  
**Precise setting:** long Teach-In time (> 8 s);  
 for precise applications;  
 small switching hysteresis;  
 LED blinks.

**Scanning range**

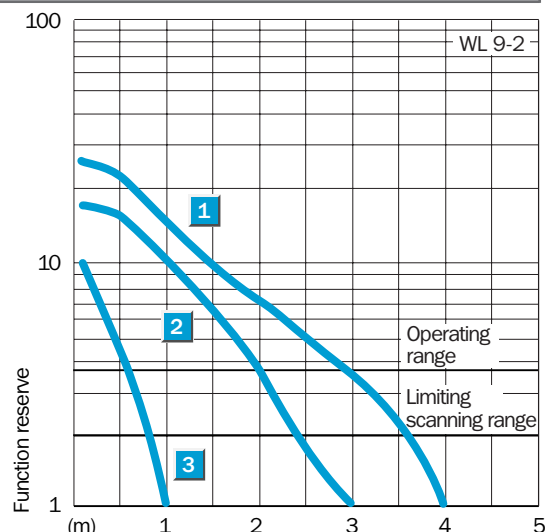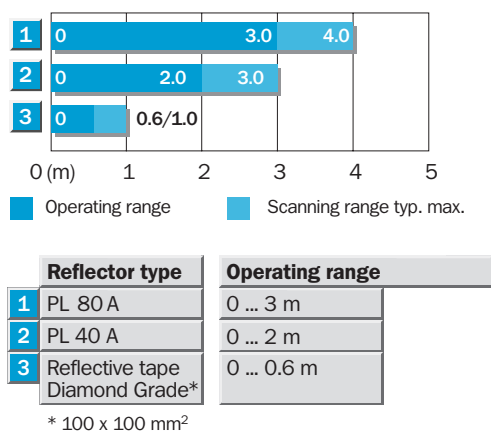

**Ordering information**


Type	Order no.
WL 9-2P131	1 018 285
WL 9-2P431	1 018 287
WL 9-2N131	1 018 286
WL 9-2N431	1 018 288
WL 9-2P331	1 019 025
WL 9-2P631	1 019 269

**Scanning range**  
**0 ... 0.4 m**

Photoelectric reflex switch

- LED light source, visible red light
- Sensitivity adjustment using the Teach-In method
- Switching frequency 800/s
- Outputs short-circuit protected


### Dimension illustration

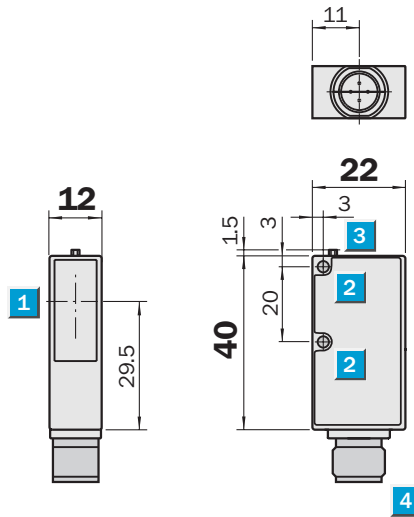

### Setting options


WL 9-2P121	WT 9-2P321
WL 9-2P421	WT 9-2P621
WL 9-2N121	
WL 9-2N421	

- 1 Middle of optic axis
- 2 Mounting hole  $\varnothing$  3.2 mm
- 3 LED signal strength indicator
- 4 Plug M 12 or M 8, 4 pin, 2 m connection cable or 120 mm cable with plug M 12, 4 pin
- 5 Sensitivity control, teachable

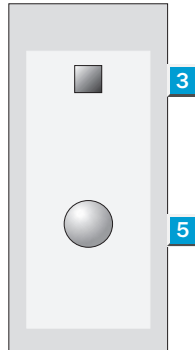

### Connection type


WT 9-2P421	WT 9-2P321	WT 9-2P121	WT 9-2P621
WT 9-2N421		WT 9-2N121	

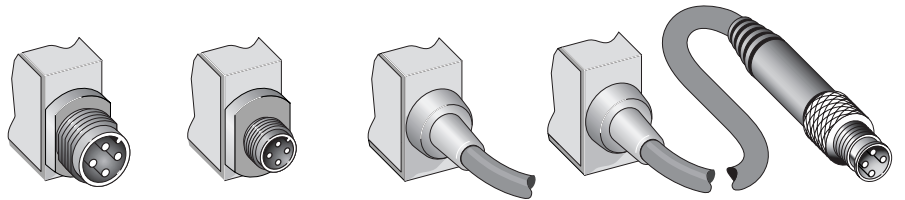


### Accessories

Reflectors
Mounting bracket
Cable receptacles
Adapter plate


### 4 pin, M 12




### 4 pin, M 8



### 4 x 0,14 mm<sup>2</sup>



### 4 pin, M 12 with 120 mm cable



Technical data		WL 9-2	P121	P421	N121	N421	P321	P621				
<b>Scanning range typ. max./on reflector</b>	0.4 m/PL 80 A											
<b>Supply voltage <math>V_s</math><sup>1)</sup></b>	DC 10 ... 30 V											
Ripple <sup>2)</sup>	$\leq 5 V_{pp}$											
Current consumption <sup>3)</sup>	$\leq 30$ mA											
<b>Light source</b>	LED, visible red light <sup>4)</sup>											
Light spot diameter	1.5 x 1.5 mm at a distance of 35 mm											
<b>Switching outputs Q and <math>\bar{Q}</math></b>	PNP											
	NPN											
Signal voltage HIGH	$V_s - 2.9$ V											
	$V_s$											
Signal voltage LOW <sup>5)</sup>	Approx. 0 V											
	$\leq 2.9$ V											
<b>Output current <math>I_A</math> max.</b>	$\leq 100$ mA											
<b>Response time<sup>6)</sup></b>	$\leq 625$ $\mu$ s											
<b>Max. switching frequency<sup>7)</sup></b>	800/s											
<b>Connection technology</b>	Connection cable, 2 m											
	Cable, 120 mm, with plug M 12, 4 pin											
	Plug M 12, 4 pin											
	Plug M 8, 4 pin											
<b>VDE protection class M 12<sup>8)</sup></b>	<input type="checkbox"/>											
<b>VDE protection class M 8<sup>8)</sup></b>	III											
<b>Protection type</b>	IP 67											
<b>Protection circuits<sup>9)</sup></b>	A, B, C											
<b>Ambient temperature<sup>10)</sup></b>	Operation $-40 \dots +60$ °C											
	Storage $-40 \dots +75$ °C											
<b>Weight</b>												
with connection cable 2 m/120 mm	Approx. 80 g											
with equipment plug M 12/M 8, 4 pin	Approx. 20 g											

1) Limit values  
 2) Must be within  $V_s$  tolerances  
 3) Without load  
 4) Average service life at room temperature 100,000 h

5) At  $T_U = +25$  °C and 100 mA output current  
 6) With resistive load  
 7) With light/dark ratio 1:1  
 8) Withstand voltage 50 V


9) A = supply connections reverse polarity protected  
 B = outputs short-circuit protected  
 C = interference suppression  
 10) Do not distort cable below 0 °C

**Teach-In function**

- **Programming via Teach-In button.**
- **Simple programming:**  
 Position reflector in the beam and push the button: finished;  
 LED confirms the Teach-In procedure.
- **Teach-In values can be stored.**


- **Two operating modes:**  
**Default setting:** short Teach-In time ( $< 8$  s);  
 for standard applications;  
 approx. double reserve via switching threshold;  
 LED lights continuously.  
**Precise setting:** long Teach-In time ( $> 8$  s);  
 for precise applications;  
 small switching hysteresis;  
 LED blinks.

**Scanning range**

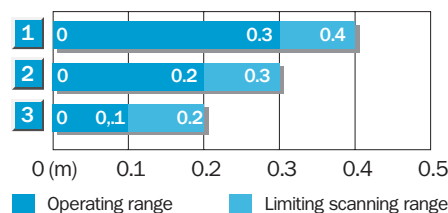

Reflector type	Operating range
1 PL 80 A	0 ... 0.5 m
2 PL 40 A	0 ... 0.3 m
3 Reflective tape Diamond Grade*	0 ... 0.25 m

\* 100 x 100 mm<sup>2</sup>

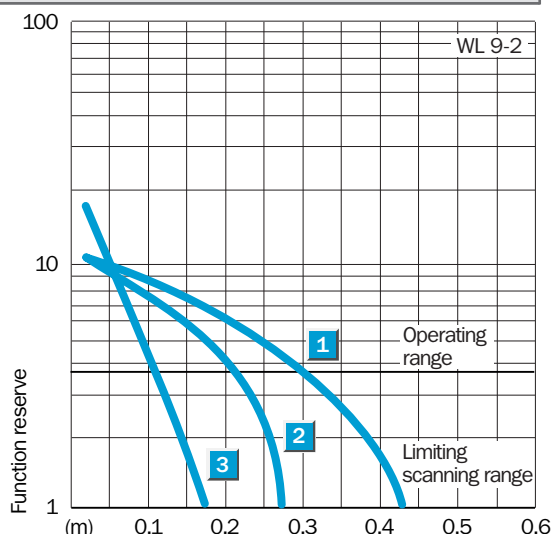

**Ordering information**


Type	Order no.
WL 9-2P121	1 018 289
WL 9-2P421	1 018 291
WL 9-2N121	1 018 290
WL 9-2N421	1 018 292
WL 9-2P321	1 019 270
WL 9-2P621	1 019 271

Dimension illustrations and ordering information

Dimension illustrations of reflectors


Reflector 20 x 40 mm

Type	Order no.
PL 20 A	1 012 719




Reflector 30 x 50 mm

Type	Order no.
PL 30 A	1 002 314

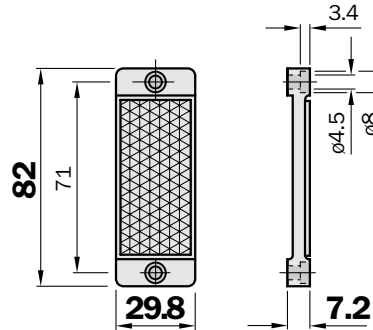


Reflector 40 x 60 mm

Type	Order no.
PL 40 A	1 012 720

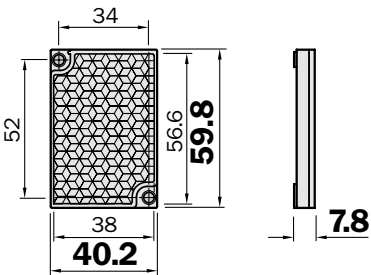

Reflector hexagonal, SW 48 mm


Type	Order no.
PL 50 A	1 000 132

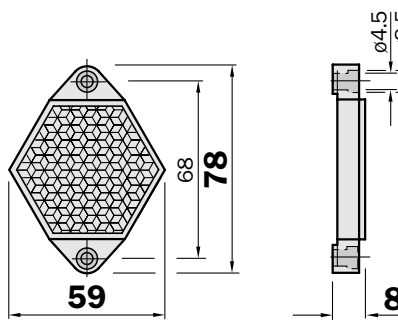

Also available as heatable model:  
 Continuous heating: PL 50HK,  
 Order no. 1 001 545  
 Regulated heating: PL 50HS,  
 Order no. 1 009 871


Reflector 80 x 80 mm

Type	Order no.
PL 80 A	1 003 865

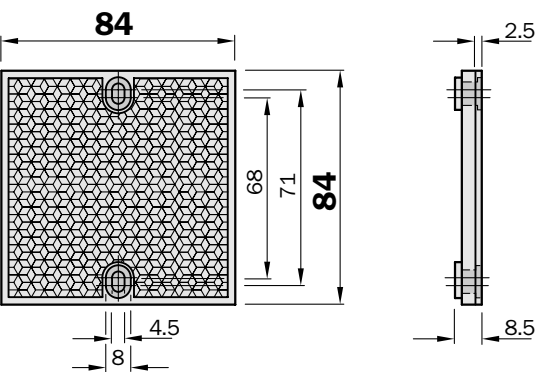


Reflector ø 83 mm, center hole mounting

Type	Order no.
C 110	5 304 549

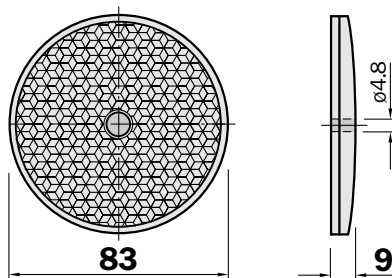

Reflective tape


Type	Order no.	
REF-DG-K	4 019 634	fabricated
REF-DG	5 304 334	sheet 749 x 914 mm



Dimension illustrations and ordering information


Dimension illustrations of cable receptacles

- Contact assignments according to EN 50044
- DC coding

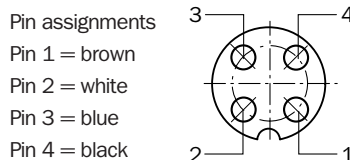

Cable receptacles M 12, 4 pin, straight


Pins	Type	Order no.	Cable lengths
4	DOS-1204-G	6 007 302	-

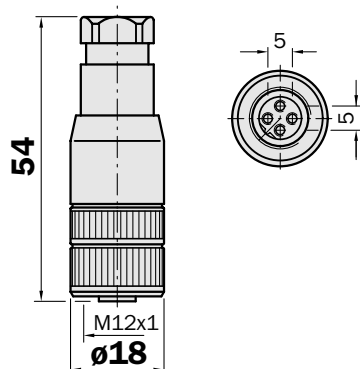

Can be self-made for cables Ø 4.5 to 6.5 mm

Cable receptacles M 12, 4 pin, angled


Pins	Type	Order no.	Cable lengths
4	DOS-1204-W	6 007 303	-

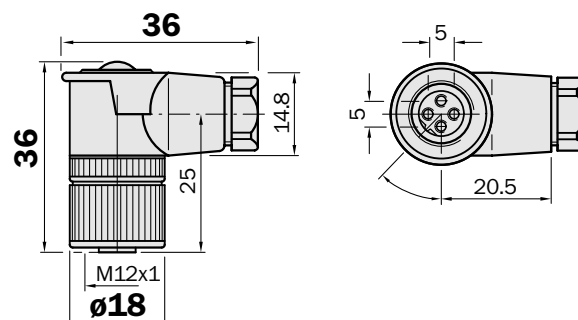

Can be self-made for cables Ø 4.5 to 6.5 mm

Cable receptacles M 12, 4 pin, straight


Pins	Type	Order no.	Cable lengths
4	DOS-1204-G02M	6 009 382	2 m
4	DOS-1204-G05M	6 009 866	5 m
4	DOS-1204-G10M	6 010 543	10 m

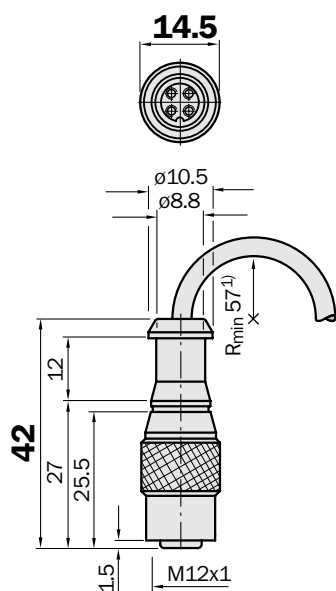

<sup>1)</sup> Minimum bending radius with dynamic use

Cable receptacles M 12, 4 pin, angled

Pins	Type	Order no.	Cable lengths
4	DOS-1204-W02M	6 009 383	2 m
4	DOS-1204-W05M	6 009 867	5 m
4	DOS-1204-W10M	6 010 541	10 m

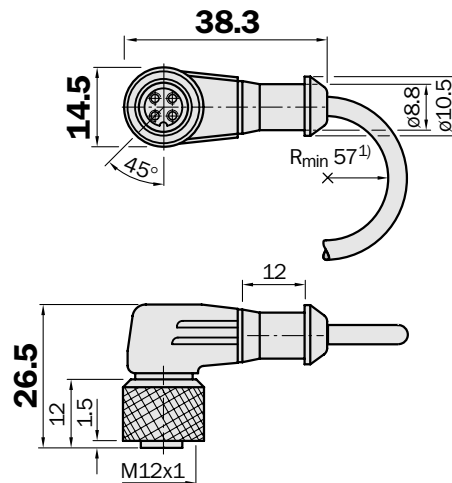


<sup>1)</sup> Minimum bending radius with dynamic use

Dimension illustrations and ordering information

SENSICK circular screwing system, M 8 plug, 4 pin, enclosure rating IP 67


M 8 cable receptacle, 4 pin, straight

Type	Order no.
DOS-0804-G	6 009 974

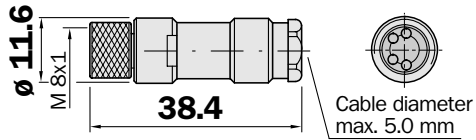

M 8 cable receptacles, 4 pin, angled


Type	Order no.
DOS-0804-W	6 009 975

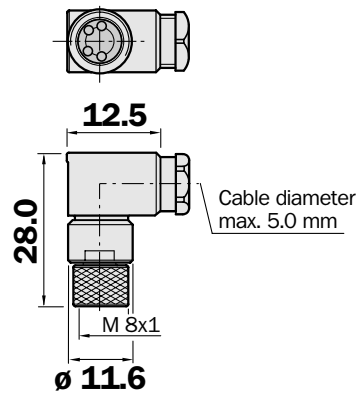

M 8 cable receptacle, 4 pin, straight

Cable diameter 5 mm, 4 x 0.25 mm<sup>2</sup>, PVC coating


Type	Order no.	Cable length
DOL-0804-G02M	6 009 870	2 m
DOL-0804-G05M	6 009 872	5 m
DOL-0804-G10M	6 010 754	10 m

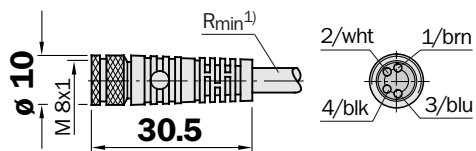

M 8 cable receptacles, 4 pin, angled

Cable diameter 5 mm, 4 x 0.25 mm<sup>2</sup>, PVC coating

Type	Order no.	Cable length
DOL-0804-W02M	6 009 871	2 m
DOL-0804-W05M	6 009 873	5 m
DOL-0804-W10M	6 010 755	10 m

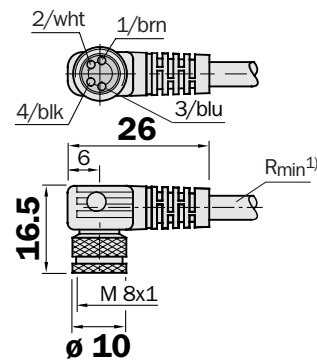

1) Minimum bending radius with dynamic use  
 $R_{min} = 20 \times \text{cable diameter}$




Dimension illustrations and ordering information

Dimension illustration adapter plate

Adapter plate


Type	Order no.
BEF-AP-W9	4 033 145

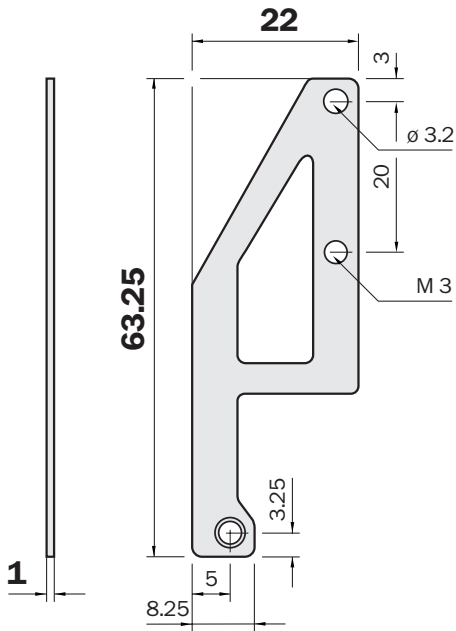

Dimension illustration mounting bracket

Mounting bracket

Type	Order no.
BEF-WN-W9-2	4 033 146

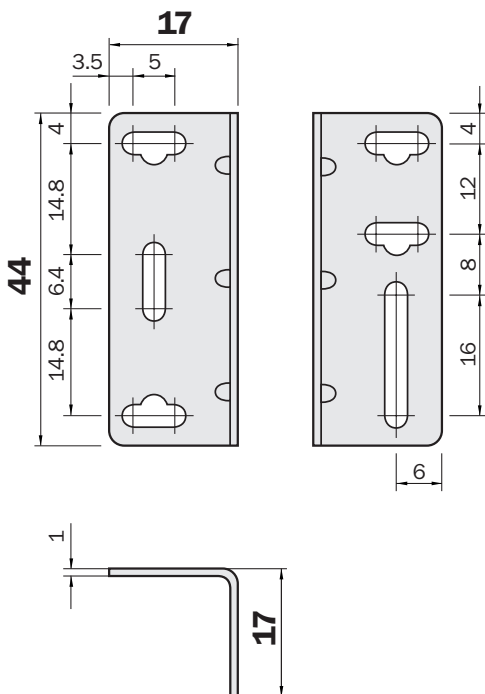

Contact:

**Australia**

Phone +61 3 94 97 41 00  
0 08 33 48 02 – toll free  
Fax +61 3 94 97 11 87

**Austria**

Phone +43 2 23 66 22 88-0  
Fax +43 2 23 66 22 88-5

**Belgium/Luxembourg**

Phone +32 24 66 55 66  
Fax +32 24 63 35 07

**Brazil**

Phone +55 11 55 61 26 83  
Fax +55 11 5 35 41 53

**China/Hong Kong**

Phone +8 52 27 63 69 66  
Fax +8 52 27 63 63 11

**Czech Republic**

Phone +42 02 57 81 05 61  
Fax +42 02 57 81 05 59

**Denmark**

Phone +45 45 82 64 00  
Fax +45 45 82 64 01

**Finland**

Phone +3 58 9-7 28 85 00  
Fax +3 58 9-72 88 50 55

**France**

Phone +33 1-64 62 35 00  
Fax +33 1-64 62 35 77

**Germany**

Phone +49 76 81 2 02-0  
Fax +49 76 81 2 02-36 09

**Great Britain**

Phone +44 17 27-83 11 21  
Fax +44 17 27-85 67 67

**Italy**

Phone +390 2-92 14 20 62  
Fax +390 2-92 14 20 67

**Japan**

Phone +813 33 58-13 41  
Fax +813 33 58-05 86

**Netherlands**

Phone +31 3 02 29 25 44  
Fax +31 3 02 29 39 94

**Norway**

Phone +47 67 56 75 00  
Fax +47 67 56 66 10

**Poland**

Phone +48 2 26 44-83 45  
Fax +48 2 26 44-83 42

**Singapore**

Phone +65 7 44 37 32  
Fax +65 8 41 77 47

**Spain**

Phone +34 9 34 80 31 00  
Fax +34 9 34 73 44 69

**Sweden**

Phone +46 8-6 80 64 50  
Fax +46 8-7 10 18 75

**Switzerland**

Phone +41 4 16 19 29 39  
Fax +41 4 16 19 29 21

**Taiwan**

Phone +88 62 23 65 62 92  
Fax +88 62 23 68 73 97

**USA**

Phone +1 9 52 9 41-67 80  
Fax +1 9 52 9 41-92 87

Representatives and agencies  
in all major industrial nations.

**SICK**

SICK AG • Industrial Sensors • Sebastian-Kneipp-Straße 1 • D-79183 Waldkirch  
Phone +49/76 81/2 02-0 • Fax +49/76 81/2 02-36 09 • www.sick.de