



Monolithic N-Channel JFET Duals

PRODUCT SUMMARY					
Part Number	$V_{GS(off)}$ (V)	$V_{(BR)GSS}$ Min (V)	g_{fs} Min (mS)	I_G Max (pA)	$ V_{GS1} - V_{GS2} $ Max (mV)
2N5196	-0.7 to -4	-50	1	-15	5
2N5197	-0.7 to -4	-50	1	-15	5
2N5198	-0.7 to -4	-50	1	-15	10
2N5199	-0.7 to -4	-50	1	-15	15

FEATURES

- Monolithic Design
- High Slew Rate
- Low Offset/Drift Voltage
- Low Gate Leakage: 5 pA
- Low Noise
- High CMRR: 100 dB

BENEFITS

- Tight Differential Match vs. Current
- Improved Op Amp Speed, Settling Time Accuracy
- Minimum Input Error/Trimming Requirement
- Insignificant Signal Loss/Error Voltage
- High System Sensitivity
- Minimum Error with Large Input Signal

APPLICATIONS


- Wideband Differential Amps
- High-Speed, Temp-Compensated, Single-Ended Input Amps
- High Speed Comparators
- Impedance Converters

DESCRIPTION

The 2N5196/5197/5198/5199 JFET duals are designed for high-performance differential amplification for a wide range of precision test instrumentation applications. This series features tightly matched specs, low gate leakage for accuracy, and wide dynamic range with I_G guaranteed at $V_{DG} = 20$ V.

The hermetically-sealed TO-71 package is available with full military processing (see Military Information and the 2N5545/5546/5547JANTX/JANTXV data sheet).

For similar products see the low-noise U/SST401 series, the high-gain 2N5911/5912, and the low-leakage U421/423 data sheets.

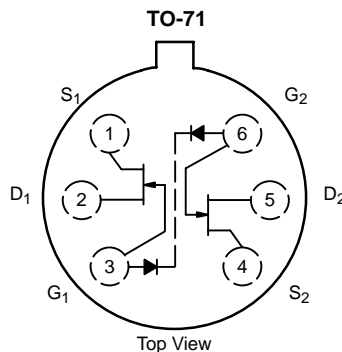

ABSOLUTE MAXIMUM RATINGS

Gate-Drain, Gate-Source Voltage -50 V
 Gate Current 50 mA
 Lead Temperature ($1/16$ " from case for 10 sec.) 300 °C
 Storage Temperature -65 to 200 °C
 Operating Junction Temperature -55 to 150 °C

Power Dissipation : Per Side^a 250 mW
 Total^b 500 mW

Notes
 a. Derate 2 mW/°C above 85 °C
 b. Derate 4 mW/°C above 85 °C



SPECIFICATIONS FOR 2N5196 AND 2N5197 (T _A = 25 °C UNLESS OTHERWISE NOTED)								
Parameter	Symbol	Test Conditions	Typ ^a	Limits				Unit
				2N5196		2N5197		
				Min	Max	Min	Max	
Static								
Gate-Source Breakdown Voltage	V _{(BR)GSS}	I _G = -1 μA, V _{DS} = 0 V	-57	-50		-50		V
Gate-Source Cutoff Voltage	V _{GS(off)}	V _{DS} = 20 V, I _D = 1 nA	-2	-0.7	-4	-0.7	-4	
Saturation Drain Current ^b	I _{DSS}	V _{DS} = 20 V, V _{GS} = 0 V	3	0.7	7	0.7	7	mA
Gate Reverse Current	I _{GSS}	V _{GS} = -30 V, V _{DS} = 0 V	-10		-25		-25	pA
		T _A = 150 °C	-20		-50		-50	nA
Gate Operating Current	I _G	V _{DG} = 20 V, I _D = 200 μA	-5		-15		-15	pA
		T _A = 125 °C	-0.8		-15		-15	nA
Gate-Source Voltage	V _{GS}	V _{DG} = 20 V, I _D = 200 μA	-1.5	-0.2	-3.8	-0.2	-3.8	V
Dynamic								
Common-Source Forward Transconductance	g _{fs}	V _{DS} = 20 V, V _{GS} = 0 V f = 1 kHz	2.5	1	4	1	4	mS
Common-Source Output Conductance	g _{os}		2		50		50	μS
Common-Source Forward Transconductance	g _{fs}	V _{DS} = 20 V, I _D = 200 μA f = 1 kHz	0.8	0.7	1.6	0.7	1.6	mS
Common-Source Output Conductance	g _{os}		1		4		4	μS
Common-Source Input Capacitance	C _{iss}	V _{DS} = 20 V, V _{GS} = 0 V f = 1 MHz	3		6		6	pF
Common-Source Reverse Transfer Capacitance	C _{rss}		1		2		2	
Equivalent Input Noise Voltage	e _n	V _{DS} = 20 V, V _{GS} = 0 V, f = 1 kHz	9		20		20	nV/ √Hz
Noise Figure	NF	V _{DS} = 20 V, V _{GS} = 0 V f = 100 Hz, R _G = 10 MΩ			0.5		0.5	dB
Matching								
Differential Gate-Source Voltage	V _{GS1} - V _{GS2}	V _{DG} = 20 V, I _D = 200 μA			5		5	mV
Gate-Source Voltage Differential Change with Temperature	$\frac{\Delta V_{GS1} - V_{GS2} }{\Delta T}$	V _{DG} = 20 V, I _D = 200 μA T _A = -55 to 125 °C			5		10	μV/°C
Saturation Drain Current Ratio	$\frac{I_{DSS1}}{I_{DSS2}}$	V _{DS} = 20 V, V _{GS} = 0 V	0.98	0.95	1	0.95	1	
Transconductance Ratio	$\frac{g_{fs1}}{g_{fs2}}$	V _{DS} = 20 V, I _D = 200 μA f = 1 kHz	0.99	0.97	1	0.97	1	
Differential Output Conductance	g _{os1} - g _{os2}		0.1		1		1	μS
Differential Gate Current	_{G1} - I _{G2}	V _{DG} = 20 V, I _D = 200 μA, T _A = 125 °C	0.1		5		5	nA
Common Mode Rejection Ratio ^c	CMRR	V _{DG} = 10 to 20 V, I _D = 200 μA	100					dB









SPECIFICATIONS FOR 2N5198 AND 2N5199 (T _A = 25 °C UNLESS OTHERWISE NOTED)									
Parameter	Symbol	Test Conditions	Typ ^a	Limits				Unit	
				2N5198		2N5199			
				Min	Max	Min	Max		
Static									
Gate-Source Breakdown Voltage	V _{(BR)GSS}	I _G = -1 μA, V _{DS} = 0 V	-57	-50		-50		V	
Gate-Source Cutoff Voltage	V _{GS(off)}	V _{DS} = 20 V, I _D = 1 nA	-2	-0.7	-4	-0.7	-4	V	
Saturation Drain Current ^b	I _{DSS}	V _{DS} = 20 V, V _{GS} = 0 V	3	0.7	7	0.7	7	mA	
Gate Reverse Current	I _{GSS}	V _{GS} = -30 V, V _{DS} = 0 V	-10		-25		-25	μA	
		T _A = 150 °C	-20		-50		-50	nA	
Gate Operating Current	I _G	V _{DG} = 20 V, I _D = 200 μA	-5		-15		-15	μA	
		T _A = 125 °C	-0.8		-15		-15	nA	
Gate-Source Voltage	V _{GS}	V _{DG} = 20 V, I _D = 200 μA	-1.5	-0.2	-3.8	-0.2	-3.8	V	
Dynamic									
Common-Source Forward Transconductance	g _{fs}	V _{DS} = 20 V, V _{GS} = 0 V, f = 1 kHz	2.5	1	4	1	4	mS	
Common-Source Output Conductance	g _{os}		2		50		50	μS	
Common-Source Forward Transconductance	g _{fs}	V _{DS} = 20 V, I _D = 200 μA f = 1 kHz	0.8	0.7	1.6	0.7	1.6	mS	
Common-Source Output Conductance	g _{os}		1		4		4	μS	
Common-Source Input Capacitance	C _{iss}	V _{DS} = 20 V, V _{GS} = 0 V, f = 1 MHz	3		6		6	pF	
Common-Source Reverse Transfer Capacitance	C _{rss}		1		2		2	pF	
Equivalent Input Noise Voltage	e _n	V _{DS} = 20 V, V _{GS} = 0 V, f = 1 kHz	9		20		20	nV/ √Hz	
Noise Figure	NF	V _{DS} = 20 V, V _{GS} = 0 V f = 100 Hz, R _G = 10 MΩ			0.5		0.5	dB	
Matching									
Differential Gate-Source Voltage	V _{GS1} - V _{GS2}	V _{DG} = 20 V, I _D = 200 μA			10		15	mV	
Gate-Source Voltage Differential Change with Temperature	$\frac{\Delta V_{GS1} - V_{GS2} }{\Delta T}$	V _{DG} = 20 V, I _D = 200 μA T _A = -55 to 125 °C			20		40	μV/°C	
Saturation Drain Current Ratio	$\frac{I_{DSS1}}{I_{DSS2}}$	V _{DS} = 20 V, V _{GS} = 0 V	0.97	0.95	1	0.95	1		
Transconductance Ratio	$\frac{g_{fs1}}{g_{fs2}}$	V _{DS} = 20 V, I _D = 200 μA f = 1 kHz	0.97	0.95	1	0.95	1		
Differential Output Conductance	g _{os1} - g _{os2}		0.2		1		1	μS	
Differential Gate Current	I _{G1} - I _{G2}	V _{DG} = 20 V, I _D = 200 μA, T _A = 125 °C	0.1		5		5	nA	
Common Mode Rejection Ratio ^c	CMRR	V _{DG} = 10 to 20 V, I _D = 200 μA	97					dB	

Notes

- a. Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.
- b. Pulse test: PW ≤ 300 μs duty cycle ≤ 3%.
- c. This parameter not registered with JEDEC.







NQP

TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

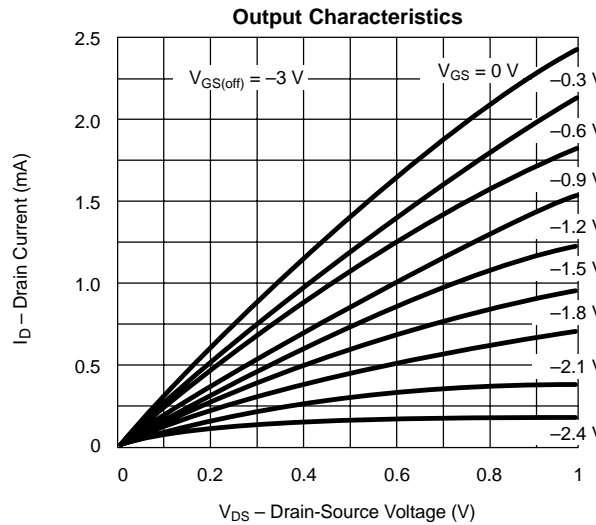
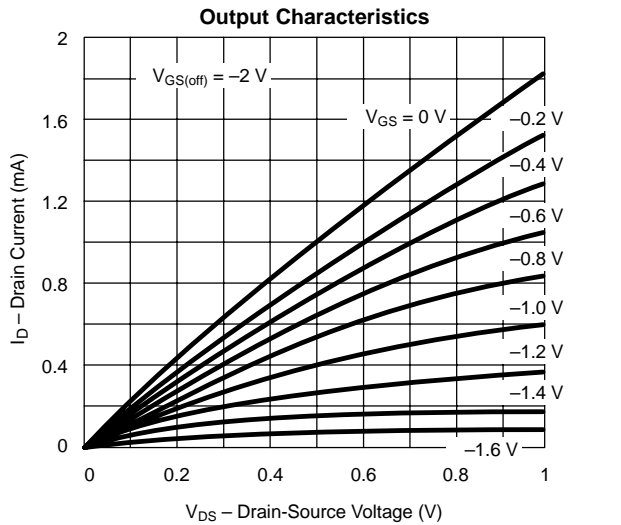
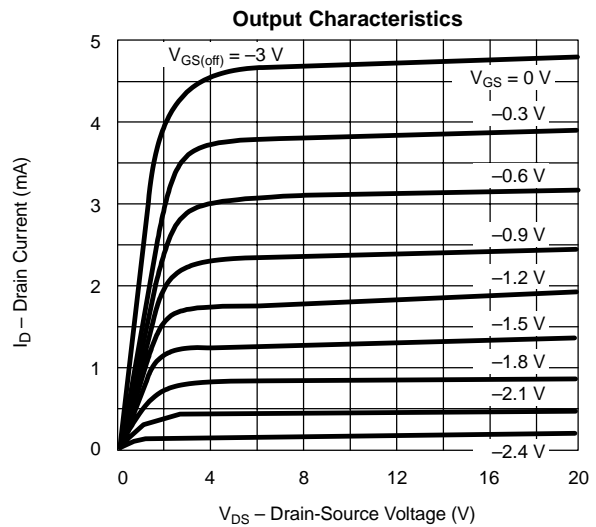
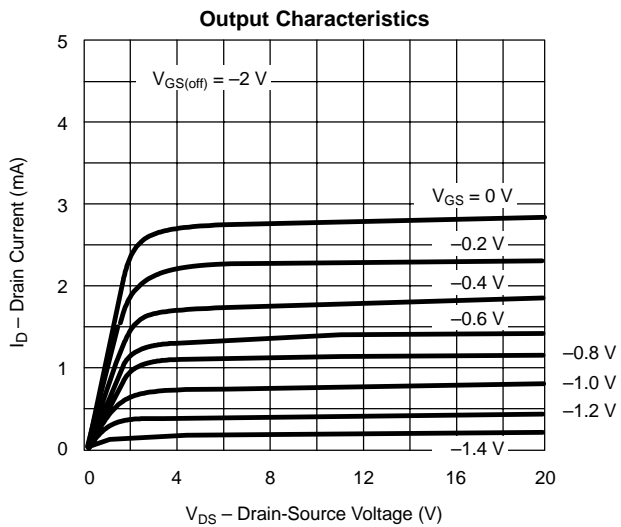
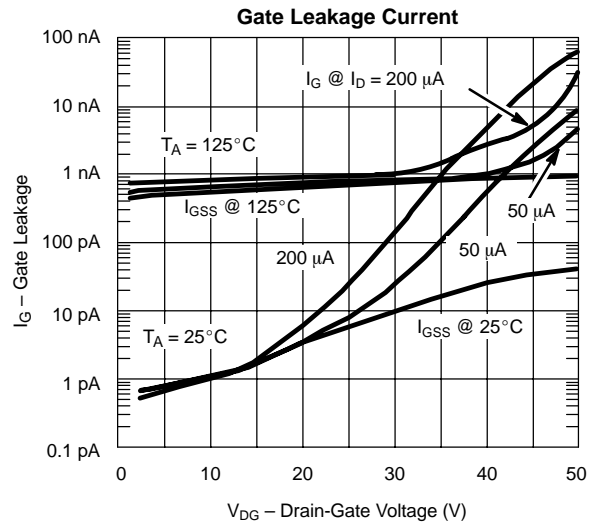
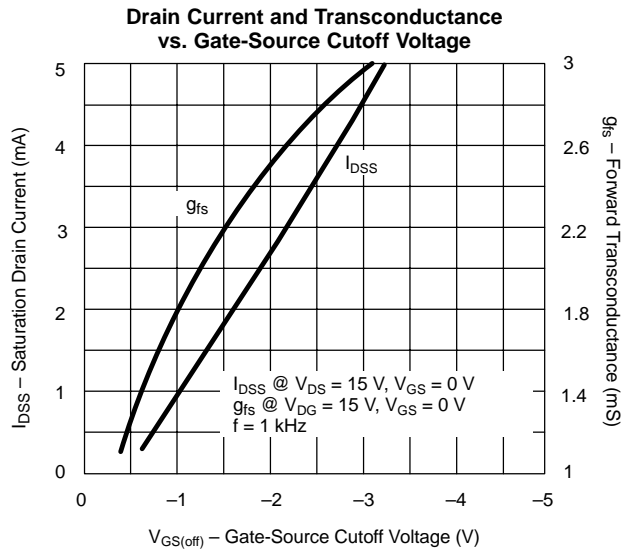




TYPICAL CHARACTERISTICS (T_A = 25°C UNLESS OTHERWISE NOTED)

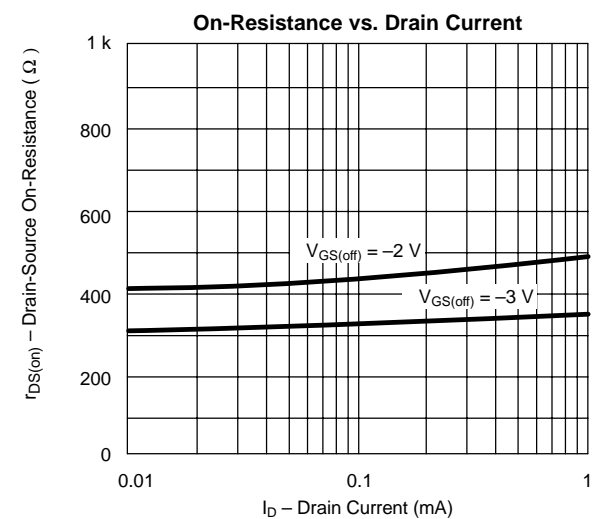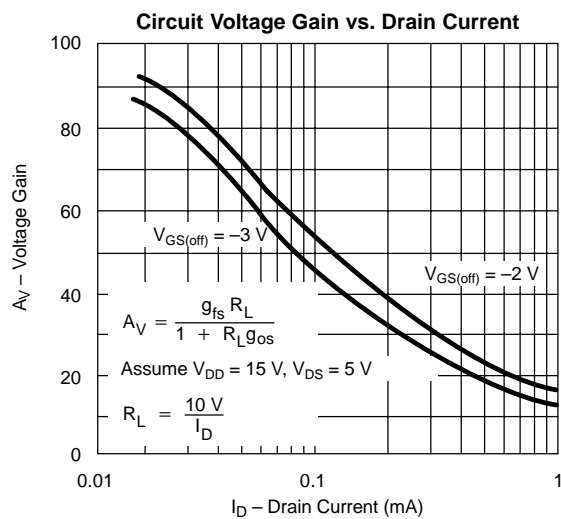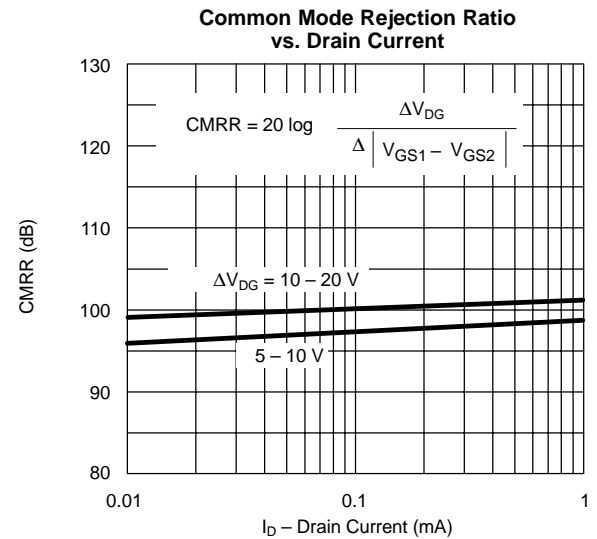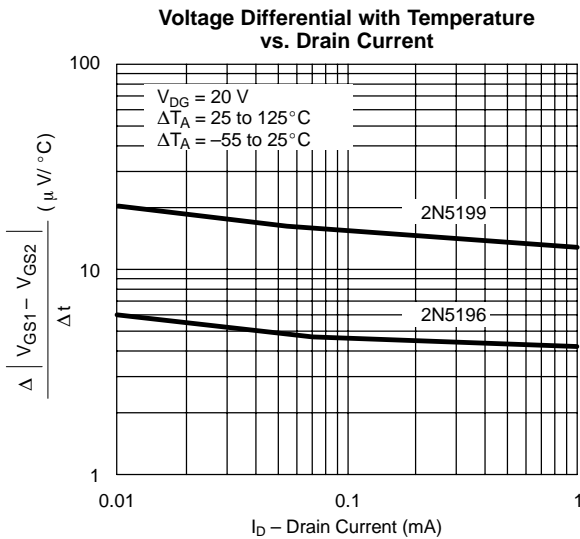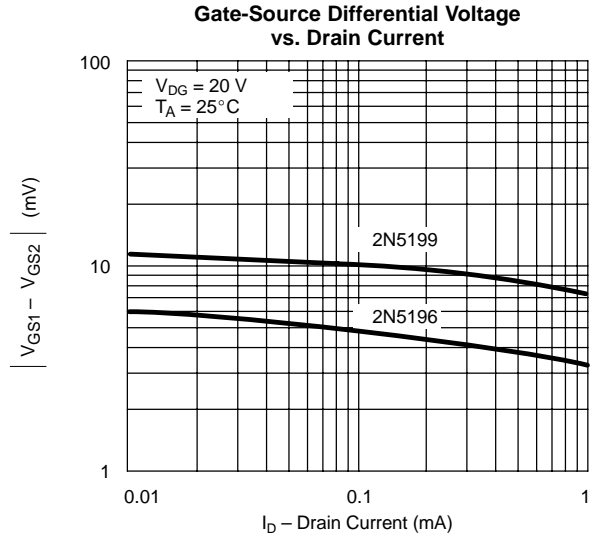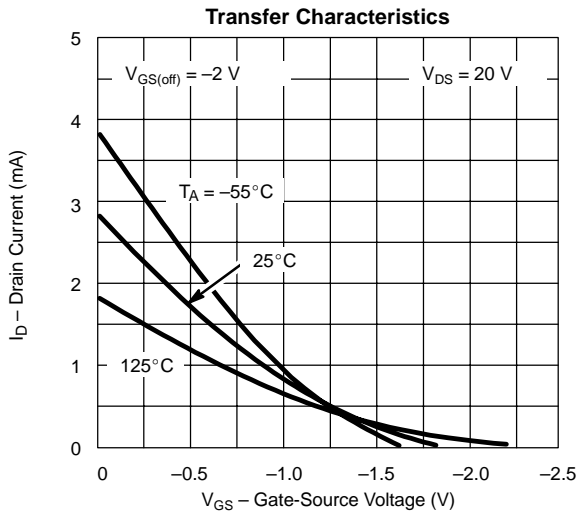

TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

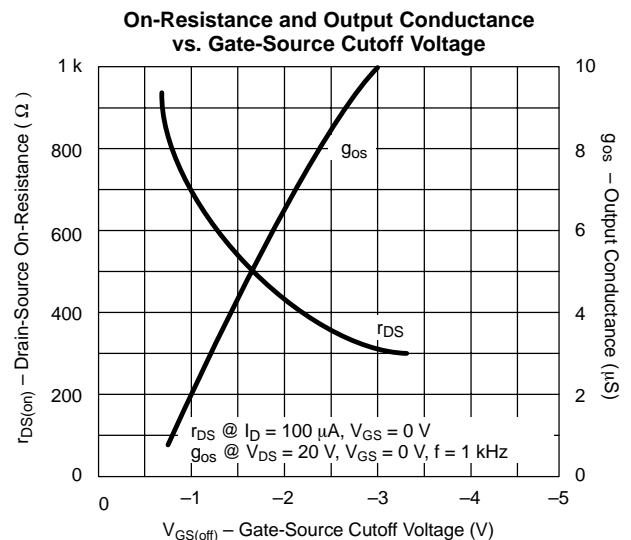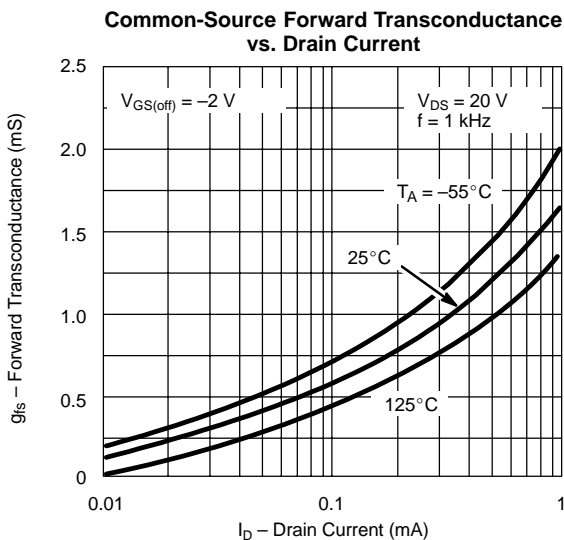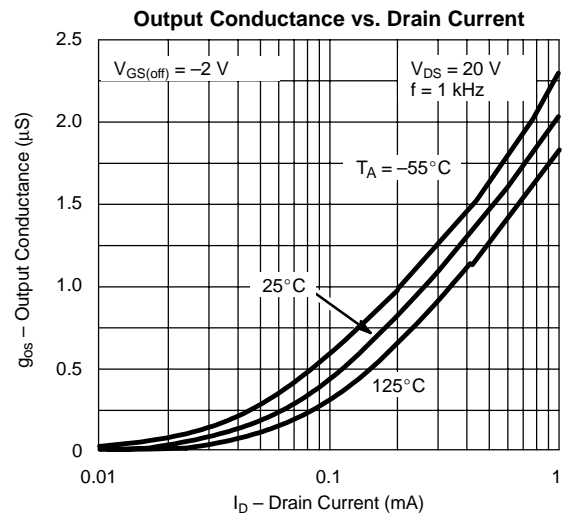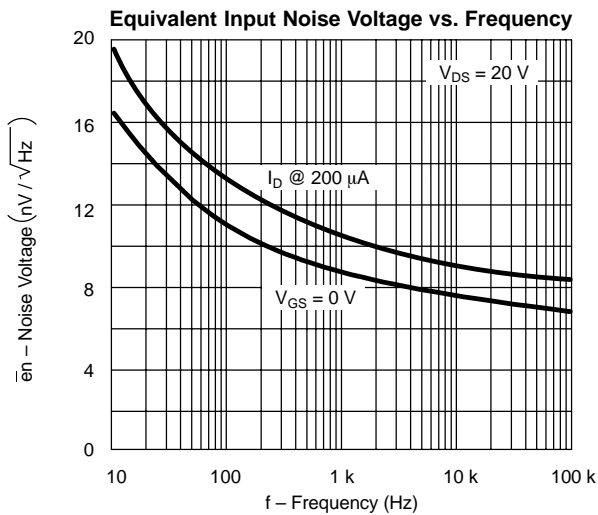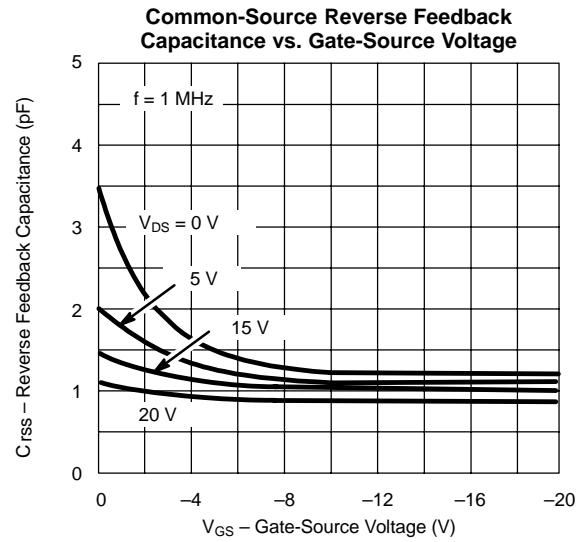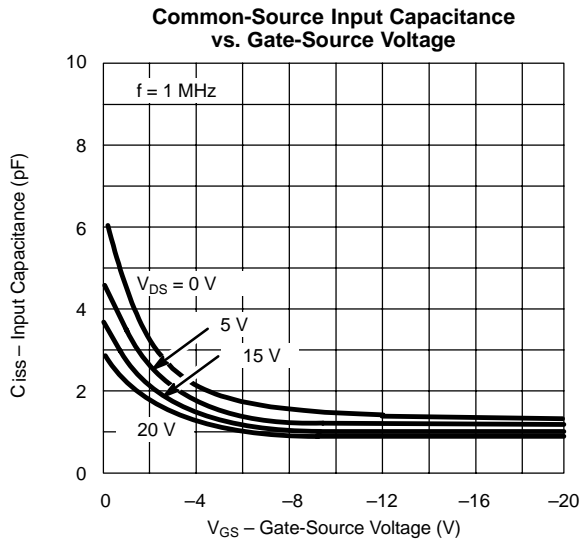



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.