




Dimensions: dimensions are in mm

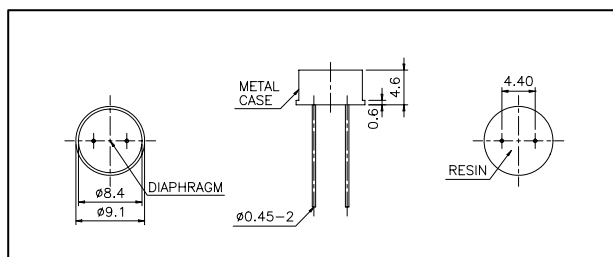

Specification

400ET080	Transmitter
400ER080	Receiver
Center Frequency	40.0±3.0Khz
Bandwidth (-6dB)	400ET080 1.5Khz 400ER080 2.0Khz
Transmitting Sound Pressure Level	100dB min.
at 40.0Khz; 0dB re 0.0002μbar per 10Vrms at 30cm	
Receiving Sensitivity	-80dB min.
at 40.0Khz 0dB = 1 volt/μbar	
Capacitance at 1Khz	±20% 1700 pF
Max. Driving Voltage (cont.)	15Vrms
Total Beam Angle	-6dB 125° typical
Operation Temperature	-30 to 80°C
Storage Temperature	-40 to 85°C

All specification taken typical at 25°C
Closer frequency tolerance can be supplied upon request.


Model available:

1	400ET/R080	Plated Metal Housing
---	------------	----------------------

Impedance/Phase Angle vs. Frequency


Tested under 1Vrms Oscillation Level

400ER080 Impedance ————
 400ER080 Phase
 400ET080 Impedance ————
 400ET080 Phase
 (Note: The legend in the image uses red for 400ER080 and blue for 400ET080.)

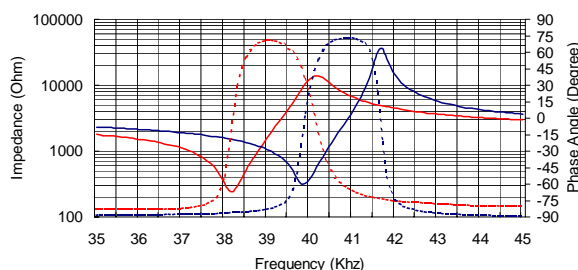


Sensitivity/Sound Pressure Level

Tested under 10Vrms @ 30cm

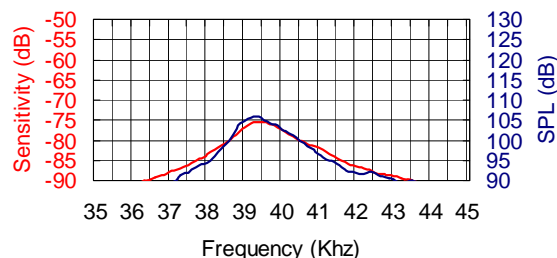


Beam Angle: Tested at 40.0Khz frequency

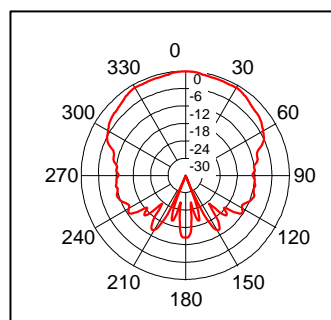


400ER080 Receiver

400ET080 Transmitter


Sensitivity Variation vs. Loaded Resistor

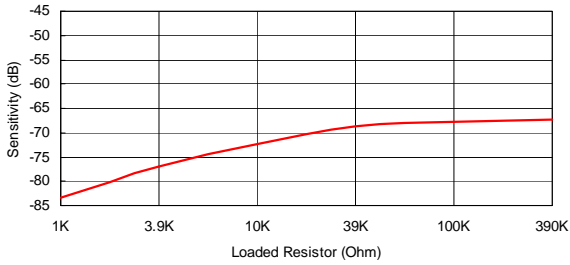


SPL Variation vs. Driving Voltage

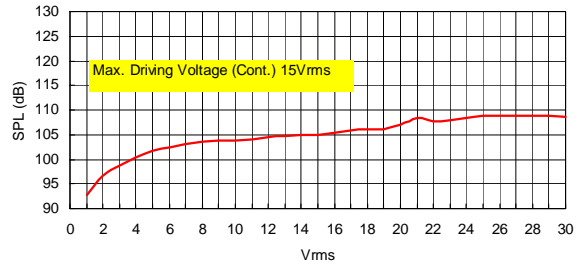


Center Frequency Shift vs. Loaded Resistor

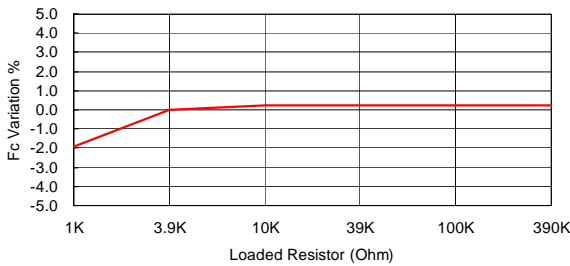


Center Frequency Shift vs. Driving Voltage

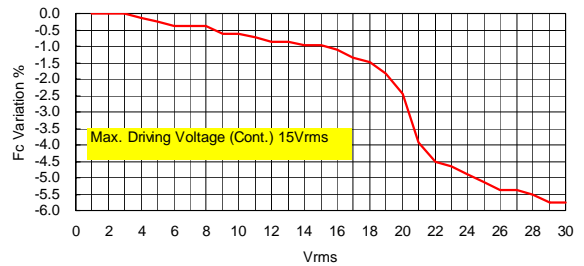


Sensitivity Variation vs. Temperature

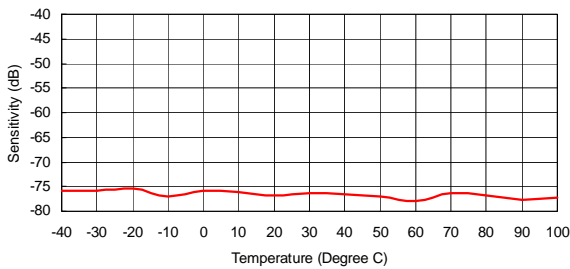

SPL Variation vs. Temperature

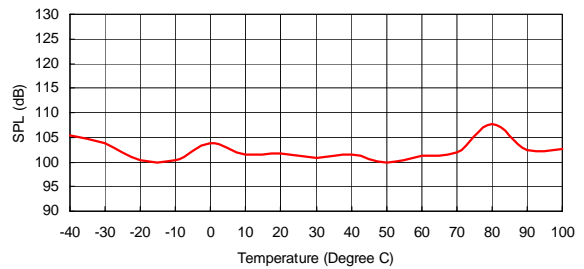

Center Frequency Shift vs. Temperature

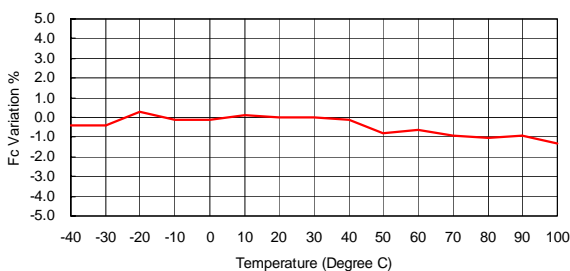

Center Frequency Shift vs. Temperature

