



DATE	REV	DESCRIPTION	BY	CHKD

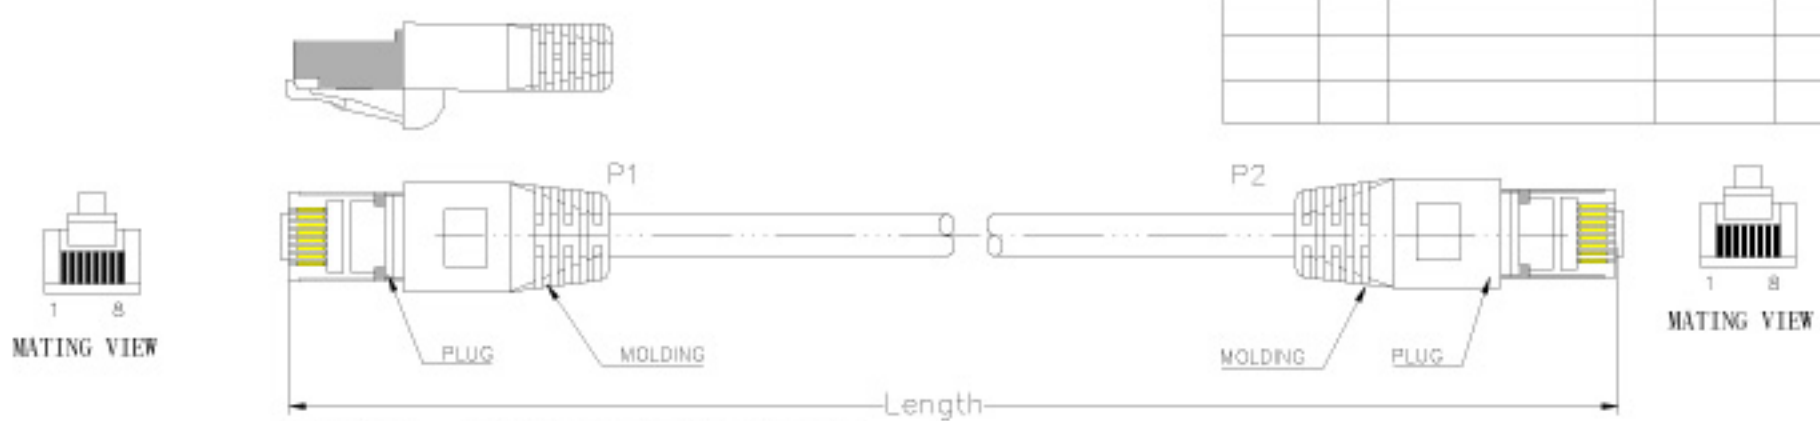

Marking: (LP009) FTP CAT. 5E PATCH ISO/IEC 11801 & EN 50288  
 3P VERIFIED FOR GIGABIT ETHERNET 26AWG×4P TYPE  
 CM(UL)C(UL) CME E164469-F3

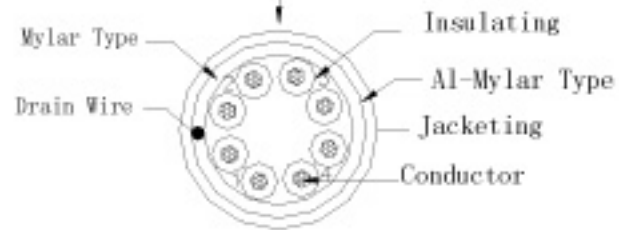

orange 1	green 2
white/orange	white/green
blue 3	brown 4
white/blue	white/brown


PA/R	PINOUT		
	P1 (T568B)	WIRE	P2 (T568B)
1	1	WHT/ORG	1
	2	ORG	2
2	3	WHT/GRN	3
	6	GRN	6
3	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8

<b>Conductor</b>	Bare Copper 26AWG 7/0.15a ± 0.15mm
<b>Insulation</b>	Thickness MIN at any point 0.13mm MAX AVG 0.25mm Diameter 0.70a ± 0.2mm
<b>Jacketing</b>	Thickness MIN at any point 0.80mm MAX AVG 0.85mm Diameter 0.8 ± 0.2mm

<b>WIRE</b>	CAT. 5E FTP STR 26AWG
<b>Plug</b>	YS-02
<b>Length</b>	1M
<b>COLOR</b>	Gray825

Lead	<1000ppm
Cadmium	<100ppm
Mercury	<1000ppm
Chromium	<1000ppm
PBB	<1000ppm
PBDE	<1000ppm

ROHS compliant from OCT. 2004

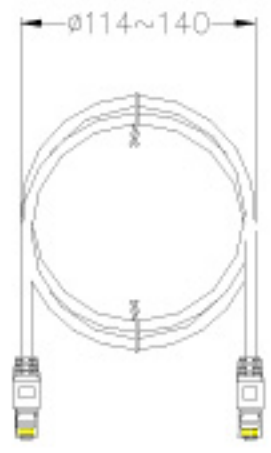

Unless specified on the drawing, tolerances are per the follows:  
 . ± 1  
 .X ± 0.2  
 .XX ± 0.05

3RD

<b>DRAW. NO</b>	YS-02	<b>ITEM</b>	1962-		
<b>DEPARTMENT</b>		<b>DRAW</b>	Peace Jing	<b>DATE</b>	2006/03/20
<b>SCALE</b>		<b>CHECKER</b>		<b>APPROVAL</b>	
<b>UNIT</b>	MM	<b>SHEET</b>	1	OF	1