


100BGQ015

SCHOTTKY RECTIFIER

100 Amp




Major Ratings and Characteristics

Characteristics	100BGQ015	Units
$I_{F(AV)}$ Rectangular waveform @ T_C	100 91	A °C
I_{DC} Maximum	141	A
V_{RRM}	15	V
I_{FSM} @ $t_p = 5 \mu s$ sine	5000	A
V_F @ 100Apk typical @ T_J	0.38 125	V °C
T_J range	-55 to 125	°C

Description/Features

The NEW 100BGQ015 Schottky rectifier has been optimized for ultra low forward voltage drop specifically for the OR-ing of parallel power supplies. The proprietary barrier technology allows for reliable operation up to 125° C junction temperature. Typical applications are in parallel switching power supplies, converters, reverse battery protection, and redundant power subsystems.

- 125° C T_J operation
- Optimized for OR-ing applications
- Ultra low forward voltage drop
- Continuous High Current operation
- Guard ring for enhanced ruggedness and long term reliability
- **PowIRtab™ package**

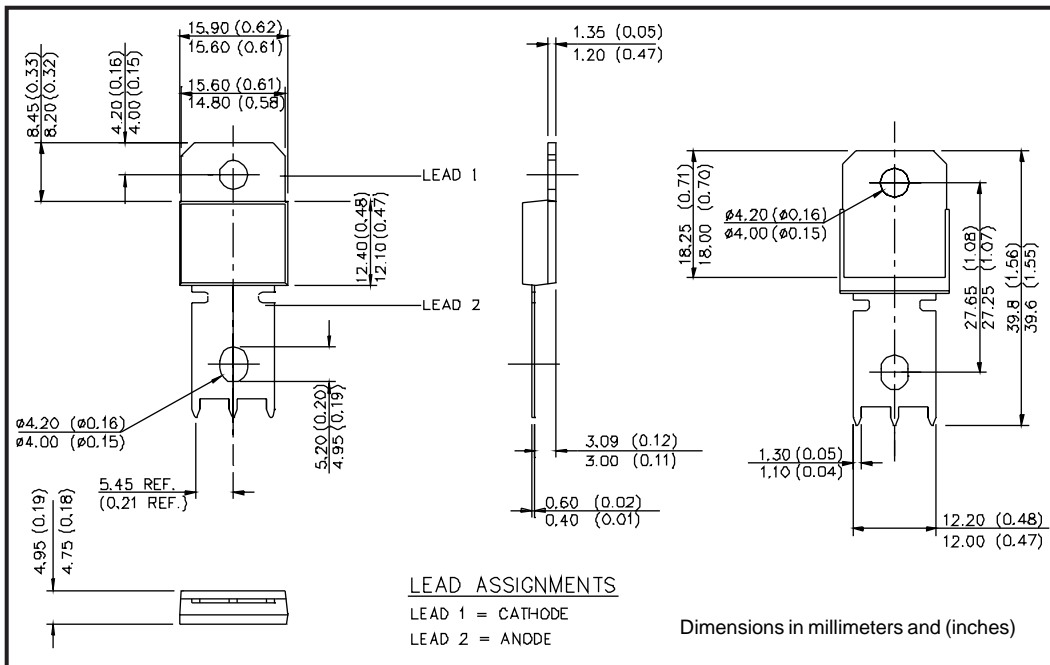

100BGQ015

Preliminary Data Sheet PD-20995 rev. B 02/99



Voltage Ratings

Part number	100BGQ015		
V _R Max. DC Reverse Voltage (V)	@ T _J = 100 °C	15	
V _R Max. DC Reverse Voltage (V)	@ T _J = 125 °C	5	

Absolute Maximum Ratings

Parameters	100BGQ	Units	Conditions
I _{F(AV)} Max. Average Forward Current	100	A	50% duty cycle @ T _C =91°C, rectangular wave form
I _{F(RMS)} RMS Forward Current	141	A	T _C =88°C
I _{FSM} Max. Peak One Cycle Non-Repetitive Surge Current	5000	A	5µs Sine or 3µs Rect. pulse
	1000		10ms Sine or 6ms Rect. pulse
E _{AS} Non-Repetitive Avalanche Energy	9	mJ	T _J =25 °C, I _{AS} = 2 Amps, L = 4.5 mH
I _{AR} Repetitive Avalanche Current	2	A	Current decaying linearly to zero in 1 µsec Frequency limited by T _J max. V _A = 3 x V _R typical

Electrical Specifications

Parameters	100BGQ		Units	Conditions	
	Typ.	Max.			
V _{FM} Forward Voltage Drop (1) (2)	0.34	0.37	V	@ 50A	T _J = 25 °C
	0.42	0.46	V	@ 100A	
	0.26	0.29	V	@ 50A	T _J = 125 °C
	0.38	0.42	V	@ 100A	
I _{RM} Reverse Leakage Current (1)	7	18	mA	T _J = 25 °C	V _R = rated V _R
	580	870	mA	T _J = 100 °C	
	480	700	mA	T _J = 100 °C	V _R = 12V
	1	1.2	A	T _J = 125 °C	V _R = 5V
V _{F(TO)} Threshold Voltage	0.155		V	T _J = T _J max.	
r _t Forward Slope Resistance	2.45		mΩ		
C _T Max. Junction Capacitance	3800		pF	V _R = 5V _{DC} , (test signal range 100Khz to 1Mhz) 25 °C	
L _S Typical Series Inductance	3.5		nH	Measured from tab to mounting plane	
dv/dt Max. Voltage Rate of Change (Rated V _R)	10,000		V/ µs		

(1) Pulse Width < 300µs, Duty Cycle < 2%

(2) V_{FM} = V_{F(TO)} + r_t x I_F

Thermal-Mechanical Specifications

Parameters	100BGQ	Units	Conditions
T _J Max. Junction Temperature Range	-55 to 125	°C	
T _{stg} Max. Storage Temperature Range	-55 to 125	°C	
R _{thJC} Max. Thermal Resistance Junction to Case	0.50	°C/W	DC operation
R _{thCS} Typical Thermal Resistance, Case to Heatsink	0.20	°C/W	Mounting surface, smooth and greased
wt Approximate Weight	5(0.18)	g(oz.)	
T Mounting Torque	Min.	1.2(10)	N*m (lbf-in)
	Max.	2.4(20)	
Case Style	PowIRtab™		

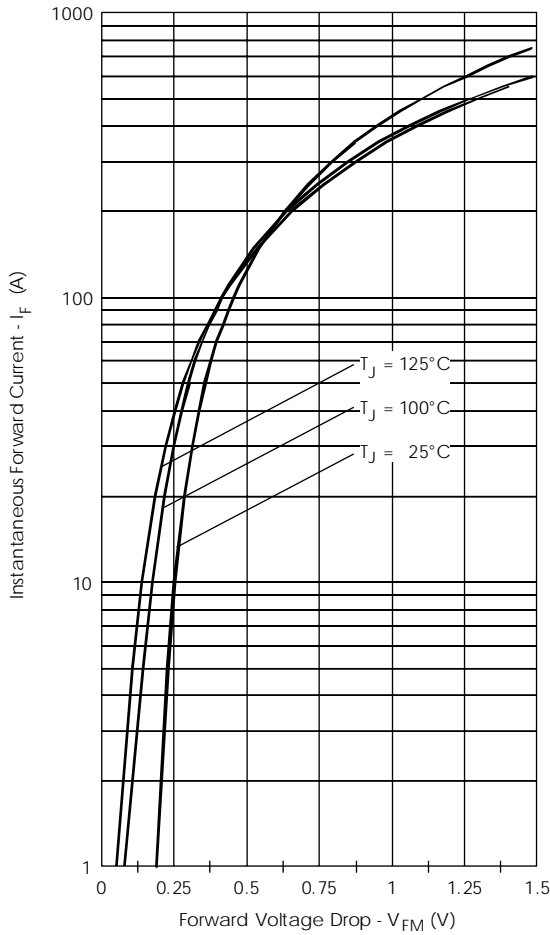


Fig. 1 - Maximum Forward Voltage Drop Characteristics

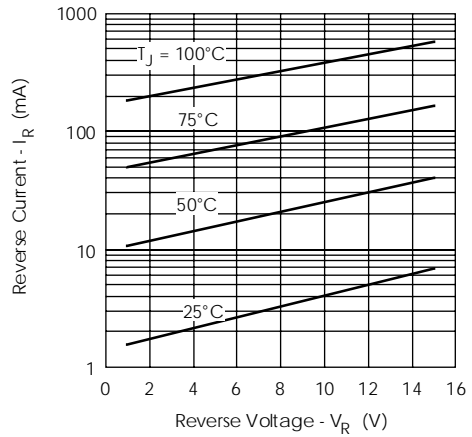


Fig. 2 - Typical Values of Reverse Current Vs. Reverse Voltage

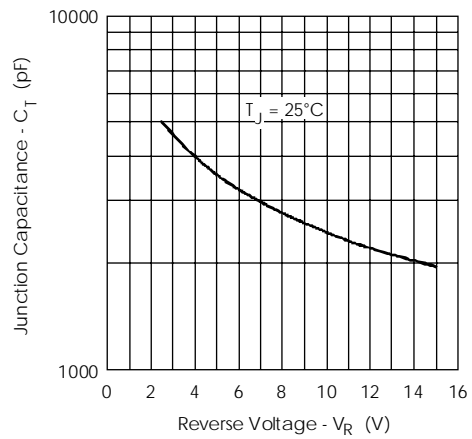


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

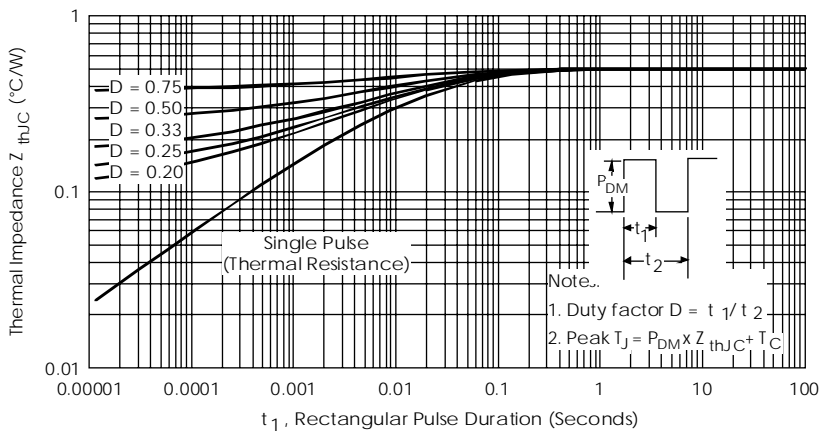


Fig. 4 - Maximum Thermal Impedance Z_{thJC} Characteristics

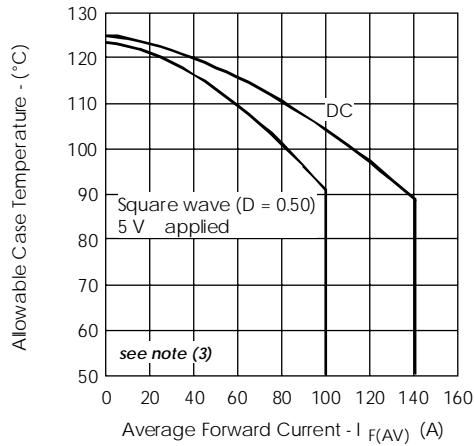


Fig.5- Maximum Allowable Case Temperature Vs. Average Forward Current

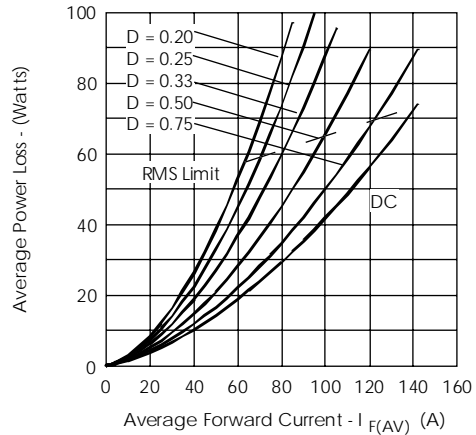


Fig.6- Forward Power Loss Characteristics

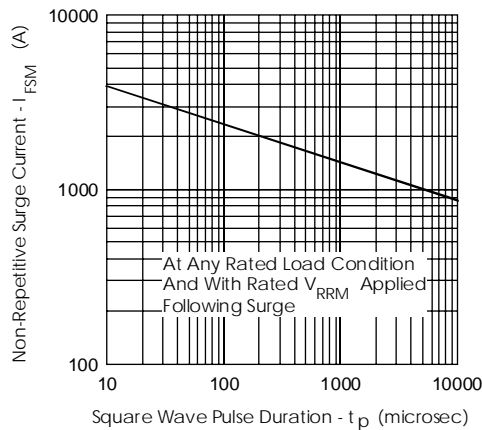


Fig.7- Maximum Non-Repetitive Surge Current

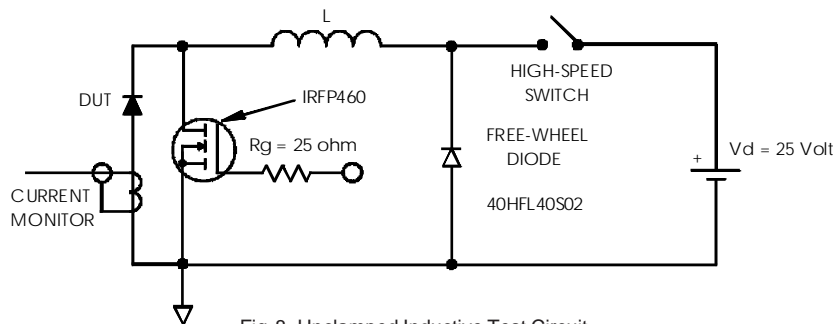


Fig.8- Unclamped Inductive Test Circuit

(3) Formula used: $T_c = T_j - (P_d + P_{d_{REV}}) \times R_{thJC}$;

P_d = Forward Power Loss = $I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 6);

$P_{d_{REV}}$ = Inverse Power Loss = $V_{R1} \times I_R (1 - D)$; $I_R @ V_{R1} = 80\%$ rated V_R

International
IOR Rectifier

WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245 U.S.A. Tel: (310) 322 3331. Fax: (310) 322 3332.
EUROPEAN HEADQUARTERS: Hurst Green, Oxted, Surrey RH8 9BB, U.K. Tel: ++ 44 1883 732020. Fax: ++ 44 1883 733408.
IR CANADA: 15 Lincoln Court, Brampton, Markham, Ontario L6T3Z2. Tel: (905) 453 2200. Fax: (905) 475 8801.
IR GERMANY: Saalburgstrasse 157, 61350 Bad Homburg. Tel: ++ 49 6172 96590. Fax: ++ 49 6172 965933.
IR ITALY: Via Liguria 49, 10071 Borgaro, Torino. Tel: ++ 39 11 4510111. Fax: ++ 39 11 4510220.
IR FAR EAST: K&H Bldg., 2F, 30-4 Nishi-Ikebukuro 3-Chome, Toshima-Ku, Tokyo, Japan 171. Tel: 81 3 3983 0086.
IR SOUTHEAST ASIA: 1 Kim Seng Promenade, Great World City West Tower, 13-11, Singapore 237994. Tel: ++ 65 838 4630.
IR TAIWAN: 16 Fl. Suite D.207, Sec. 2, Tun Haw South Road, Taipei, 10673, Taiwan. Tel: 886 2 2377 9936.

<http://www.irf.com>

Fax-On-Demand: +44 1883 733420

Data and specifications subject to change without notice.