


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART  
CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS				DOC. NO. SPC-F005	Effective: 12/21/98				DCP No. 880
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE	
170	A	RELEASED	HYO	1/21/00	JJC	2/16/00	DJC	2/24/00	

Specifications:

- 1. Color: Black
- 2. Insulator: Polyacetal
- 3. Jack Body: Brass, nickel plated
- 4. Nut: Brass, nickel plated
- 5. Voltage: 500V
- 6. Current: 36A max.
- 7. Temperature: -20°C to +80°C

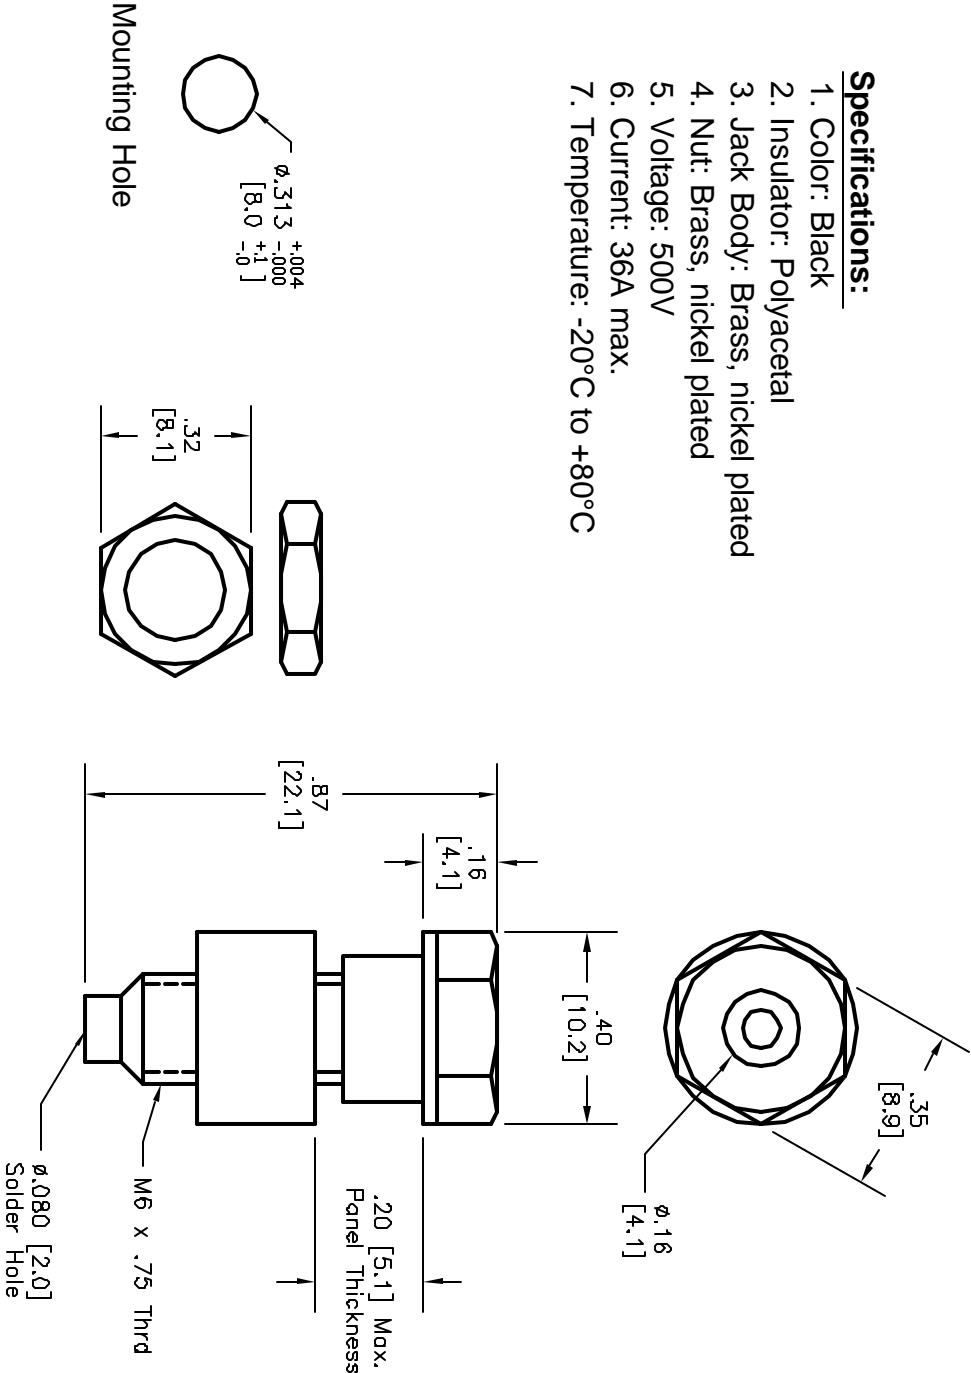

<b>DISCLAIMER</b> ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.				<b>SPC TECHNOLOGY</b>			
Tolerances Unless Otherwise Specified		DRAWN BY:		DATE:		DRAWING TITLE:	
Fractions ± 1/32		HISHAM ODISH		1/21/00		4mm Insulated Jack, Solder	
Decimals		CHECKED BY:		DATE:		SIZE DWG. NO.	
.XX ± .01		JOHN COLE		2/16/00		A 2297	
.XXX ± .005		APPROVED BY:		DATE:		ELECTRONIC FILE	
		DANIEL CAREY		2/24/00		92N4659.dwg	
						REV	
						A	
						SCALE: NTS	
						U.O.M.: INCHES [mm]	
						SHEET: 1 OF 1	