
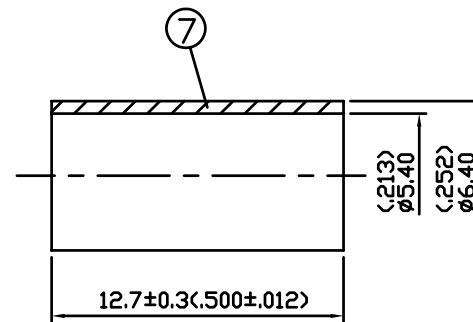
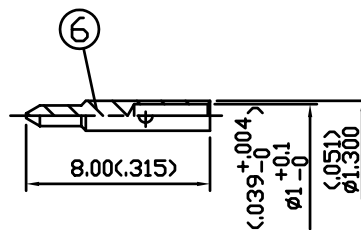


NO	DESCRIPTION	DATE
⚠	BACKGROUND FORMAT UPDATED	06.26.02

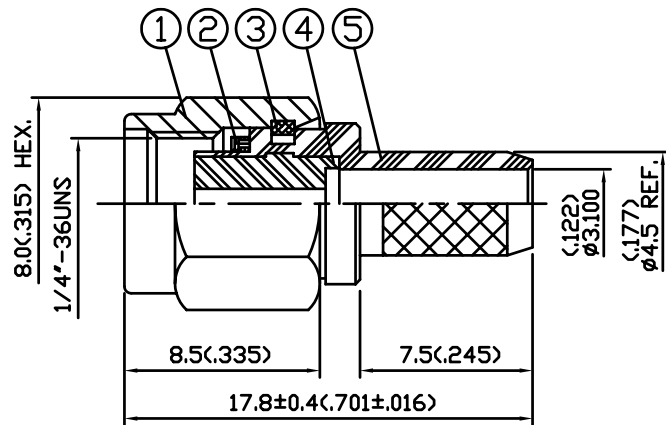

NOTES: UNLESS OTHERWISE SPECIFIED

- BODIES: BRASS PER JIS-C3604
- CENTER CONTACT: BRASS PER JIS-C3604
- INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710
- CRIMP FERRULE: BRASS PER JIS-C2700
- CONNECTOR INTERFACE PER MIL-STD-348A
- PART TO BE CLEAN AND FREE OF BURRS

NO	DESCRIPTION	MATERIAL	Q'TY	FINISH
7	CRIMP FERRULE	BRASS	1	GOLD 3μ" MIN.
6	CENTER CONTACT	BRASS	1	GOLD 50μ" MIN.
5	BODY	BRASS	1	GOLD 3μ" MIN.
4	INSULATION	TEFLON	1	NONE
3	WASHER	STAINLESS STEEL	1	NONE
2	GASKET	SILICONE	1	RED
1	SHELL	BRASS	1	GOLD 3μ" MIN.

製圖	DRAWN	TOLERANCE	品名	19-03-4 58U (500)	日期	DATE	版次	REV.
	梁齡允							
檢圖	CHECK	.XX ±0.1	單位	DWG.NO.	19-0138	佳楠精密電子股份有限公司 CHIN NAN PRECISION ELECTRONICS CO.,LTD.		
	沈淑美	.XXX ±0.05						
認定	APPROVAL	蘇文申	比例	4:1				
		ANGLE ±5°						