

TPC
Metallized Polyester
Film Dielectric Capacitors

Contents



Comparative Table of the Plastic Film Dielectric Characteristics	2
Characteristics of the Metallized Polyester Film Dielectric Capacitors.....	3
Type Selection Guide.....	6
How To Order	7
Types & Taping	
Radial Leads	
BF (CPM-83).....	8
BH (CPM-N).....	10
BT (CPM-85).....	14
BG (CPM-85).....	18
BC/BD	22
BO (CPM-50).....	24
S4 (CPM-13)	28
Axial Leads	
S8 (CPM-8).....	31
SH (CPM-8).....	34
S9 (CPM-72)	38
SG (CPM-72)	41
ST	45
Guide for Customer's Specific Requirements	48
Normalized Series and Associated Values	49

As we are anxious that our customers should benefit from the latest developments in the technology and standards, AVX reserves the right to modify the characteristics published in this brochure.

NOTICE: Specifications are subject to change without notice. Contact your nearest AVX Sales Office for the latest specifications. All statements, information and data given herein are believed to be accurate and reliable, but are presented without guarantee, warranty, or responsibility of any kind, expressed or implied. Statements or suggestions concerning possible use of our products are made without representation or warranty that any such use is free of patent infringement and are not recommendations to infringe any patent. The user should not assume that all safety measures are indicated or that other measures may not be required. Specifications are typical and may not apply to all applications.

Metallized Polyester Film Dielectric Capacitors

Characteristics



INTRODUCTION

The intrinsic characteristics of polyester as a dielectric are:

- dielectric permittivity
- dielectric strength
- range of working temperatures (-55°C to +100°C and up to 125°C for high temperature version).

They are particularly intended for use in bonding, chopping and other applications where the AC component is weak in comparison with the continuous nominal voltage.

TECHNOLOGY EMPLOYED

The outstanding characteristic of the metallized film technology is the self-healing by evaporation of the metallized area round a dielectric fault, thus allowing the electrical insulation of the fault in the film.

PLASTIC FILM DIELECTRIC CHARACTERISTICS

Characteristics	Polypropylene	Polycarbonate	Polystyrene	Polyester
Dielectric Constant (25°C / 50 Hz)	2.2	2.8	2.5	3.2
Minimum Thickness (in micron)	4	2	6	1
Maximum Working Temperature (°C)	100	125	85	125
Can Be Metallized	yes	yes	no	yes
Tangent Of Loss Angle (25°C / 1000 Hz)	2	8	2	50
Insulation Resistance (GΩ x µF)	100	50	100	50
Water Absorption % in weight	< 0.01	0.3	0.1	0.2
Temperature Coefficient (ppm / °C)	-300	±100	-120	+1200
Dielectric Strength (kV / mm)	350	180	150	250

Metallized Polyester Film Dielectric Capacitors

Characteristics

GENERAL ELECTRIC CHARACTERISTICS

Applicable specifications:

- General specifications:
CEI 384-1/CECC 30.000/NFC 83.100
- Sectional specifications:
CEI 384-2/CECC 30.400/ NFC 83.151

1 – Nominal capacitance (C_R) and capacitance tolerances

Nominal capacitance values are based on the E6 and E12 series (see tables of standard values on inside back cover) and their multiples and decimals with the associated tolerances are shown in the table below.

Tolerances	
Values	Code
5%	J
10%	K
20%	M

• Capacitance measurement between terminals:


Measurement frequency:

$$\begin{aligned} 1 \text{ kHz } (\pm 0.1 \text{ kHz}) &\rightarrow C_R \leq 1 \mu\text{F} \\ 100 \text{ Hz } (\pm 5 \text{ Hz}) &\rightarrow C_R > 1 \mu\text{F} \end{aligned}$$


• Measurement voltage

Peak value of applied voltage should not exceed, at 1kHz, 3% of the nominal voltage V_R and at 100 Hz, 20% of the nominal value with a maximum of 100 V (70 V_{RMS}).

TYPICAL CURVES

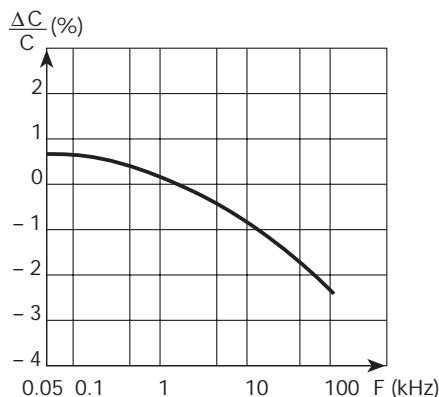

T: Room Temperature

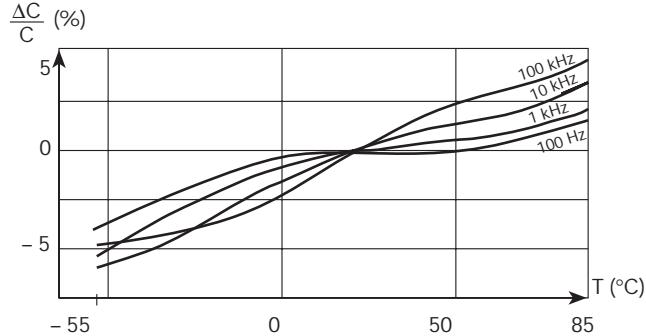

Metallized Polyester Film Dielectric Capacitors

Characteristics



2 - DC nominal voltage (V_R)

The nominal voltage is the maximum DC voltage that may be applied to the capacitor at a temperature of 85°C.

Standard values: the standard values of the nominal voltage comply with the R5 basic series standard numbers in the ISO R3 recommendation (25-40-63-100-160) and their multiples and decimals.

3 - AC nominal voltage (V_R)

The frequency is 50 Hz unless a higher frequency is specified.

4 - Category voltage (V_C)

The voltage category is the voltage that can be applied to a capacitor used at the maximum temperature of its category. This voltage is specified in the data sheet or detailed specification for each product.

5 - Test voltage (V_E)

The test voltage applied between output terminals is a DC voltage equal to:

- $1.4 V_R$ - for 1 minute for Class 2 capacitors (general use)
- $1.6 V_R$ - for 1 minute for Class 1 capacitors (long life)

6 - Tangent of loss angle (D.F.)

Measurement conditions:


- identical to those for the measurement of capacitance between terminals.

Requirements:


- the tangent of loss angle should not exceed the values shown in the table below.

Measurement frequency	Capacitance	D.F.	
		Performance category 1	Performance category 2
1 kHz	$C_R \leq 1 \mu F$	$\leq 0.8\%$	$\leq 1.0\%$
100 Hz	$C_R > 1 \mu F$	$\leq 1\%$	$\leq 1.0\%$

TYPICAL CURVES

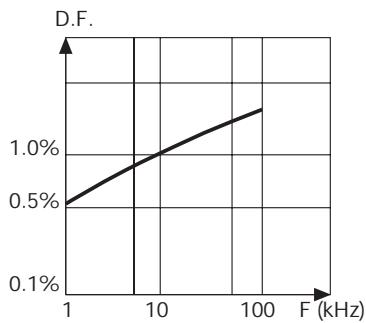

T: Room Temperature

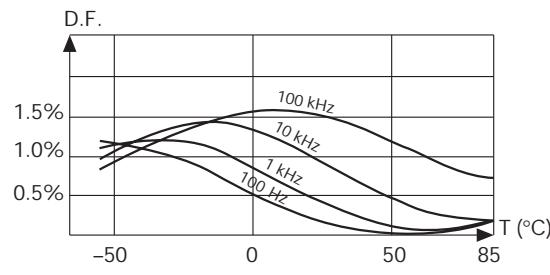

Metallized Polyester Film Dielectric Capacitors

Characteristics

7 - Insulation resistance (IR)

Measurement conditions:

- The opposite table gives the measurement voltages in relation to the nominal voltage of the capacitor, unless otherwise specified.

Requirements:


- The insulation resistance should meet the values shown in the table below at 20°C.

Nominal Voltage	Measurement Voltage
$V_{R^-} < 10 \text{ V}$	$V_R \pm 10\%$
$10 \text{ V} \leq V_{R^-} < 100 \text{ V}$	$10V \pm 1 \text{ V}$
$100 \text{ V} \leq V_{R^-} < 500 \text{ V}$	$100V \pm 15 \text{ V}$
$500 \text{ V} \leq V_{R^-}$	$500V \pm 50 \text{ V}$

Measuring Points	$C_R \leq 0.33 \mu\text{F}$				$C_R > 0.33 \mu\text{F}$			
	IR min ($\text{G}\Omega$)				IR $\times C_R$ min ($\text{M}\Omega \times \mu\text{F}$)			
	Performance Class 1		Performance Class 2		Performance Class 1		Performance Class 2	
Between Terminals	$V_{R^-} \leq 100 \text{ V}$	$V_{R^-} > 100 \text{ V}$	$V_{R^-} \leq 100 \text{ V}$	$V_{R^-} > 100 \text{ V}$	$V_{R^-} \leq 100 \text{ V}$	$V_{R^-} > 100 \text{ V}$	$V_{R^-} \leq 100 \text{ V}$	$V_{R^-} > 100 \text{ V}$
	15	30	3.75	7.5	5,000	10,000	1,250	2,500
Between Terminals and Ground	$\geq 30,000 \text{ M}\Omega$							

TYPICAL CURVE


Insulation resistance vs. temperature $IR = f(T) \text{ } ^\circ\text{C}$.

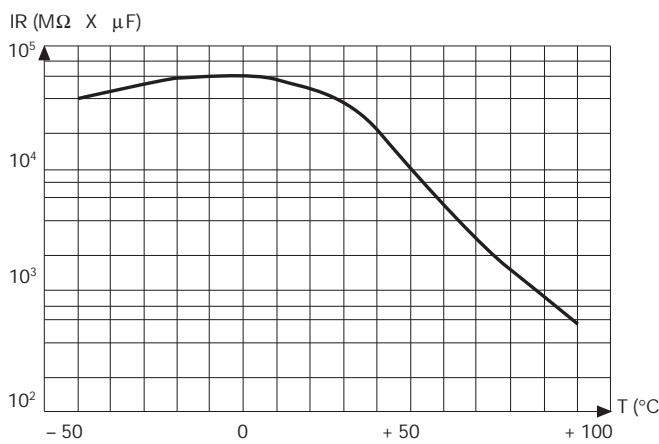

8 - Voltage gradient (dv/dt)_R

- Pulses under V_R

Example:

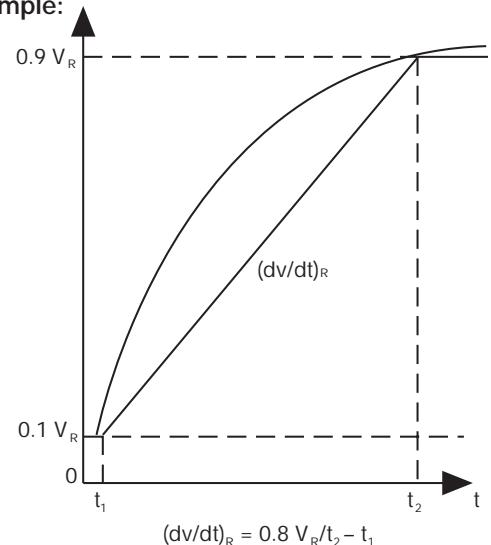

- Pulses under V_A
maximum voltage gradients of the capacitor under V_A :

$$(dv/dt)_{Amax} = \frac{V_R}{V_A} \times (dv/dt)_{Rmax}$$

Metallized Polyester Film Dielectric Capacitors

Type Selection Guide



Presentation	Type		Nominal Voltage		Capacitance Range (C_R)	Tolerance on C_R (Series)	Lead Spacing mm (inches)
	TPC	UTE	V_{R-} (V)	V_{R+} (V)			
Radial Leads	BF	CPM-83 C83151	63 ... 400	40 ... 200	1 nF ... 2.2 μ F	$\pm 5\%$ (E6 - E12) $\pm 10\%$ (E6 - E12)	5.08 (0.200)
	BH	CPM-N C83151	63 ... 400	40 ... 200	1 nF ... 2.2 μ F	$\pm 5\%$ (E6 - E12) $\pm 10\%$ (E6 - E12)	5.08 (0.200)
	BT	CPM85 C83151	63 ... 630	40 ... 220	1 nF ... 22 μ F	$\pm 5\%$ (E6 - E12) $\pm 10\%$ (E6 - E12) $\pm 20\%$ (E6 - E12)	7.5 (0.295) 10.0 (0.394) 15.0 (0.591) 22.5 (0.886) 27.5 (1.083)
	BG	CPM85 C83151	63 ... 1,000	40 ... 250	1 nF ... 22 μ F	$\pm 5\%$ (E6 - E12) $\pm 10\%$ (E6 - E12) $\pm 20\%$ (E6 - E12)	7.5 (0.295) 10.0 (0.394) 15.0 (0.591) 22.5 (0.886) 27.5 (1.083)
	BC / BD		250	-	0.47 μ F ... 2.2 μ F	$\pm 5\%$ $\pm 10\%$	15.0 (0.591)
	BO	CPM50 C83151	40 ... 400	25 ... 200	1 nF ... 22 μ F	$\pm 5\%$ (E6 - E12) $\pm 10\%$ (E6 - E12) $\pm 20\%$ (E6 - E12)	7.5 (0.295) 10.0 (0.394) 15.0 (0.591) 27.5 (1.083)
	S4	CPM13 C83151	63 ... 400	40 ... 200	1 nF ... 10 μ F	$\pm 5\%$ (E6 - E12) $\pm 10\%$ (E6 - E12) $\pm 20\%$ (E6 - E12)	7.62 (0.300) 10.16 (0.400) 15.24 (0.600) 27.94 (1.100)

Axial Leads	S8	CPM8 C83151	63 ... 400	40 ... 200	1 nF ... 10 μ F	$\pm 5\%$ (E6 - E12) $\pm 10\%$ (E6 - E12) $\pm 20\%$ (E6 - E12)	
	SH	CPM8 C83151	63 ... 1,000	40 ... 250	1 nF ... 22 μ F	$\pm 5\%$ (E6 - E12) $\pm 10\%$ (E6 - E12) $\pm 20\%$ (E6 - E12)	
	S9	CPM72 C83151	100 ... 630	40 ... 220	1 nF ... 10 μ F	$\pm 5\%$ (E6 - E12) $\pm 10\%$ (E6 - E12) $\pm 20\%$ (E6 - E12)	
	SG	CPM72 C83151	63 ... 1,000	40 ... 250	1 nF ... 22 μ F	$\pm 5\%$ (E6 - E12) $\pm 10\%$ (E6 - E12) $\pm 20\%$ (E6 - E12)	
	ST		630 ... 10,000		100 pF ... 1.5 μ F	$\pm 5\%$ (E6 - E12) $\pm 10\%$ (E6 - E12) $\pm 20\%$ (E6 - E12)	

Metallized Polyester Film Dielectric Capacitors



HOW TO ORDER

Example of an order: how to order a CPM85 100 nF ±10% 100 V.

BT07	4	E	0104	K	--
Identification Code	Dielectric Class	Voltage Code	Capacitance (EIA code)	Tolerance Code	Suffix
Radial Leads					
CPM83 BF 01		C = 25/40 V	Capacitance expressed by 2 significant figures	J = ±5%	DA - DB - DC - DD: lead spacing
CPM83 BF 02		D = 50/63 V	1st digit: 0 (zero)	K = ±10%	5.08 mm taped on reel or
CPM83 BF 05		E = 100 V	2nd and 3rd digit: the 2 significant figures of the capacitance value	M = ±20%	ammopack
CPM83 BF 06		F = 160/200 V	4th digit:		
CPM83 BF 07		G = 250 V	- for values ≥ 10 pF and ≤ 990 µF: the number of zeros to be added to the capacitance values		EN
CPM-N BH 01		H = 275/300 V	- for values ≥ 1 pF and ≤ 9.9 pF: the numerical 9 signifying that the capacitance value is to be multiplied by 0.1		Radial types: lead spacing 7.5/10/15 mm taped on reel H=16.5 mm
CPM-N BH 02		I = 400 V	- for values < 1 pF: the numerical 8 signifying that the capacitance value is to be multiplied by 0.01		Axial type: (SG series only) Ammopack
CPM-N BH 05		J = 500 V	Example:		EP: Taped on reel H=18.5 mm (only for BG type)
CPM-N BH 06		K = 600/630 V	1000 pF = 0102		GA or GB: standard axial taped
CPM-N BH 07		L = 1000 V	8.2 pF = 0829		(S8, S9, ST types)
CPM85 BT 07		M = 1600 V	0.47 pF = 0478		-- Bulk
CPM85 BT 10		N = 2000 V			
CPM85 BT 15		P = 2500 V			
CPM85 BT 22		Q = 3000 V			
CPM85 BT 27		R = 4000 V			
CPM85 BG 07		S = 5000 V			
CPM85 BG 10		T = 6000/6300 V			
CPM85 BG 15		U = 8000 V			
CPM85 BG 22		V = 10 kV			
CPM85 BG 27					
- BC 15					
- BD 15					
CPM50 BO 07					
CPM50 BO 10					
CPM50 BO 15					
CPM50 BO 27					
CPM13 S4 07					
CPM13 S4 10					
CPM13 S4 15					
CPM13 S4 27					
Axial Leads					
CPM8 S8 10					
CPM8 S8 14					
CPM8 S8 18					
CPM8 S8 31					
CPM8 SH 13					
CPM8 SH 18					
CPM8 SH 25					
CPM8 SH 30					
CPM8 SH 40					
CPM72 S9 10					
CPM72 S9 14					
CPM72 S9 18					
CPM72 S9 27					
CPM72 S9 31					
CPM72 SG 13					
CPM72 SG 18					
CPM72 SG 25					
CPM72 SG 30					
CPM72 SG 40					
- ST 22					
- ST 36					

CPM-83 — 5.08 Radial Leads 63/100/250/400 V-

APPLICATIONS

Non-inductive, self-healing, metallized polyester film capacitor. Insulated* thermoplastic casing, epoxy resin sealed with stand-offs*. Radial connections with a lead spacing of 5.08 mm.

* Flame retardant resin and case according to UL 94 VO.

Some examples of use:

Supply decoupling, filter, integrators, treatment of analog signals, rejection of line perturbations, etc.

STANDARDIZATION

Generic specifications:

CEI 384-1/CECC 30000/UTE 83100

Sectional specifications:

CEI 384-2/CECC 30400/UTE 83151

Complies with special specification:


CECC 30401-063

On the LNZ list:

Complies with type CPM-N

RAQ2 production, equivalent AQAP-4 of NATO

Schematic Cross Section

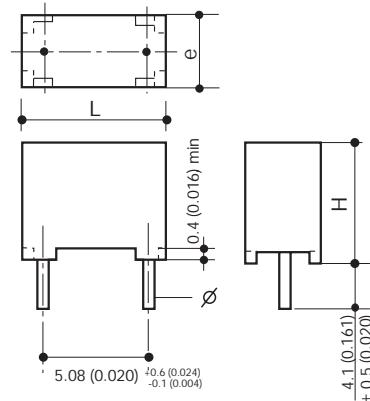

DIMENSIONS:

millimeters (inches)

Case	L max.	H max.	e max.	$\phi \pm 0.02$	Observations
01	7.5 (0.295)	6.5 (0.256)	2.5 (0.098)	0.5 (0.020)	$1nF \leq C_R \leq 220nF$
02	7.5 (0.295)	8.0 (0.315)	3.2 (0.126)	0.5 (0.020)	$12nF \leq C_R \leq 330nF$
05	7.5 (0.295)	12.0 (0.472)	6.0 (0.236)	0.5 (0.020)	$560nF \leq C_R \leq 2.2\mu F$
06	7.5 (0.295)	9.6 (0.378)	6.0 (0.236)	0.5 (0.020)	$47nF / 400V$
07	7.5 (0.295)	8.0 (0.315)	5.0 (0.197)	0.5 (0.020)	$27nF \leq C_R \leq 1\mu F$

HOW TO ORDER

BF 01



Type

4



Class

D



Voltage

0104



Capacitance Value

K



Tolerance

--



Suffix

PERFORMANCE CHARACTERISTICS

Climatic category:	55/100/56 - Performance Class 2
Capacitance range:	C_R 1 nF to 2.2 μF (E12)
Tolerances on C_R :	$\pm 5\%$, $\pm 10\%$ (other values on request)
Nominal voltages:	V_{R-} 63/100/250/400 V V_{R-} 40/63/160/200 V
Category voltage:	$V_C = 0.8 V_{R-}$ at 100°C
Test voltage:	$V_e = 1.6 V_{R-}/2$ s at 25°C
Tangent of loss angle:	D.F. (see page 4)
Insulation resistance:	IR (see page 5)
Max. voltage gradient:	$(dv/dt)_R$ (see page 5)

V_{R-}	63	100	250	400
$(dv/dt)_R$ max	38	40	110	270

MARKING

100 nK 63
DC nominal voltage
Nominal capacitance
Tolerance (EIA code)
Logo
Example above: 63 V_{DC}, 100nF, $\pm 10\%$

**CAPACITANCE VALUES (C_R) AND
NOMINAL VOLTAGES (V_R) VS CASE SIZE**

Capacitance Range (C_R)	Reference			
	BF			
	V_{R-}/V_{R-}			
	63/40	100/63	250/160	400/200
1,000 pF	BF01	BF01	BF01	BF01
1,200	BF01	BF01	BF01	BF01
1,500	BF01	BF01	BF01	BF01
1,800	BF01	BF01	BF01	BF01
2,200 pF	BF01	BF01	BF01	BF01
2,700	BF01	BF01	BF01	BF01
3,300	BF01	BF01	BF01	BF01
3,900	BF01	BF01	BF01	BF01
4,700 pF	BF01	BF01	BF01	BF01
5,600	BF01	BF01	BF01	BF01
6,800	BF01	BF01	BF01	BF01
8,200	BF01	BF01	BF01	BF01
10,000 pF	BF01	BF01	BF01	BF01
12,000	BF01	BF01	BF01	BF02
15,000	BF01	BF01	BF01	BF02
18,000	BF01	BF01	BF01	BF02
22,000	BF01	BF01	BF01	BF02
27,000	BF01	BF01	BF01	BF07
33,000	BF01	BF01	BF02	BF07
39,000	BF01	BF01	BF02	BF07
47,000 pF	BF01	BF01	BF02	BF06
56,000	BF01	BF01	BF07	
68,000	BF01	BF01	BF07	
82,000	BF01	BF01	BF07	
100 nF	BF01	BF01	BF07	
120	BF01	BF01		
150	BF01	BF01		
180	BF01	BF07		
220 nF	BF01	BF07		
270	BF02	BF07		
330	BF02	BF07		
390	BF07/BF02*	BF07		
470 nF	BF07/BF02*	BF07		
560	BF07	BF05		
680	BF07	BF05		
820	BF07	BF05		
1 μ F	BF07	BF05		
1.5 μ F	BF05			
2.2 μ F	BF05**			

* Upon request

** Upon request & only available 50 V (V_R)

CPM-N — 5.08 Radial Leads 63/100/250/400 V-

APPLICATIONS

Non-inductive, self-healing, metallized polyester film capacitor. Insulated* thermoplastic casing, epoxy resin sealed with stand-offs*. Radial connections with a lead spacing of 5.08 mm.

* Flame retardant case according to UL 94 VO.

Some examples of use:

Supply decoupling, filter, integrators, treatment of analog signals, rejection of line perturbations, etc... Specifically designed for working in severe environmental conditions such as automotive applications: engine control, multiplexing system, etc.

STANDARDIZATION

Generic specifications:

CEI 384-1/CECC 30000/UTE 83100

Sectional specifications:


CEI 384-2/CECC 30400/UTE 83151

On the LNZ list:

Complies with type CPM-N

RAQ2 production, equivalent AQAP-4 of NATO

Schematic Cross Section

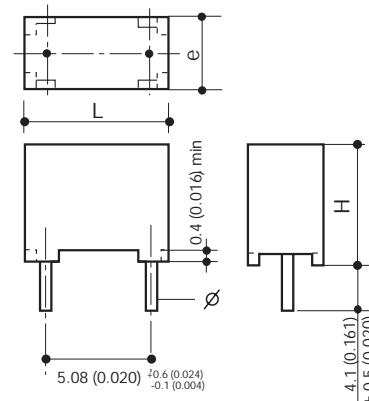

DIMENSIONS:

millimeters (inches)

Case	L max.	H max.	e max.	$\phi \pm 0.02$	Observations
01	7.5 (0.295)	6.5 (0.256)	2.5 (0.098)	0.5 (0.020)	$1nF \leq C_R \leq 220nF$
02	7.5 (0.295)	8.0 (0.315)	3.2 (0.126)	0.5 (0.020)	$5.6nF \leq C_R \leq 330nF$
05	7.5 (0.295)	12.0 (0.472)	6.0 (0.236)	0.5 (0.020)	$39nF \leq C_R \leq 2.2\mu F$
06	7.5 (0.295)	9.6 (0.378)	6.0 (0.236)	0.5 (0.020)	$18nF \leq C_R \leq 100nF$
07	7.5 (0.295)	8.0 (0.315)	5.0 (0.197)	0.5 (0.020)	$8.2nF \leq C_R \leq 1\mu F$

HOW TO ORDER

BH 01



Type

4



Class

D



Voltage

0104



Capacitance Value

K



Tolerance

--



Suffix

PERFORMANCE CHARACTERISTICS

Climatic category: 55/125/56 - Performance Class 2

Capacitance range: C_R 1 nF to 2.2 μF (E12)

Tolerances on C_R : $\pm 5\%$, $\pm 10\%$
(other values on request)

Nominal voltages: V_{R^-} 63/100/250/400 V
 V_{R^-} 40/63/160/200 V

Category voltage: $V_C = 0.8 V_{R^-}$ at $100^\circ C$ /0.5 V_{R^-}
at $125^\circ C$

Test voltage: $V_e = 1.6 V_{R^-}/2$ s at $25^\circ C$

Tangent of loss angle: D.F. (see page 4)

Insulation resistance: IR (see page 5)

Max. voltage gradient: $(dv/dt)_R$ (see page 5)

Life test: $\Delta C/C \leq 5\%$ after $125^\circ C/1000$
h/0.5 V_{R^-}

Thermal shock: $-55/+125^\circ C/time$ cycle 1hr/500
cycles $\Delta C/C \leq 10\%$, D.F. 1kHz $\leq 1\%$

Humidity test: $85^\circ C/85\% R.H./1000$ h $\Delta C/C \leq 10\%$

MARKING

D 104 K E 49

DC nominal voltage

Nominal capacitance (EIA code)

Tolerance (EIA code)

Logo

Lot number

Example above: 63 V_{DC} , 100nF, $\pm 10\%$

V_{R^-}	63	100	250	400
$(dv/dt)_R$ max	38	40	110	270

**CAPACITANCE VALUES (C_R) AND
NOMINAL VOLTAGES (V_R) vs CASE SIZE**


Capacitance Range (C_R)	Reference			
	BH			
	V_{R+}/V_{R-}			
	63/40	100/63	250/160	400/200
1,000 pF	BH01	BH01	BH01	BH01
1,200	BH01	BH01	BH01	BH01
1,500	BH01	BH01	BH01	BH01
1,800	BH01	BH01	BH01	BH01
2,200 pF	BH01	BH01	BH01	BH01
2,700	BH01	BH01	BH01	BH01
3,300	BH01	BH01	BH01	BH01
3,900	BH01	BH01	BH01	BH01
4,700 pF	BH01	BH01	BH01	BH01
5,600	BH01	BH01	BH01	BH02
6,800	BH01	BH01	BH01	BH02
8,200	BH01	BH01	BH01	BH07
10,000 pF	BH01	BH01	BH01	BH07
12,000	BH01	BH01	BH01	BH07
15,000	BH01	BH01	BH01	BH07
18,000	BH01	BH01	BH01/BH02*	BH06/BH05*
22,000	BH01	BH01	BH02	BH06/BH05*
27,000	BH01	BH01	BH02	BH06/BH05*
33,000	BH01	BH01	BH02	BH06/BH05*
39,000	BH01	BH01	BH07	BH05
47,000 pF	BH01	BH01	BH07	BH05
56,000	BH01	BH01	BH07	
68,000	BH01	BH01	BH07	
82,000	BH01	BH01	BH06/BH05*	
100 nF	BH01	BH01	BH06/BH05*	
120	BH01	BH01/BH07*	BH05	
150	BH01	BH01/BH07*	BH05	
180	BH01	BH02/BH07*		
220 nF	BH01/BH02*	BH02/BH07*		
270	BH02	BH07		
330	BH02	BH07		
390	BH07	BH07/BH05*		
470 nF	BH07	BH05		
560	BH07	BH05		
680	BH07/BH06*	BH05		
820	BH07/BH06*	BH05		
1 μ F	BH07/BH06*	BH05		
1.5 μ F	BH05			
2.2 μ F	BH05**			

** ($V_R = 50$ V)


* Upon request

CHARACTERISTICS CURVES

Influence of the frequency on the impedance (room temperature).

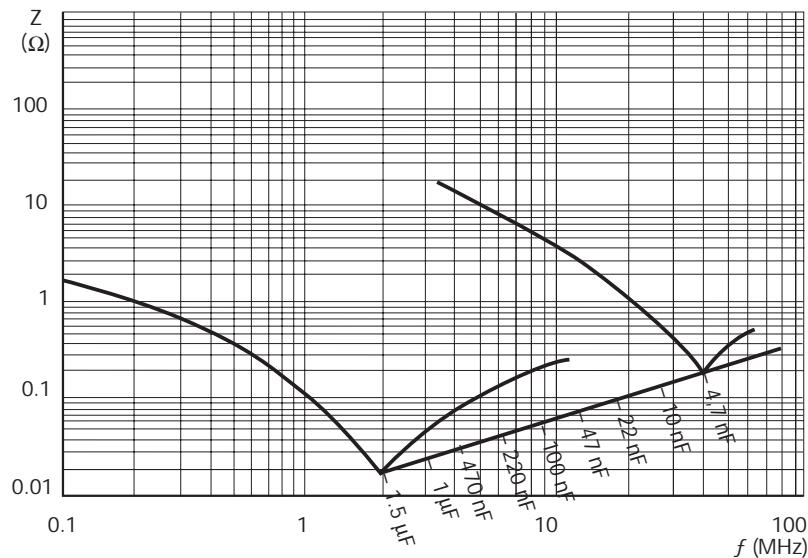

Nominal RMS voltage vs. frequency (room temperature) allowing a 10°C increase of the external temperature of the box.

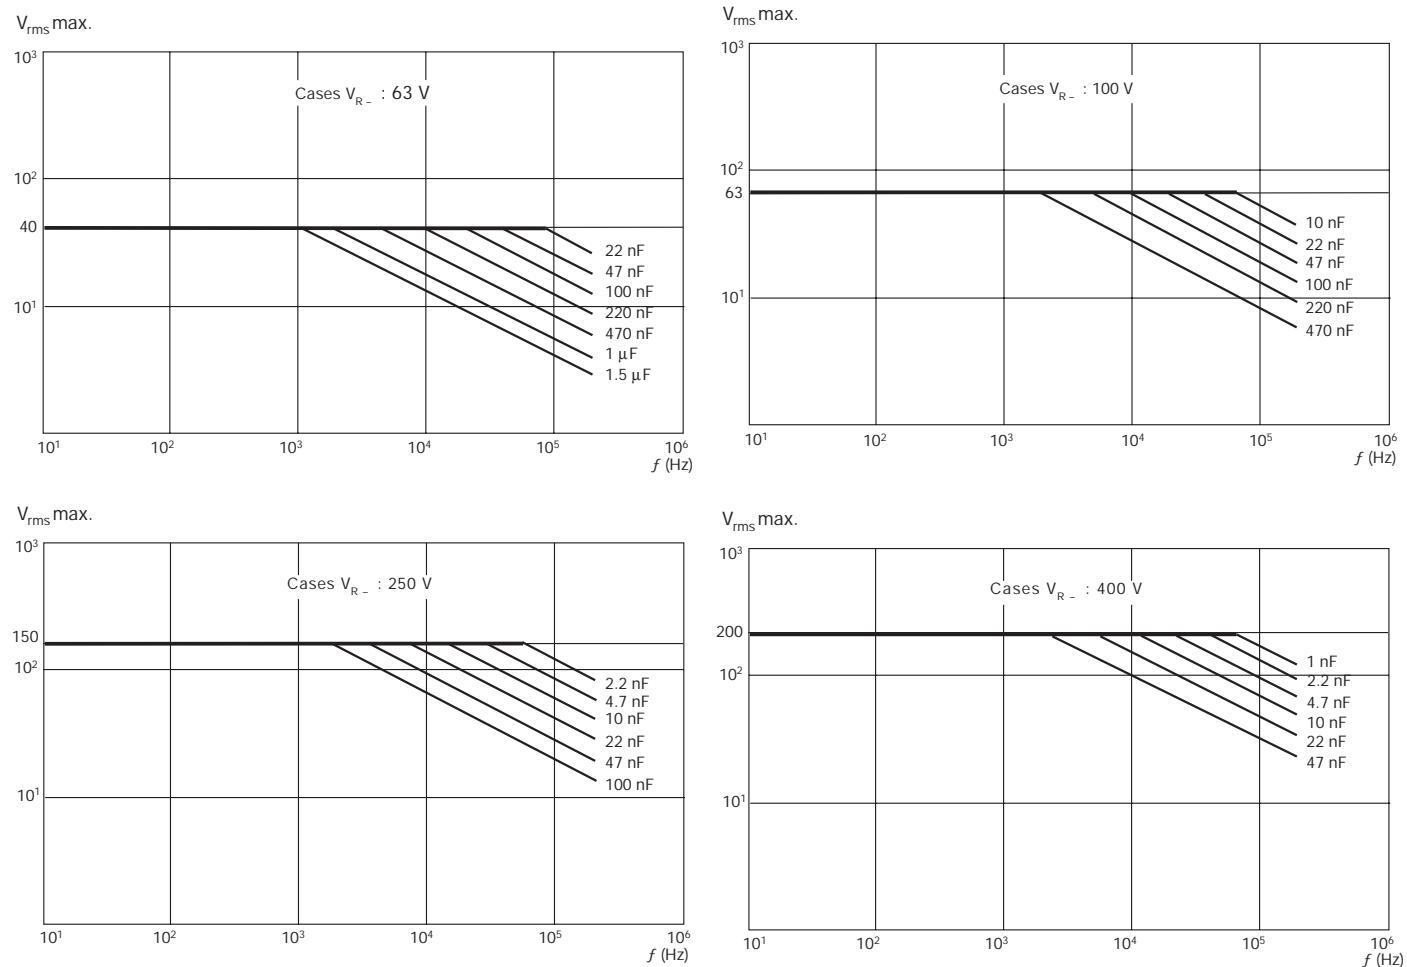


BF 01/02/05/06/07**BH 01/02/05/06/07****5.08 – Radial Leads — Taping on Reel for Automatic Insertion****CHARACTERISTICS OF THE REEL –**

Suffixes to be used (see page 7)

millimeters (inches)

	Taping Suffixes			
	DA	DB	DC	DD
H				19.5 ± 0.5 (0.768 ± 0.020)
REEL	–	PANASERT	–	AVISERT
AMMOPACK	PANASERT	–	AVISERT	–

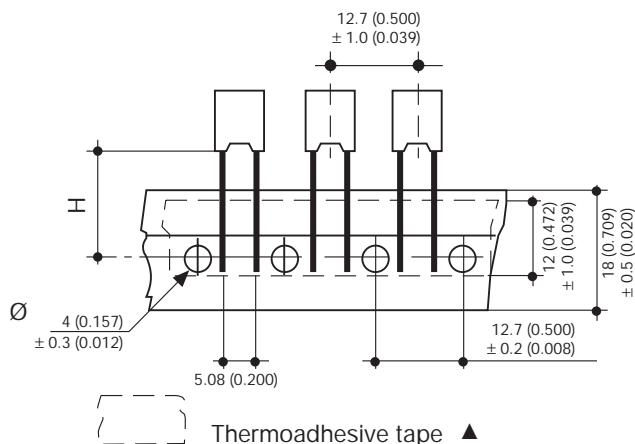
**PACKAGING**

Case	Quantity			USA Std.	Europe & Asia Std.
	Reel	Ammopack	Bulk		
01	2500	2500	1000	5000	
02	1800	2000	1000	3800	
05	900	1100	1000	1500	
06	900	1100	1000	1500	
07	1200	1250	1000	2500	

Case	E (ext.)
01	43 (1.693)
02/05/06/07	48 (1.929)

D
E

$\varnothing 31$ (1.220)

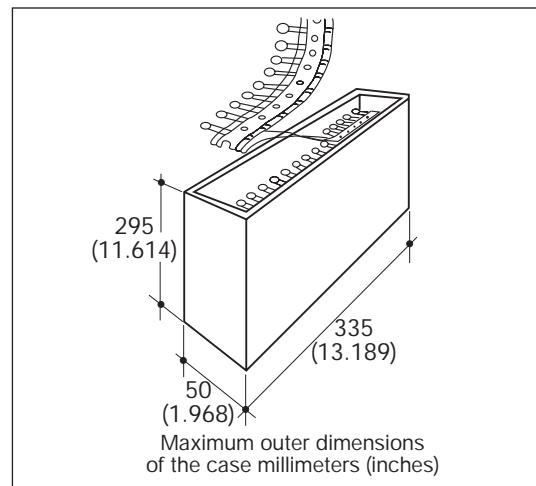

APPLICATIONS

Non-inductive, self-healing, metallized polyester film capacitor.
Insulated* thermoplastic casing, epoxy resin sealed with stand-offs*. Radial connections.

* Flame retardant resin and case according to UL 94 VO.

Some examples of use:

Supply decoupling, filter, integrators, treatment of analog signals, rejection of line perturbations, etc.

STANDARDIZATION

Generic specifications:

CEI 384-1/CECC 30000/UTE 83100



Sectional specifications:

CEI 384-2/CECC 30400/UTE 83151

On the LNZ list:

Complies with type CPM85 – CPM-R

Schematic Cross Section

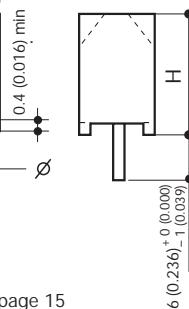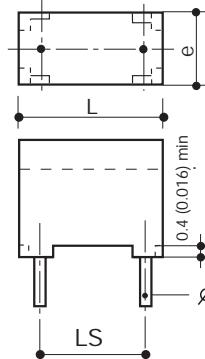

---- for case* in table page 15

millimeters (inches)

DIMENSIONS:

Size Code	L max.	H max.	e max.	LS ±0.4	$\varnothing^{+10\%}_{-0.05}$	Observations
07	9.25 ... 10.1 (0.364 ... 0.398)	8.0 ... 12.0 (0.315 ... 0.472)	3.25 ... 6.0 (0.128 ... 0.236)	7.5 (0.295)	0.6 (0.024)	1nF ≤ C _R ≤ 1μF
10	12.5 (0.492)	9.0 ... 13.5 (0.354 ... 0.531)	4.0 / 5.0 (0.157 / 0.197)	10.0 (0.394)	0.6 (0.024)	4.7nF ≤ C _R ≤ 470nF
15	17.5 (0.689)	10.5 ... 14.5 (0.413 ... 0.571)	5.0 ... 8.5 (0.197 ... 0.335)	15.0 (0.591)	0.8 (0.031)	33nF ≤ C _R ≤ 2.2μF
22	26.25 (1.033)	15.0 ... 19.5 (0.591 ... 0.768)	7.5 / 10.0 (0.295 / 0.394)	22.5 (0.886)	0.8 (0.031)	100nF ≤ C _R ≤ 6.8μF
27	31.25 (1.230)	19.5 ... 30.0 (0.768 ... 1.181)	10.0 ... 17.5 (0.394 ... 0.689)	27.5 (1.083)	0.8 (0.031)	330nF ≤ C _R ≤ 22μF

HOW TO ORDER

BT 10

4

G

0104

K

--

Tape and Reel
See page 27

PERFORMANCE CHARACTERISTICS

Climatic category:	55/100/56 - Performance Class 1
Capacitance range:	C _R 1 nF to 2.2 μF (E6)
Tolerances on C _R :	±5%, ±10%, ±20% (other values on request)
Nominal voltages:	V _R 63/100/160/250/400/630 V V _R 40/63/80/160/200/220 V
Category voltage:	V _C = 0.8 V _R at 100°C
Test voltage:	V _e = 1.6 V _R /2 s at 25°C
Tangent of loss angle:	D.F. (see page 4)
Insulation resistance:	IR (see page 5)
Max. voltage gradient: (dv/dt) _R	(see page 5)

Size	V _R -	dv/dt V/μs					
		63	100	160	250	400	630
07		35	50	—	72	150	300
10		18	28	30	45	90	180
15		12	15	20	30	55	100
22		4	5	—	9	12	20
27		3	4	6	7	10	15

MARKING

Logo

Tolerance (EIA code)

Nominal capacitance






DC nominal voltage

**NOMINAL VOLTAGE (V_R) AND CAPACITANCE VALUES (C_R)
DEPENDING ON THE DIMENSIONS**

Size	Case	DIMENSIONS: millimeters (inches)					Reference					
							BT					
		Max L	Max H	Max e	\emptyset +10% -0.05	LS ± 0.4	V_{R+}/V_{R-}					Range of Capacitance (C_R min. ... max.)
							63/40	100/63	160/80	250/160	400/200	630/220
07	1	9.25 (0.364)	8.0 (0.315)	3.25 (0.128)	0.6 (0.024)	7.5 (0.295)	68 nF ... 220 nF	22 nF ... 150 nF	-	6.8 nF ... 47 nF	1 nF ... 22 nF	1 nF ... 3.3 nF
	2	10.1 (0.398)	10.0 (0.394)	5.0 (0.197)	0.6 (0.024)		330 nF/470 nF	220 nF/330 nF	-	68 nF ... 100 nF	-	4.7 nF/6.8 nF
	C	10.1 (0.398)	11.0 (0.433)	5.0 (0.197)	0.6 (0.024)		680 nF	-	-	-	-	10 nF
	D	10.1 (0.398)	12.0 (0.472)	6.0 (0.236)	0.6 (0.024)		1 μF	-	-	150 nF	33 nF ... 47 nF	15 nF
10	EO	12.5 (0.492)	9.0 (0.354)	4.0 (0.157)	0.6 (0.024)	10.0 (0.394)	220 nF ... 470 nF	100 nF ... 220 nF	100 nF ... 220 nF	33 nF ... 100 nF	6.8 nF ... 33 nF	-
	4	12.5 (0.492)	10.0 (0.394)	5.0 (0.197)	0.6 (0.024)		-	-	-	-	47 nF	4.7 nF/22 nF
15	6	17.5 (0.689)	10.5 (0.413)	5.0 (0.197)	0.8 (0.031)	15.0 (0.591)	680 nF ... 1 μF	150 nF ... 1 μF	330 nF/470 nF	68 nF ... 220 nF	47 nF/68 nF	33 nF
	7	17.5 (0.689)	13.5 (0.531)	5.0 (0.197)	0.8 (0.031)		-	-	-	-	100 nF	-
	IO	17.5 (0.689)	12.0 (0.472)	6.0 (0.236)	0.8 (0.031)		2.2 μF	-	680 nF	330 nF	-	-
	8	17.5 (0.689)	13.5 (0.531)	6.25 (0.246)	0.8 (0.031)		-	-	1 μF	390 nF	150 nF	47 nF
	9	17.5 (0.689)	14.5 (0.571)	8.5 (0.335)	0.8 (0.031)		-	-	2.2 μF	-	-	68 nF
22	11	26.25 (1.033)	15.0 (0.591)	7.5 (0.295)	0.8 (0.031)	22.5 (0.886)	-	1.5 μF	-	470 nF/680 nF	220 nF	100 nF
	12	26.25 (1.033)	17.5 (0.689)	7.5 (0.295)	0.8 (0.031)		3.3 μF	2.2 μF	-	-	330 nF	150 nF
	13	26.25 (1.033)	19.5 (0.768)	10.0 (0.394)	0.8 (0.031)		4.7 μF/6.8 μF	3.3 μF	-	1 μF/1.5 μF	470 nF	220 nF
27	16	31.25 (1.230)	19.5 (0.768)	10.0 (0.394)	0.8 (0.031)	27.5 (1.083)	6.8 μF	4.7 μF	3.3 μF	1.5 μF	470 nF 680 nF	330 nF
	17*	31.25 (1.230)	22.5 (0.886)	12.5 (0.492)	0.8 (0.031)		10 μF	6.8 μF	-	2.2 μF	1 μF	470 nF
	18*	31.25 (1.230)	26.0 (1.024)	15.0 (0.591)	0.8 (0.031)		15 μF	10 μF	-	3.3 μF	1.5 μF	680 nF
	19*	31.25 (1.230)	30.0 (1.181)	17.5 (0.689)	0.8 (0.031)		22 μF	-	-	4.7 μF	2.2 μF	1 μF







CHARACTERISTIC CURVES

Influence of the frequency on the impedance (room temperature)

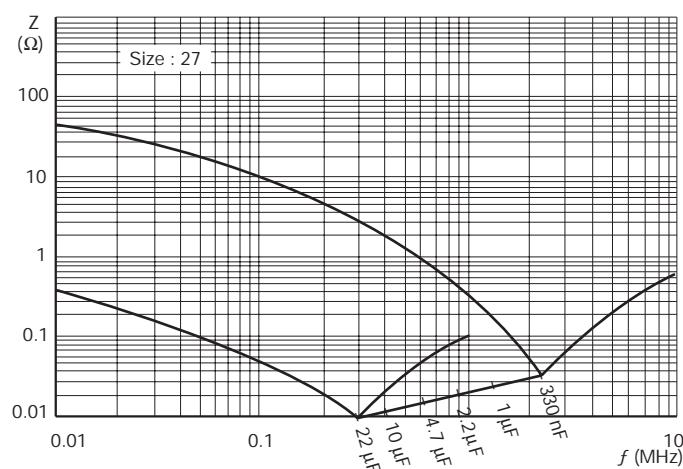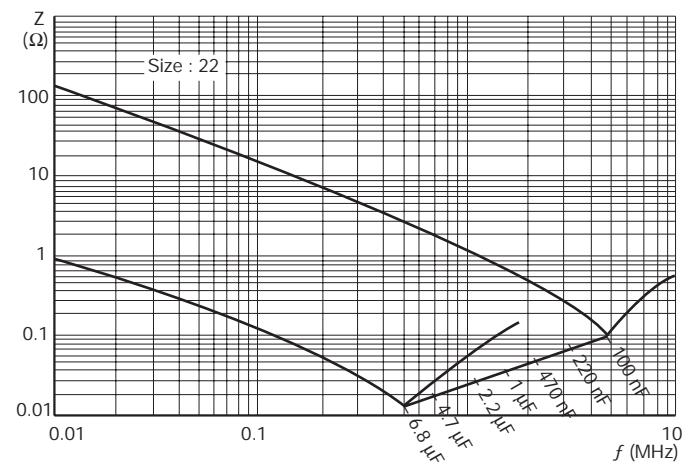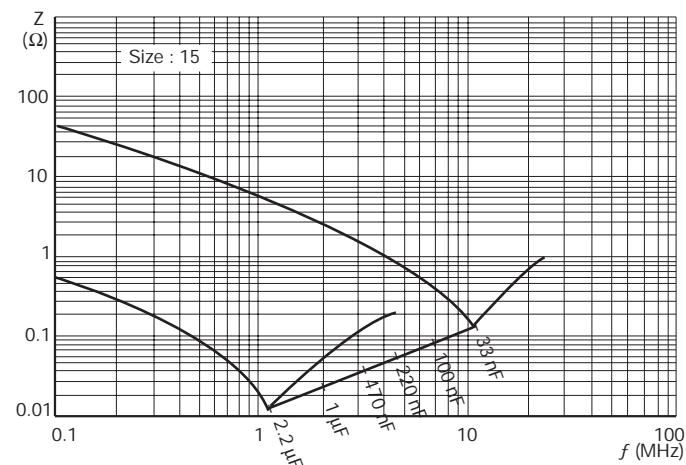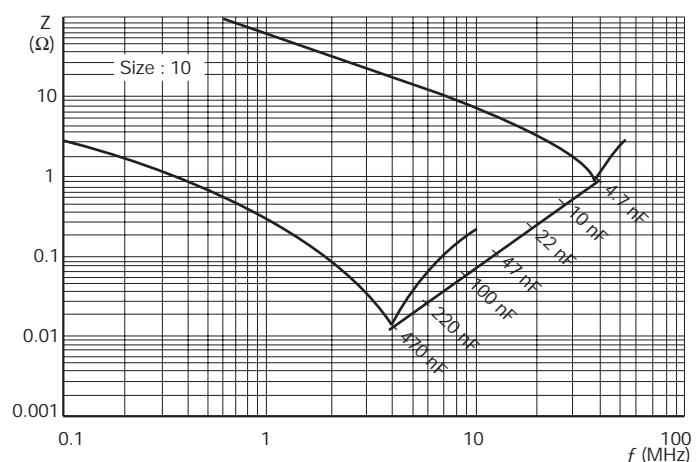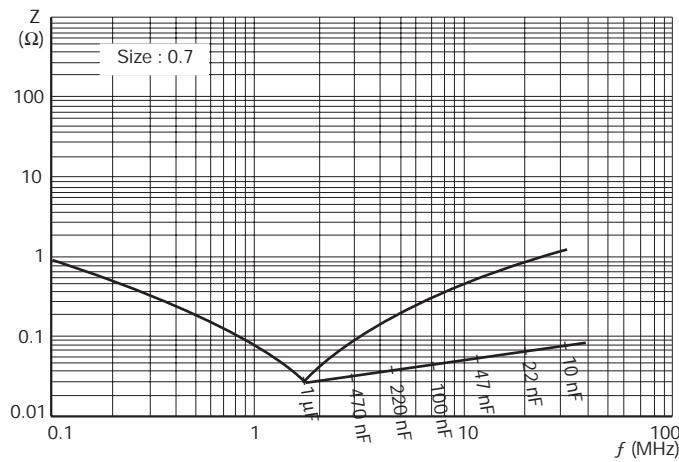

CHARACTERISTIC CURVES

Nominal RMS voltage vs. frequency (room temperature) allowing a 10°C increase of the external temperature of the box.

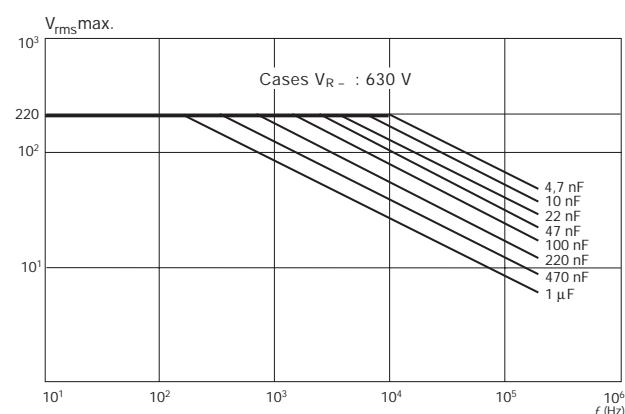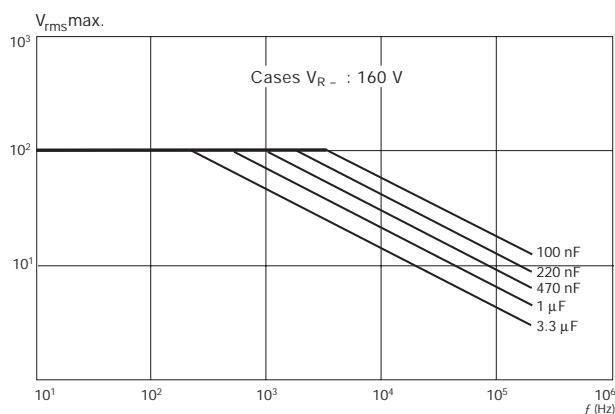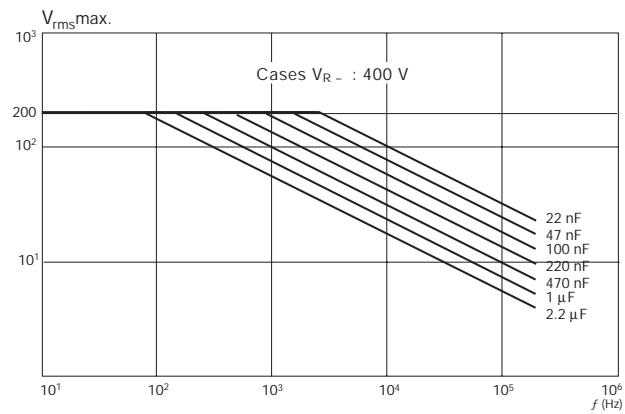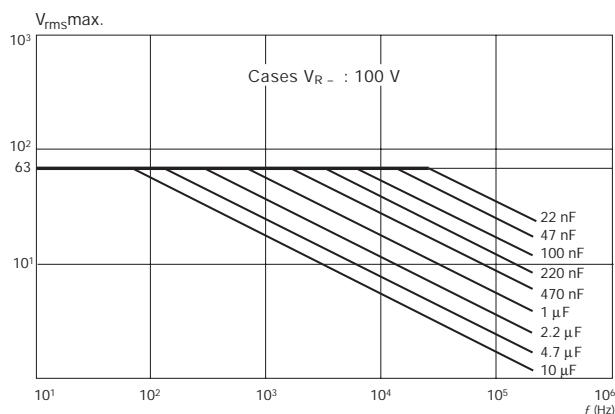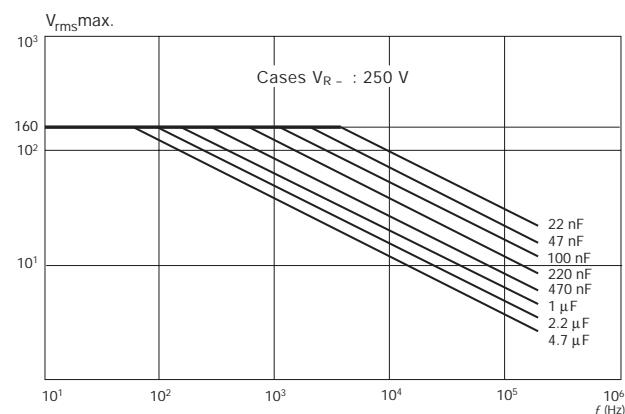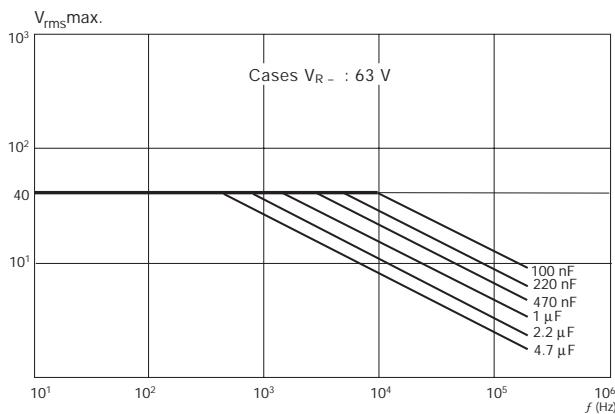

APPLICATIONS

Non-inductive, self-healing, metallized polyester film capacitor.
 Insulated* thermoplastic casing, epoxy resin sealed with stand-offs*. Radial connections.

* Flame retardant resin and case according to UL 94 VO .

Some examples of use:

Supply decoupling, filter, integrators, treatment of analog-signals, rejection of line perturbations, etc.

STANDARDIZATION

Generic specifications:

CEI 384-1/CECC 30000/UTE 83100

Sectional specifications:


CEI 384-2/CECC 30400/UTE 83151

On the LNZ list:

Complies with type CPM85 – CPM-R

MARKING

Logo -	Voltage
Capacitance	Tolerance

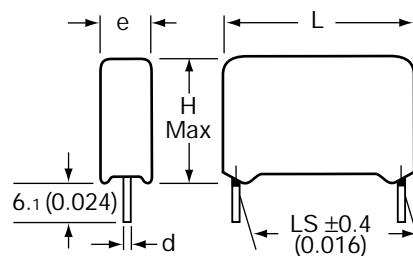

PERFORMANCE CHARACTERISTICS

Protection:	Plastic casing, epoxy resin sealed flame retardant case (UL 94 VO)
Temperature range:	-55°C to +100°C with voltage derating of 1.25%/°C between 85°C and 100°C
Climatic category:	55/100/55
Voltage range:	63 VDC to 1000 VDC
Capacitance range:	1 nF to 22 µF
Tolerances on C_R :	±5%, ±10%, ±20%
Test voltage:	1.6 Vn/2 s
Insulation resistance:	
Measurement condition:	
Temperature:	25°C ± 5°C
Duration:	1 minute
Measurement Voltage:	100 V for $V_n \geq 100$ V 50 V for $V_n < 100$ V

millimeters (inches)	
Lead Spacing (LS)	Diameter Ø
7.5 (0.295)	0.6 (0.024)
10 (0.394)	0.6 ⁽¹⁾ (0.024) / 0.8 (0.031)
> 10 (0.394)	0.8 (0.031)

(1): 0.6 (0.024) for capacitors with $e \leq 6$ (0.024)

Requirements:

For $U_n \leq 100$ V: $C \leq 0.33 \mu F \geq 15,000 M\Omega$
 $C > 0.33 \mu F \geq 5,000 S$

For $U_n > 100$ V: $C \leq 0.33 \mu F \geq 30,000 M\Omega$
 $C > 0.33 \mu F \geq 10,000 S$

Tangent of loss angle:

LIMIT VALUES

	$C \leq 0.1 \mu F$	$0.1 \mu F < C \leq 1 \mu F$	$C > 1 \mu F$
1 kHz	8×10^{-3}	8×10^{-3}	10×10^{-3}
10 kHz	15×10^{-3}	15×10^{-3}	
100 Hz	30×10^{-3}		

HOW TO ORDER

BG 10



Type

Pitch 10mm = 10
 Pitch 15mm = 15
 Pitch 22.5mm = 22
 Pitch 27.5mm = 27

4



Class

G



Voltage

0104



Capacitance Value

K



Tolerance


--



Suffix


Range

millimeters (inches)

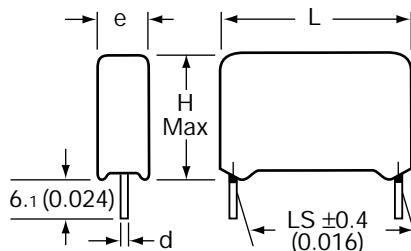

Capacitance	63 V DC / 40 V AC				100 V DC / 63 V AC				250 V DC / 160 V AC			
	e	H	L	LS	e	H	L	LS	e	H	L	LS
0.01 µF												
0.01 µF									2.5 (0.098)	7.5 (0.295)	10.0 (0.394)	7.5 (0.295)
0.015 µF												
0.015 µF									2.5 (0.098)	7.5 (0.295)	10.0 (0.394)	7.5 (0.295)
0.022 µF												
0.022 µF					2.5 (0.098)	7.0 (0.276)	10.0 (0.394)	7.5 (0.295)	3.0 (0.118)	8.6 (0.339)	10.0 (0.394)	7.5 (0.295)
0.033 µF									4.0 (0.157)	9.0 (0.354)	10.0 (0.394)	7.5 (0.295)
0.033 µF					3.0 (0.118)	8.6 (0.339)	10.0 (0.394)	7.5 (0.295)	4.0 (0.157)	9.0 (0.354)	13.0 (0.512)	10.0 (0.394)
0.047 µF												
0.047 µF									4.0 (0.157)	9.0 (0.354)	10.0 (0.394)	7.5 (0.295)
0.047 µF					3.0 (0.118)	8.6 (0.339)	10.0 (0.394)	7.5 (0.295)	9.0 (0.354)	9.0 (0.354)	13.0 (0.512)	10.0 (0.394)
0.068 µF												
0.068 µF					3.0 (0.118)	8.6 (0.339)	10.0 (0.394)	7.5 (0.295)	5.0 (0.197)	11.0 (0.433)	10.0 (0.394)	7.5 (0.295)
0.068 µF					4.0 (0.157)	9.0 (0.354)	13.0 (0.512)	10.0 (0.394)	4.0 (0.157)	9.0 (0.354)	13.0 (0.512)	10.0 (0.394)
0.1 µF									5.0 (0.197)	11.0 (0.433)	10.0 (0.394)	7.5 (0.295)
0.1 µF					4.0 (0.157)	9.0 (0.354)	10.0 (0.394)	7.5 (0.295)	4.0 (0.157)	9.0 (0.354)	13.0 (0.512)	10.0 (0.394)
0.15 µF									5.5 (0.216)	10.5 (0.413)	18.0 (0.709)	15.0 (0.591)
0.15 µF					4.0 (0.157)	9.0 (0.354)	10.0 (0.394)	7.5 (0.295)	4.0 (0.157)	9.0 (0.354)	13.0 (0.512)	10.0 (0.394)
0.15 µF	2.5 (0.098)	7.0 (0.276)	10.0 (0.394)	7.5 (0.295)	4.0 (0.157)	9.0 (0.354)	13.0 (0.512)	10.0 (0.394)	5.5 (0.216)	10.5 (0.413)	18.0 (0.709)	15.0 (0.591)
0.22 µF												
0.22 µF					5.0 (0.197)	11.0 (0.433)	10.0 (0.394)	7.5 (0.295)	5.0 (0.197)	11.0 (0.433)	13.0 (0.512)	10.0 (0.394)
0.22 µF	4.0 (0.157)	9.0 (0.354)	10.0 (0.394)	7.5 (0.295)	4.0 (0.157)	9.0 (0.354)	13.0 (0.512)	10.0 (0.394)	5.5 (0.216)	10.5 (0.413)	18.0 (0.709)	15.0 (0.591)
0.33 µF					5.0 (0.197)	11.0 (0.433)	10.0 (0.394)	7.5 (0.295)				
0.33 µF	4.0 (0.157)	9.0 (0.354)	10.0 (0.394)	7.5 (0.295)	5.0 (0.197)	11.0 (0.433)	13.0 (0.512)	10.0 (0.394)	6.0 (0.236)	12.0 (0.472)	10.4 (0.409)	7.5 (0.295)
0.33 µF	4.0 (0.157)	9.0 (0.354)	13.0 (0.512)	10.0 (0.394)	5.5 (0.216)	10.5 (0.413)	18.0 (0.709)	15.0 (0.591)	5.5 (0.216)	10.5 (0.413)	18.0 (0.709)	15.0 (0.591)
0.47 µF									6.0 (0.236)	12.0 (0.472)	10.4 (0.409)	7.5 (0.295)
0.47 µF	5.0 (0.197)	11.0 (0.433)	10.0 (0.394)	7.5 (0.295)	5.0 (0.197)	11.0 (0.433)	13.0 (0.512)	10.0 (0.394)	5.5 (0.216)	11.0 (0.433)	13.0 (0.512)	10.0 (0.394)
0.47 µF	4.0 (0.157)	9.0 (0.354)	13.0 (0.512)	10.0 (0.394)	5.5 (0.216)	10.5 (0.413)	18.0 (0.709)	15.0 (0.591)	5.5 (0.216)	10.5 (0.413)	18.0 (0.709)	15.0 (0.591)
0.68 µF					6.0 (0.236)	12.0 (0.472)	10.4 (0.409)	7.5 (0.295)				
0.68 µF	5.0 (0.197)	11.0 (0.433)	10.0 (0.394)	7.5 (0.295)	6.0 (0.236)	12.0 (0.472)	10.4 (0.409)	7.5 (0.295)	5.5 (0.216)	10.5 (0.413)	18.0 (0.709)	15.0 (0.591)
0.68 µF	5.0 (0.197)	11.0 (0.433)	13.0 (0.512)	10.0 (0.394)	6.0 (0.236)	11.0 (0.433)	13.0 (0.512)	10.0 (0.394)	5.5 (0.216)	10.5 (0.413)	18.0 (0.709)	15.0 (0.591)
0.68 µF	5.5 (0.216)	10.5 (0.413)	18.0 (0.709)	15.0 (0.591)	5.5 (0.216)	10.5 (0.413)	18.0 (0.709)	15.0 (0.591)	7.0 (0.276)	15.0 (0.591)	25.5 (1.004)	22.5 (0.886)
1 µF					6.0 (0.236)	12.0 (0.472)	10.4 (0.409)	7.5 (0.295)				
1 µF	6.0 (0.236)	12.0 (0.472)	10.4 (0.409)	7.5 (0.295)	6.0 (0.236)	11.0 (0.433)	13.0 (0.512)	10.0 (0.394)	7.0 (0.276)	15.0 (0.591)	18.0 (0.709)	15.0 (0.591)
1 µF	5.0 (0.197)	11.0 (0.433)	13.0 (0.512)	10.0 (0.394)	6.0 (0.236)	11.0 (0.433)	13.0 (0.512)	10.0 (0.394)	7.0 (0.276)	15.0 (0.591)	25.5 (1.004)	22.5 (0.886)
1 µF	5.5 (0.216)	10.5 (0.413)	18.0 (0.709)	15.0 (0.591)	5.5 (0.216)	10.5 (0.413)	18.0 (0.709)	15.0 (0.591)	7.0 (0.276)	15.0 (0.591)	25.5 (1.004)	22.5 (0.886)
1.5 µF					7.0 (0.276)	12.5 (0.492)	18.0 (0.709)	15.0 (0.591)				
1.5 µF	6.0 (0.236)	11.0 (0.433)	13.0 (0.512)	10.0 (0.394)	7.0 (0.276)	12.5 (0.492)	18.0 (0.709)	15.0 (0.591)	8.5 (0.335)	16.5 (0.650)	25.5 (1.004)	22.5 (0.886)
1.5 µF	5.5 (0.216)	10.5 (0.413)	18.0 (0.709)	15.0 (0.591)	7.0 (0.276)	15.0 (0.591)	25.5 (1.004)	22.5 (0.886)	11.0 (0.433)	20.0 (0.787)	32.0 (1.260)	27.5 (1.083)
2.2 µF					7.0 (0.276)	14.0 (0.551)	13.0 (0.512)	10.0 (0.394)				
2.2 µF	7.0 (0.276)	14.0 (0.551)	13.0 (0.512)	10.0 (0.394)	7.0 (0.276)	12.5 (0.492)	18.0 (0.709)	15.0 (0.591)	10.5 (0.413)	19.5 (0.768)	25.5 (1.004)	22.5 (0.886)
2.2 µF	7.0 (0.276)	12.5 (0.492)	18.0 (0.709)	15.0 (0.591)	7.0 (0.276)	15.0 (0.591)	25.5 (1.004)	22.5 (0.886)	11.0 (0.433)	20.0 (0.787)	32.0 (1.260)	27.5 (1.083)
3.3 µF					7.0 (0.276)	12.5 (0.492)	18.0 (0.709)	15.0 (0.591)	9.0 (0.354)	14.5 (0.571)	18.0 (0.709)	15.0 (0.591)
3.3 µF	7.0 (0.276)	12.5 (0.492)	18.0 (0.709)	15.0 (0.591)	9.0 (0.354)	14.5 (0.571)	18.0 (0.709)	15.0 (0.591)	9.0 (0.354)	14.5 (0.571)	18.0 (0.709)	15.0 (0.591)
3.3 µF	7.0 (0.276)	15.0 (0.591)	25.5 (1.004)	22.5 (0.886)	8.5 (0.335)	16.5 (0.650)	25.5 (1.004)	22.5 (0.886)	11.0 (0.433)	20.0 (0.787)	32.0 (1.260)	27.5 (1.083)
4.7 µF					9.0 (0.354)	14.5 (0.571)	18.0 (0.709)	15.0 (0.591)	8.5 (0.335)	16.5 (0.650)	25.5 (1.004)	22.5 (0.886)
4.7 µF	8.5 (0.335)	16.5 (0.650)	25.5 (1.004)	22.5 (0.886)	11.0 (0.433)	20.0 (0.787)	32.0 (1.260)	27.5 (1.083)	14.0 (0.551)	25.0 (0.984)	32.0 (1.260)	27.5 (1.083)
6.8 µF									10.5 (0.413)	19.5 (0.768)	25.5 (1.004)	22.5 (0.886)
6.8 µF	8.5 (0.335)	16.5 (0.650)	25.5 (1.004)	22.5 (0.886)	11.0 (0.433)	20.0 (0.787)	32.0 (1.260)	27.5 (1.083)				
10 µF	10.5 (0.413)	19.5 (0.768)	25.5 (1.004)	22.5 (0.886)								
10 µF	11.0 (0.433)	20.0 (0.787)	32.0 (1.260)	27.5 (1.083)	11.0 (0.433)	20.0 (0.787)	32.0 (1.260)	27.5 (1.083)				
15 µF												
15 µF	14.0 (0.551)	25.0 (0.984)	32.0 (1.260)	27.5 (1.083)								
22 µF												
22 µF	14.0 (0.551)	25.0 (0.984)	32.0 (1.260)	27.5 (1.083)								

Range

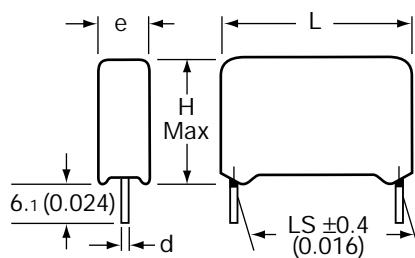


millimeters (inches)



Capacitance	400 V DC / 200 V AC				630 V DC / 220 V AC				1000 V DC / 250 V AC			
	e	H	L	LS	e	H	L	LS	e	H	L	LS
1 nF					2.5 (0.098)	7.0 (0.276)	10.0 (0.394)	7.5 (0.295)	4.0 (0.157)	9.0 (0.354)	13.0 (0.512)	10.0 (0.394)
1.5 nF					2.5 (0.098)	7.0 (0.276)	10.0 (0.394)	7.5 (0.295)	4.0 (0.157)	9.0 (0.354)	13.0 (0.512)	10.0 (0.394)
1.5 nF					2.5 (0.098)	7.0 (0.276)	10.0 (0.394)	7.5 (0.295)	4.0 (0.157)	9.0 (0.354)	13.0 (0.512)	10.0 (0.394)
2.2 nF					3.0 (0.118)	8.6 (0.339)	10.0 (0.394)	7.5 (0.295)	4.0 (0.157)	9.0 (0.354)	13.0 (0.512)	10.0 (0.394)
2.2 nF					3.0 (0.118)	8.6 (0.339)	10.0 (0.394)	7.5 (0.295)	4.0 (0.157)	9.0 (0.354)	13.0 (0.512)	10.0 (0.394)
3.3 nF					3.0 (0.118)	8.6 (0.339)	10.0 (0.394)	7.5 (0.295)	4.0 (0.157)	9.0 (0.354)	13.0 (0.512)	10.0 (0.394)
3.3 nF					3.0 (0.118)	8.6 (0.339)	10.0 (0.394)	7.5 (0.295)	4.0 (0.157)	9.0 (0.354)	13.0 (0.512)	10.0 (0.394)
4.7 nF					4.0 (0.157)	9.0 (0.354)	10.0 (0.394)	7.5 (0.295)	4.0 (0.157)	9.0 (0.354)	13.0 (0.512)	10.0 (0.394)
4.7 nF	2.5 (0.098)	7.0 (0.276)	10.0 (0.394)	7.5 (0.295)	4.0 (0.157)	9.0 (0.354)	13.0 (0.512)	10.0 (0.394)	4.0 (0.157)	9.0 (0.354)	13.0 (0.512)	10.0 (0.394)
6.8 nF					4.0 (0.157)	9.0 (0.354)	10.0 (0.394)	7.5 (0.295)	4.0 (0.157)	9.0 (0.354)	13.0 (0.512)	10.0 (0.394)
6.8 nF	3.0 (0.118)	8.6 (0.339)	10.0 (0.394)	7.5 (0.295)	4.0 (0.157)	9.0 (0.354)	13.0 (0.512)	10.0 (0.394)	6.0 (0.236)	11.0 (0.433)	13.0 (0.512)	10.0 (0.394)
0.01 μ F					5.0 (0.197)	11.0 (0.433)	10.0 (0.394)	7.5 (0.295)	5.0 (0.197)	11.0 (0.433)	10.0 (0.394)	7.5 (0.295)
0.01 μ F	4.0 (0.157)	9.0 (0.354)	10.0 (0.394)	7.5 (0.295)	4.0 (0.157)	9.0 (0.354)	13.0 (0.512)	10.0 (0.394)	5.5 (0.216)	10.5 (0.413)	18.0 (0.709)	15.0 (0.591)
0.015 μ F	4.0 (0.157)	9.0 (0.354)	10.0 (0.394)	7.5 (0.295)	6.0 (0.236)	12.0 (0.472)	10.4 (0.409)	7.5 (0.295)				
0.015 μ F	4.0 (0.157)	9.0 (0.354)	13.0 (0.512)	10.0 (0.394)	5.0 (0.197)	11.0 (0.433)	13.0 (0.512)	10.0 (0.394)	5.5 (0.216)	10.5 (0.413)	18.0 (0.709)	15.0 (0.591)
0.022 μ F	5.0 (0.197)	11.0 (0.433)	10.0 (0.394)	7.5 (0.295)								
0.022 μ F	4.0 (0.157)	9.0 (0.354)	13.0 (0.512)	10.0 (0.394)	5.0 (0.197)	11.0 (0.433)	13.0 (0.512)	10.0 (0.394)	7.0 (0.276)	12.5 (0.492)	18.0 (0.709)	15.0 (0.591)
0.033 μ F	5.0 (0.197)	11.0 (0.433)	10.0 (0.394)	7.5 (0.295)	6.0 (0.236)	11.0 (0.433)	13.0 (0.512)	10.0 (0.394)				
0.033 μ F	4.0 (0.157)	9.0 (0.354)	13.0 (0.512)	10.0 (0.394)	5.5 (0.216)	10.5 (0.413)	18.0 (0.709)	15.0 (0.591)	7.0 (0.276)	15.0 (0.591)	25.5 (1.004)	22.5 (0.886)
0.047 μ F	6.0 (0.236)	12.0 (0.472)	10.4 (0.409)	7.5 (0.295)								
0.047 μ F	4.0 (0.157)	9.0 (0.354)	13.0 (0.512)	10.0 (0.394)	6.0 (0.236)	11.0 (0.433)	13.0 (0.512)	10.0 (0.394)				
0.047 μ F	5.5 (0.216)	10.5 (0.413)	18.0 (0.709)	15.0 (0.591)	5.5 (0.216)	10.5 (0.413)	18.0 (0.709)	15.0 (0.591)	7.0 (0.276)	15.0 (0.591)	25.5 (1.004)	22.5 (0.886)
0.068 μ F	6.0 (0.236)	12.0 (0.472)	10.4 (0.409)	7.5 (0.295)								
0.068 μ F	5.0 (0.197)	11.0 (0.433)	13.0 (0.512)	10.0 (0.394)	7.0 (0.276)	14.0 (0.551)	13.0 (0.512)	10.0 (0.394)				
0.068 μ F	5.5 (0.216)	10.5 (0.413)	18.0 (0.709)	15.0 (0.591)	5.5 (0.216)	10.5 (0.413)	18.0 (0.709)	15.0 (0.591)	7.0 (0.276)	15.0 (0.591)	25.5 (1.004)	22.5 (0.886)
0.1 μ F												
0.1 μ F	6.0 (0.236)	11.0 (0.433)	13.0 (0.512)	10.0 (0.394)	7.0 (0.276)	12.5 (0.492)	18.0 (0.709)	15.0 (0.591)				
0.1 μ F	5.5 (0.216)	10.5 (0.413)	18.0 (0.709)	15.0 (0.591)	7.0 (0.276)	15.0 (0.591)	25.5 (1.004)	22.5 (0.886)	8.5 (0.335)	16.5 (0.650)	25.5 (1.004)	22.5 (0.886)
0.15 μ F												
0.15 μ F	7.0 (0.276)	14.0 (0.551)	13.0 (0.512)	10.0 (0.394)	9.0 (0.354)	14.5 (0.571)	18.0 (0.709)	15.0 (0.591)				
0.15 μ F	5.5 (0.216)	10.5 (0.413)	18.0 (0.709)	15.0 (0.591)	7.0 (0.276)	15.0 (0.591)	25.5 (1.004)	22.5 (0.886)	11.0 (0.433)	20.0 (0.787)	32.0 (1.260)	27.5 (1.083)
0.22 μ F												
0.22 μ F	5.5 (0.216)	10.5 (0.413)	18.0 (0.709)	15.0 (0.591)	9.0 (0.354)	14.5 (0.571)	18.0 (0.709)	15.0 (0.591)				
0.22 μ F	7.0 (0.276)	15.0 (0.591)	25.5 (1.004)	22.5 (0.886)	7.0 (0.276)	15.0 (0.591)	25.5 (1.004)	22.5 (0.886)	11.0 (0.433)	20.0 (0.787)	32.0 (1.260)	27.5 (1.083)
0.33 μ F												
0.33 μ F	7.0 (0.276)	12.5 (0.492)	18.0 (0.709)	15.0 (0.591)	10.5 (0.413)	19.5 (0.768)	25.5 (1.004)	22.5 (0.886)				
0.33 μ F	7.0 (0.276)	15.0 (0.591)	25.5 (1.004)	22.5 (0.886)	11.0 (0.433)	20.0 (0.787)	32.0 (1.260)	27.5 (1.083)	14.0 (0.551)	25.0 (0.984)	32.0 (1.260)	27.5 (1.083)
0.47 μ F												
0.47 μ F	9.0 (0.354)	14.5 (0.571)	18.0 (0.709)	15.0 (0.591)								
0.47 μ F	7.0 (0.276)	15.0 (0.591)	25.5 (1.004)	22.5 (0.886)	11.0 (0.433)	20.0 (0.787)	32.0 (1.260)	27.5 (1.083)	14.0 (0.551)	25.0 (0.984)	32.0 (1.260)	27.5 (1.083)
0.68 μ F												
0.68 μ F	7.0 (0.276)	15.0 (0.591)	25.5 (1.004)	22.5 (0.886)								
0.68 μ F	11.0 (0.433)	20.0 (0.787)	32.0 (1.260)	27.5 (1.083)	14.0 (0.551)	25.0 (0.984)	32.0 (1.260)	27.5 (1.083)				
1 μ F												
1 μ F	7.0 (0.276)	15.0 (0.591)	25.5 (1.004)	22.5 (0.886)								
1 μ F	11.0 (0.433)	20.0 (0.787)	32.0 (1.260)	27.5 (1.083)	14.0 (0.551)	25.0 (0.984)	32.0 (1.260)	27.5 (1.083)				
1.5 μ F	10.5 (0.413)	19.5 (0.768)	25.5 (1.004)	22.5 (0.886)								
1.5 μ F	11.0 (0.433)	20.0 (0.787)	32.0 (1.260)	27.5 (1.083)								
2.2 μ F												
2.2 μ F	14.0 (0.551)	25.0 (0.984)	32.0 (1.260)	27.5 (1.083)								

Packaging

LS = 7.5 (0.295)

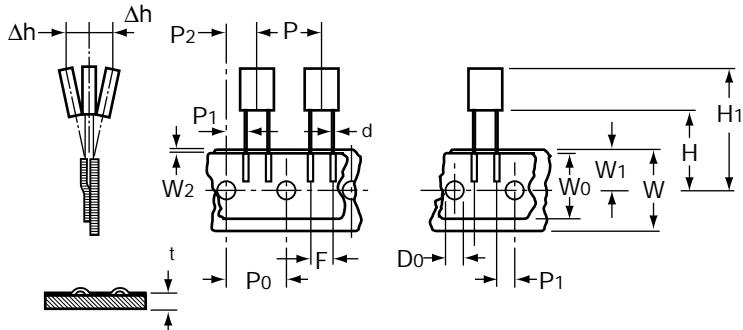

LS = 10 (0.413) / 15 (0.591)

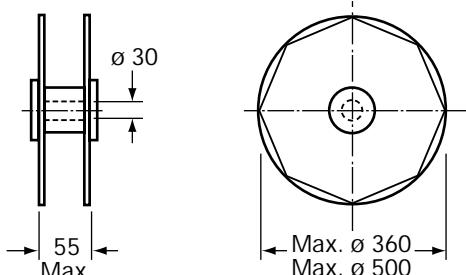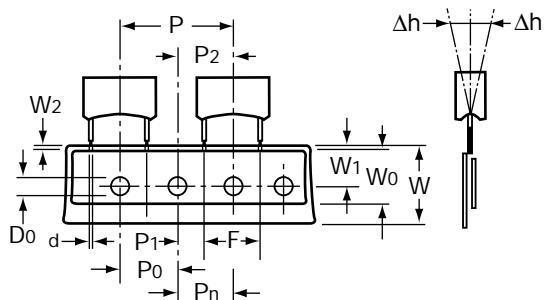

LS = 7.5 (0.295)
LS = 10 (0.394) or 15 (0.591)

Symbol	Dimensions				Note
	P=7.5 (0.295)	P=10 (0.394)	P=15 (0.591)	Tol	
d	0.6 (0.024)	0.6 (0.024)	0.8 (0.031)	±0.05	
P ₁	2.6 (0.103)	7.7 (0.303)	5.2 (0.205)	±0.7	
P ₂	6.35 (0.250)	12.7 (0.500)	12.7 (0.500)	±1	
F	7.5 (0.295)	10 (0.000)	15 (0.000)	±0.6 -0.1	
P	12.7 (0.500)	25.4 (1.000)	25.4 (1.000)	±1	
P ₀	12.7 (0.500)	12.7 (0.500)	12.7 (0.500)	±0.2	
A _h	0 (0.000)	0 (0.000)	0 (0.000)	±0.2	
W	18 (0.709)	18 (0.709)	18 (0.709)	±0.5	
W ₀	15 (0.591)	15 (0.591)	15 (0.591)		Max.
W ₁	9 (0.354)	9 (0.354)	9 (0.354)	±0.5	
W ₂	0.5 ³ (0.020)	0.5 ³ (0.020)	0.5 ³ (0.020)		
H	16.5 (0.650)	16.0 (0.630)	16.0 (0.630)	±0.3	
	18.5 (0.728)	18.5 (0.728)	18.5 (0.728)	±0.5	
H ₁	32 (1.260)	32 (1.260)	32 (1.260)		Max.
D ₀	4 (0.157)	4 (0.157)	4 (0.157)	±0.2	

LS	Dimensions	Primary Qty.	Minimum Qty. Order
7.5 (0.295)	2.5 x 7 x 10 (0.098 x 0.276 x 0.394)	2500	2500
	3 x 8 x 10 (0.118 x 0.315 x 0.394)	2500	2500
	4 x 9 x 10 (0.157 x 0.354 x 0.394)	2500	2500
	5 x 11 x 10 (0.197 x 0.433 x 0.394)	2000	2000
	6 x 12 x 10 (0.236 x 0.472 x 0.394)	1200	1200
10 (0.394)	4 x 9 x 13 (0.157 x 0.354 x 0.512)	2200	2200
	5 x 11 x 13 (0.197 x 0.433 x 0.512)	1500	1500
	6 x 11 x 13 (0.236 x 0.433 x 0.512)	1200	1200
	7 x 14 x 13 (0.276 x 0.551 x 0.512)	800	800
15 (0.591)	5.5 x 10.5 x 18 (0.216 x 0.413 x 0.709)	1700	1700
	9 x 14.5 x 18 (0.354 x 0.571 x 0.709)	1200	1200
	7 x 12.5 x 18 (0.276 x 0.492 x 0.709)	800	800
22.5 (0.886)	7 x 15 x 25.5 (0.276 x 0.591 x 1.004)	700	700
	8.5 x 16.5 x 25.5 (0.335 x 0.650 x 1.004)	500	500
	10 x 19.5 x 25.5 (0.394 x 0.768 x 1.004)	350	350
27.5 (1.083)	11 x 20 x 32 (0.433 x 0.787 x 1.260)	300	6000
	14 x 25 x 32 (0.551 x 0.984 x 1.260)	200	6000

millimeters (inches)

LS	e	Quantity per reel
7.5 (0.295)	e = 2.5 (0.098)	2500
	e = 3 (0.118)	2000
	e = 4 (0.157)	1500
	e = 5 (0.197)	1200
	e = 6 (0.236)	1000
10 (0.394)	e = 4 (0.157)	1500
	e = 5 (0.197)	1300
	e = 6 (0.236)	1000
	e = 7 (0.276)	900
15 (0.591)	e = 5.5 (0.216)	1100
	e = 7 (0.276)	900
	e = 9 (0.354)	600

15 Radial Leads — 250 V-

APPLICATIONS

Non-inductive, self-healing, metallized polyester film capacitor. Insulated* thermoplastic casing, epoxy resin sealed with stand-offs*. Radial connections.

* Flame retardant resin and case according to UL 94 VO.

Some examples of use:

Telecom applications, linking function in the ringing circuit.

STANDARDIZATION


Generic specifications:

CEI 384-1/CECC 30000/UTE 83100

Sectional specifications:

CEI 384-2/CECC 30400/UTE 83151

Schematic Cross Section

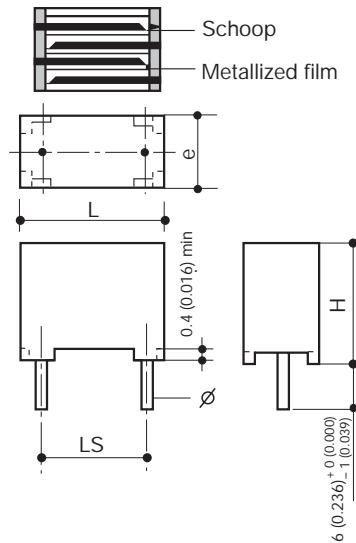

DIMENSIONS:

millimeters (inches)

Type	Case	C_R (μF)	L max	h max	e max	LS ± 0.4	\emptyset +10% -0.05
BC 15	i0	0.47	17.5 (0.689)	12.0 (0.472)	6.0 (0.236)	15.0 (0.591)	0.8 (0.031)
	8	0.68	17.5 (0.689)	13.5 (0.531)	6.25 (0.246)	15.0 (0.591)	0.8 (0.031)
	9	0.80	17.5 (0.689)	14.5 (0.571)	8.5 (0.335)	15.0 (0.591)	0.8 (0.031)
	9	0.82	17.5 (0.689)	14.5 (0.571)	8.5 (0.335)	15.0 (0.591)	0.8 (0.031)
	9	1.0	17.5 (0.689)	14.5 (0.571)	8.5 (0.335)	15.0 (0.591)	0.8 (0.031)
	9	1.5	17.5 (0.689)	14.5 (0.571)	8.5 (0.335)	15.0 (0.591)	0.8 (0.031)
	9	2.2	17.5 (0.689)	14.5 (0.571)	8.5 (0.335)	15.0 (0.591)	0.8 (0.031)
BD 15	8	0.80	17.5 (0.689)	13.5 (0.531)	6.25 (0.246)	15.0 (0.591)	0.8 (0.031)
	8	0.82	17.5 (0.689)	13.5 (0.531)	6.25 (0.246)	15.0 (0.591)	0.8 (0.031)
	8	1.0	17.5 (0.689)	13.5 (0.531)	6.25 (0.246)	15.0 (0.591)	0.8 (0.031)

HOW TO ORDER

BC 15
—
Type

4
—
Class

G
—
Voltage

0105
—
Capacitance Value

K
—
Tolerance

--
—
Suffix
Tape and Reel
See page 27

PERFORMANCE CHARACTERISTICS

Climatic category:	55/100/56
Capacitance (C_R):	See table
Tolerance:	$\pm 5\%$, $\pm 10\%$
Nominal voltage (V_R):	250 V
Test voltage (1.4 V_R):	350 V
Category voltage (V_C at 100°C):	0.75 V_R
Tangent of loss angle at 1 kHz (D.F.):	$\leq 80 \cdot 10^{-4}$
Insulation resistance between terminals (IR under 100 V-):	$I_R \cdot C_R \geq 10 \text{ G}\Omega \mu\text{F}$
Insulation resistance between terminals and case:	$\geq 30 \text{ G}\Omega$
Voltage gradient (max. dv/dt peak):	30 V/ μs


MARKING

BC 1μ0 K
250 V-

Logo
Nominal capacitance
Tolerance (EIA code)
DC nominal voltage

CHARACTERISTIC CURVES

Nominal RMS voltage vs. frequency (room temperature) allowing a 10°C increase of the external temperature of the box.

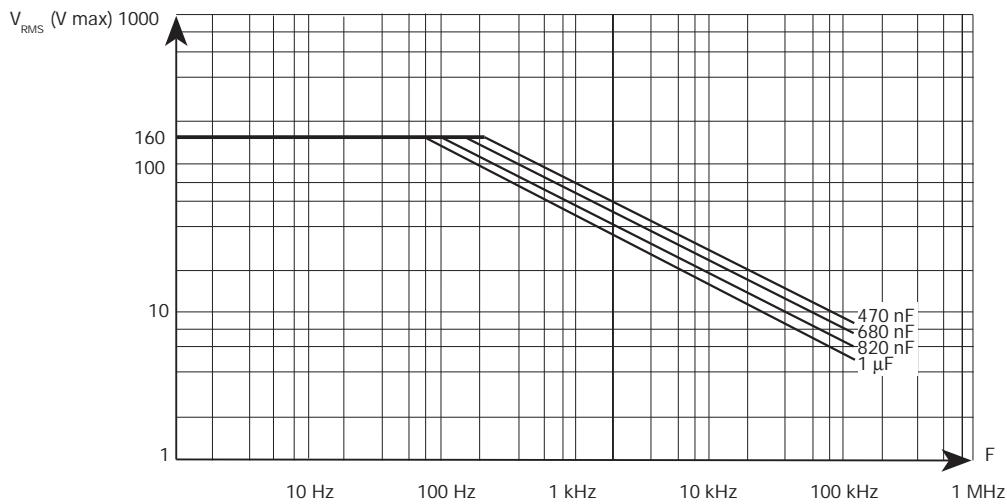

APPLICATIONS

Non-inductive, capacitor for professional use with radial leads. Insulated thermoplastic casing, epoxy resin sealed with stand-offs.

Some examples of use:

Oscillating circuit, LF filter, coupling and decoupling, frequency discriminator.

STANDARDIZATION

Generic specifications:

CEI 384-1/CECC 30000/UTE 83100

Sectional specifications:

CEI 384-2/CECC 30400/UTE 83151


On the LNZ 44-04 list:

Complies with type CPM50

On the GAM-T1 list:

ARIANE qualified

Schematic Cross Section

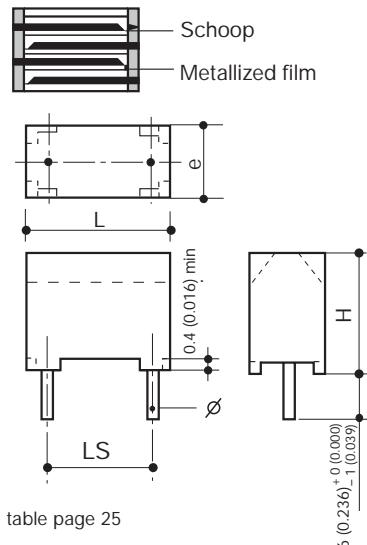

DIMENSIONS:

millimeters (inches)

Size Code	L max.	H max.	e max.	LS ±0.4	$\varnothing_{-0.05}^{+10\%}$	Observations
07	10.1 (0.398)	10.0 (0.394)	5.0 (0.197)	7.5 (0.295)	0.6 (0.024)	$1\text{nF} \leq C_R \leq 8.2\text{nF}$
10	12.5 (0.492)	10.0 (0.394)	5.0 (0.197)	10.0 (0.394)	0.6 (0.024)	$4.7\text{nF} \leq C_R \leq 220\text{nF}$
15	17.5 (0.689)	10.5 ... 16.5 (0.413 ... 0.650)	5.0 ... 10.0 (0.197 ... 0.394)	15.0 (0.591)	0.8 (0.031)	$15\text{nF} \leq C_R \leq 2.2\mu\text{F}$
27	31.25 (1.230)	15.0 ... 30.0 (0.591 ... 1.181)	7.5 ... 17.5 (0.295 ... 0.689)	27.5 (1.083)	0.8 (0.031)	$150\text{nF} \leq C_R \leq 22\mu\text{F}$

HOW TO ORDER

BO 15



Type

4



Class

G



Voltage

0104



Capacitance Value

K



Tolerance

--



Suffix
Tape and Reel
See page 27

PERFORMANCE CHARACTERISTICS

Climatic category:	55/125/56 - Performance Class 1
Capacitance range:	C_R 1 nF to 2.2 μF
Tolerances on C_R : (assoc. series)	$\pm 5\%$, $\pm 10\%$, $\pm 20\%$ (E6) (other values on request)
Nominal voltages:	V_{R_-} 40/63/160/250/400 V V_{R_-} 25/40/100/180/200 V
Category voltage:	$V_C = 0.5 V_{R_-}$ at 125°C
Test voltage:	$V_e = 1.6 V_{R_-}$
Tangent of loss angle:	D.F. (see page 4)
Insulation resistance:	IR (see page 5)

MARKING

Logo - CPM50B

Capacitance and tolerance
(CEI 62 code)

Nominal voltage





Date of manufacture
2 letter code
(year - month) according
to CEI 62

**NOMINAL VOLTAGE (V_R) AND CAPACITANCE VALUES (C_R)
DEPENDING ON THE DIMENSIONS**

Size C a s e	Dimensions: millimeters (inches)	Reference									
		BO									
		V_{R-}/V_{R-}									
		40/25		63/40		160/100		250/180			
		Range of Capacitance (C_R min. ... max.)									
07	2	10.1 (0.398)	10.0 (0.394)	5.0 (0.197)	0.6 (0.024)	7.5 (0.295)	-	-	-	4.7 nF/8.2 nF	1 nF ... 3.3 nF
10	4	12.5 (0.492)	10.0 (0.394)	5.0 (0.197)	0.6 (0.024)	10.0 (0.394)	68 nF ... 220 nF	33 nF ... 100 nF	10 nF ... 47 nF	10 nF ... 22 nF	4.7 nF ... 10 nF
15	6	17.5 (0.689)	10.5 (0.413)	5.0 (0.197)	0.8 (0.031)	15.0 (0.591)	330 nF/470 nF	150 nF/220 nF	68 nF ... 150 nF	33 nF/47 nF	15 nF/22 nF
	7	17.5 (0.689)	13.5 (0.531)	5.0 (0.197)	0.8 (0.031)		680 nF	330 nF	220 nF	68 nF	33 nF
	8	17.5 (0.689)	13.5 (0.531)	6.25 (0.246)	0.8 (0.031)		1 μ F	470 nF	-	100 nF	47 nF
	9	17.5 (0.689)	14.5 (0.571)	8.5 (0.335)	0.8 (0.031)		1.5 μ F	680 nF	330 nF	150 nF	68 nF
	10	17.5 (0.689)	16.5 (0.650)	10.0 (0.394)	0.8 (0.031)		2.2 μ F	1 μ F	470 nF	220 nF	100 nF
27	14	31.25 (1.230)	15.0 (0.591)	7.5 (0.295)	0.8 (0.031)	27.5 (1.083)	3.3 μ F	1.5 μ F	680 nF/1 μ F	330 nF	330 nF
	15	31.25 (1.230)	17.5 (0.689)	8.75 (0.344)	0.8 (0.031)		4.7 μ F	2.2 μ F	1.5 μ F/2.2 μ F	470 nF	220 nF
	16	31.25 (1.230)	19.5 (0.768)	10.0 (0.394)	0.8 (0.031)		6.8 μ F	3.3 μ F	-	680 nF	330 nF
	17*	31.25 (1.230)	22.5 (0.886)	12.5 (0.492)	0.8 (0.031)		10 μ F	4.7 μ F	-	1 μ F	470 nF
	18*	31.25 (1.230)	26.0 (1.024)	15.0 (0.591)	0.8 (0.031)		15 μ F	6.8 μ F	3.3 μ F	1.5 μ F	680 nF
	19*	31.25 (1.230)	30.0 (1.181)	17.5 (0.689)	0.8 (0.031)		22 μ F	10 μ F	4.7 μ F/6.8 μ F	2.2 μ F	1 μ F

CHARACTERISTIC CURVES

Influence of the frequency on the impedance (room temperature).

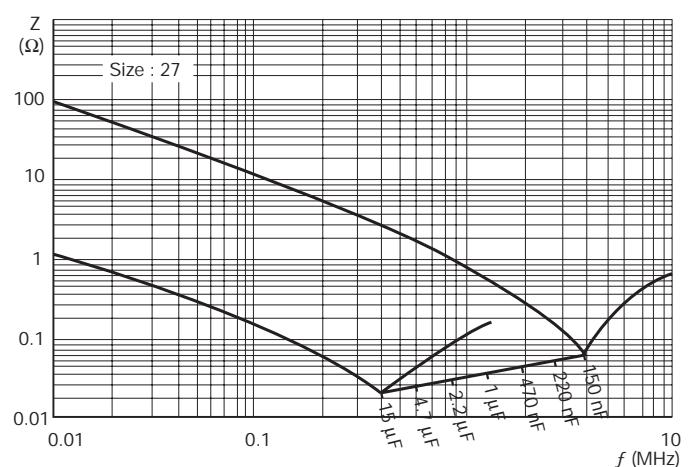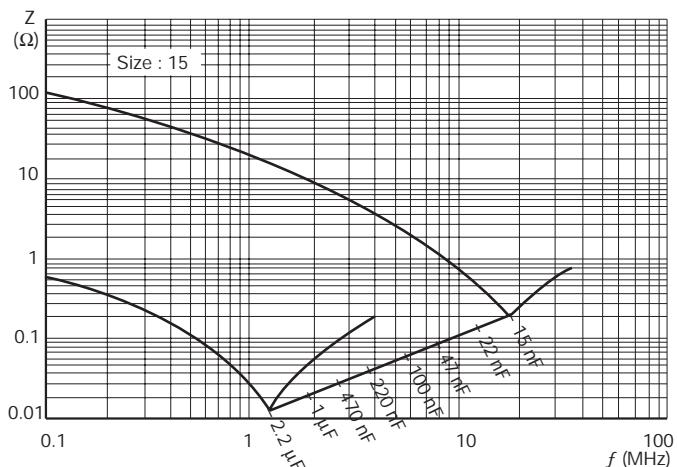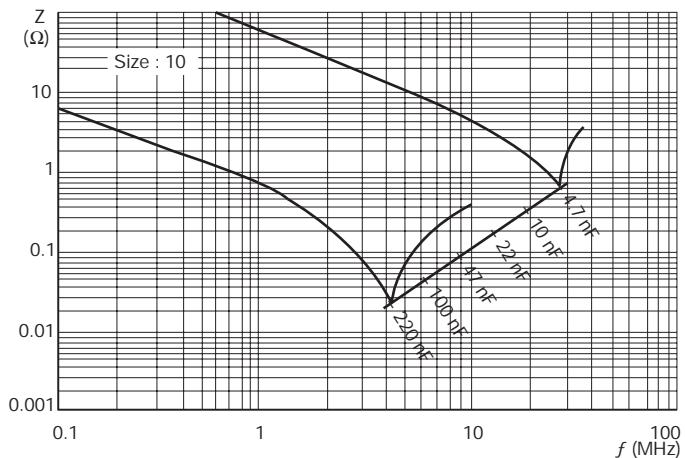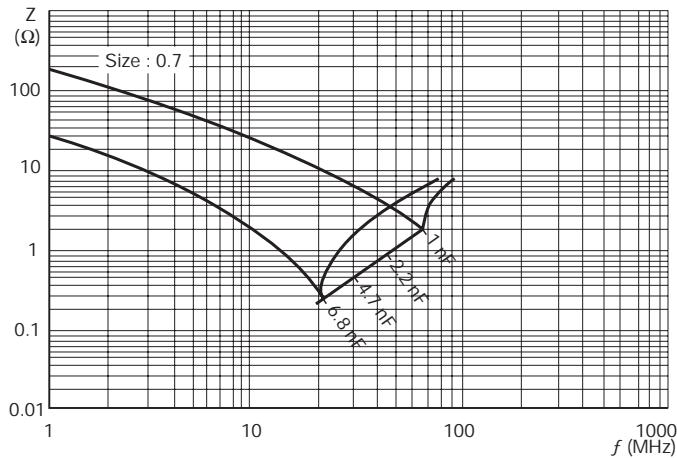

CHARACTERISTICS OF THE REEL –


Suffixes to be used (see page 7) millimeters (inches)

Taping Suffix EN	
Lead Spacing tol ± 0.4 (0.016)	
7.5 (0.295)	10 (0.394)
15 (0.590)	
P	12.7 ± 1.0 (0.5 ± 0.039)
H	16.5 ± 0.3 (0.650 ± 0.012)
	$16^{+1.5}_{-0.5}$ ($0.630^{+0.059}_{-0.020}$)

PACKAGING

Size	Case Code	Minimum Quantity* Reel	Quantity* Bulk
7.5	1	2000	3000
	2	1250	1750
	C	1250	1500
	D	1000	1000
10	E0	850	1750
	4	700	1250
	5	700	1000
15	6	1000	750
	7	1000	3000
	I0	1000	750
	8	833	3000
	9	625	2000
22	10	–	225
	11	–	200
	12	–	200
27	13	–	150
	14	–	160
	15	–	140
	16	–	120
	17	–	100
	18	–	80
	19	–	65

* Ordering quantities must be a multiple of the above figures

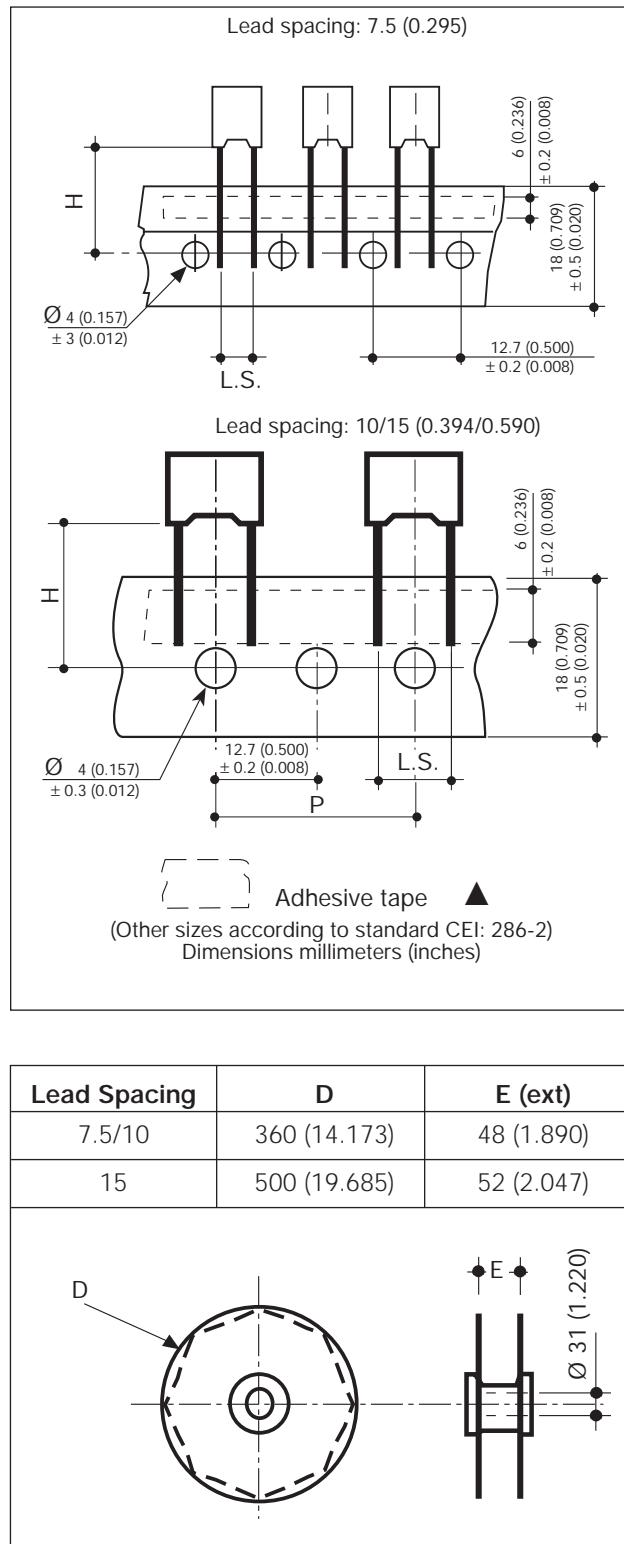

APPLICATIONS

Non-inductive, capacitor for professional use with radial leads. Flat, insulated (polyester tape wrapping) epoxy resin sealed.

Some examples of use:

Oscillating circuit, LF filter, coupling and decoupling, frequency discriminator.

STANDARDIZATION

Generic specifications:

CEI 384-1/CECC 30000/UTE 83100

Sectional specifications:



CEI 384-2/CECC 30400/UTE 83151

On the LNZ 44-04 list:

Complies with type CPM13

On the GAM-T1 list.

Schematic Cross Section

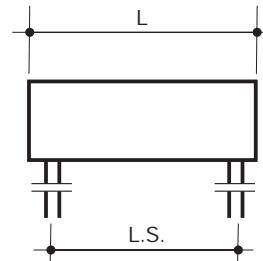

millimeters (inches)

DIMENSIONS:

Size Code	L max.	H max.	e max.	LS ±0.5	Ø ^{+10%} -0.05	Observations
07	12.0 (0.472)	7.5 (0.295)	4.5 (0.177)	7.62 (0.300)	0.6 (0.024)	1nF ≤ C _R ≤ 6.8nF
10	14.5 (0.571)	7.5 / 8.0 (0.295 / 0.315)	4.5 / 5.0 (0.177 / 0.197)	10.16 (0.400)	0.6 (0.024)	4.7nF ≤ C _R ≤ 100nF
15	20.0 (0.787)	8.0 ... 15.5 (0.315 ... 0.610)	4.5 ... 10.5 (0.177 ... 0.413)	15.24 (0.600)	0.8 (0.031)	15nF ≤ C _R ≤ 1μF
27	33.0 (1.299)	11.0 ... 27.5 (0.433 ... 1.083)	8.0 ... 18.0 (0.315 ... 0.709)	27.94 (1.100)	1.0 (0.039)	150nF ≤ C _R ≤ 10μF

HOW TO ORDER

S4 15

4

G

0104

K

--

Suffix
Tape and Reel
See page 47

PERFORMANCE CHARACTERISTICS

Climatic category: 55/125/21 - Performance Class 1

Capacitance range: C_R 1 nF to 10 μF

Tolerances on C_R: ±5%, ±10%, ±20% (E6)
(assoc. series)
(other values on request)

Nominal voltages: V_{R-} 63/160/250/400 V
V_{R-} 40/100/160/200 V

Category voltage: V_C = 0.5 V_{R-} at 125°C

Test voltage: V_e = 1.6 V_{R-}

Tangent of loss angle: D.F. (see page 4)

Insulation resistance: IR (see page 5)

MARKING

Logo - CPM13B

Capacitance and tolerance
(CEI 62 code)

Nominal voltage

Date of manufacture

2 letter code




(year - month) according
to CEI 62
except for L = 12 and 14.5mm

NOMINAL VOLTAGE (V_R) AND CAPACITANCE VALUES (C_R) DEPENDING ON THE DIMENSIONS

Size Code	DIMENSIONS: millimeters (inches)					Reference			
						S4			
						V_{R+}/V_{R-}			
	Max L	Max H	Max e	\emptyset +10% -0.05	LS ± 0.5	63/40	160/100	250/160	400/200
						Range of Capacitance (C_R min. ... max.)			
07	12.0 (0.472)	7.5 (0.295)	4.5 (0.177)	0.6 (0.024)	7.62 (0.300)	-	-	4.7 nF/6.8 nF	1 nF ... 3.3 nF
10	14.5 (0.571) 14.5 (0.571)	7.5 (0.295) 8.0 (0.315)	4.5 (0.177) 5.0 (0.197)	0.6 (0.024) 0.6 (0.024)	10.16 (0.400)	33 nF ... 100 nF -	10 nF ... 33 nF 47 nF	10 nF ... 22 nF -	4.7 nF ... 10 nF -
15	20.0 (0.787) 20.0 (0.787) 20.0 (0.787) 20.0 (0.787)	8.0 (0.315) 8.0 (0.315) 8.5 (0.335) 8.5 (0.335)	4.5 (0.177) 5.5 (0.217) 4.5 (0.177) 5.0 (0.197)	0.8 (0.031) 0.8 (0.031) 0.8 (0.031) 0.8 (0.031)	15.24 (0.600)	-	68 nF 100 nF	33 nF -	15 nF -
	20.0 (0.787) 20.0 (0.787) 20.0 (0.787) 20.0 (0.787)	9.0 (0.354) 9.0 (0.354) 9.5 (0.374) 9.5 (0.374)	5.0 (0.197) 6.0 (0.236) 6.0 (0.236) 6.5 (0.256)	0.8 (0.031) 0.8 (0.031) 0.8 (0.031) 0.8 (0.031)		150 nF 330 nF -	- -	47 nF 68 nF	- -
	20.0 (0.787) 20.0 (0.787) 20.0 (0.787) 20.0 (0.787)	10.0 (0.394) 10.5 (0.413) 10.5 (0.413) 11.5 (0.453)	7.0 (0.276) 6.5 (0.256) 7.5 (0.295) 8.5 (0.335)	0.8 (0.031) 0.8 (0.031) 0.8 (0.031) 0.8 (0.031)		220nF -	- 150 nF	- -	33 nF -
	20.0 (0.787) 20.0 (0.787) 20.0 (0.787) 20.0 (0.787)	10.0 (0.394) 10.5 (0.413) 10.5 (0.413) 11.5 (0.453)	7.0 (0.276) 6.5 (0.256) 7.5 (0.295) 8.5 (0.335)	0.8 (0.031) 0.8 (0.031) 0.8 (0.031) 0.8 (0.031)		470 nF -	- 220 nF	100 nF -	- 47 nF
	20.0 (0.787) 20.0 (0.787) 20.0 (0.787) 20.0 (0.787)	13.5 (0.531) 13.5 (0.531) 13.5 (0.531) 14.0 (0.551)	6.5 (0.256) 8.0 (0.315) 8.0 (0.315) 7.5 (0.295)	0.8 (0.031) 0.8 (0.031) 0.8 (0.031) 0.8 (0.031)		- -	- -	- 150 nF	- 68 nF
	20.0 (0.787) 20.0 (0.787) 20.0 (0.787) 20.0 (0.787)	13.5 (0.531) 13.5 (0.531) 13.5 (0.531) 15.0 (0.591)	10.5 (0.413) 10.5 (0.413) 10.5 (0.413) 8.5 (0.335)	0.8 (0.031) 0.8 (0.031) 0.8 (0.031) 0.8 (0.031)		1 μ F -	- 330 nF	- -	- -
	20.0 (0.787) 20.0 (0.787)	15.0 (0.591) 15.5 (0.610)	8.5 (0.335) 9.0 (0.354)	0.8 (0.031) 0.8 (0.031)		- -	- 470 nF	220 nF -	100 nF -
27	33.0 (1.299) 33.0 (1.299) 33.0 (1.299) 33.0 (1.299)	11.0 (0.433) 13.0 (0.512) 13.0 (0.512) 13.5 (0.531)	8.0 (0.315) 7.0 (0.276) 10.0 (0.394) 7.5 (0.295)	1.0 (0.039) 1.0 (0.039) 1.0 (0.039) 1.0 (0.039)	27.94 (1.100)	1.5 μ F -	- -	- -	- 150 nF
	33.0 (1.299) 33.0 (1.299) 33.0 (1.299) 33.0 (1.299)	14.5 (0.571) 14.5 (0.571) 15.0 (0.591) 15.0 (0.591)	8.5 (0.335) 11.5 (0.453) 9.0 (0.354) 10.5 (0.413)	1.0 (0.039) 1.0 (0.039) 1.0 (0.039) 1.0 (0.039)		2.2 μ F -	- 680 nF	330 nF -	- -
	33.0 (1.299) 33.0 (1.299) 33.0 (1.299) 33.0 (1.299)	14.5 (0.571) 14.5 (0.571) 15.0 (0.591) 15.0 (0.591)	11.5 (0.453) 11.5 (0.453) 9.0 (0.354) 10.5 (0.413)	1.0 (0.039) 1.0 (0.039) 1.0 (0.039) 1.0 (0.039)		- 3.3 μ F -	- 1 μ F	470 nF -	220 nF -
	33.0 (1.299) 33.0 (1.299) 33.0 (1.299) 33.0 (1.299)	15.5 (0.610) 16.0 (0.630) 18.5 (0.728) 20.0 (0.787)	11.0 (0.433) 11.5 (0.453) 14.0 (0.551) 12.0 (0.472)	1.0 (0.039) 1.0 (0.039) 1.0 (0.039) 1.0 (0.039)		- 4.7 μ F -	- 2.2 μ F	- -	- -
	33.0 (1.299) 33.0 (1.299) 33.0 (1.299) 33.0 (1.299)	20.5 (0.807) 21.0 (0.827) 23.5 (0.925) 24.0 (0.945)	11.0 (0.433) 16.5 (0.650) 14.0 (0.551) 14.5 (0.571)	1.0 (0.039) 1.0 (0.039) 1.0 (0.039) 1.0 (0.039)		- 6.8 μ F -	- -	1 μ F 1.5 μ F	470 nF -
	33.0 (1.299) 33.0 (1.299) 33.0 (1.299) 33.0 (1.299)	24.5 (0.965) 26.5 (1.043) 27.5 (1.083)	15.0 (0.591) 17.0 (0.669) 18.0 (0.709)	1.0 (0.039) 1.0 (0.039) 1.0 (0.039)		- -	3.3 μ F 4.7 μ F	- 2.2 μ F	- 1 μ F
	33.0 (1.299)	27.5 (1.083)	18.0 (0.709)	1.0 (0.039)		10 μ F	-	-	-

CHARACTERISTIC CURVES

Influence of the frequency on the impedance (room temperature).

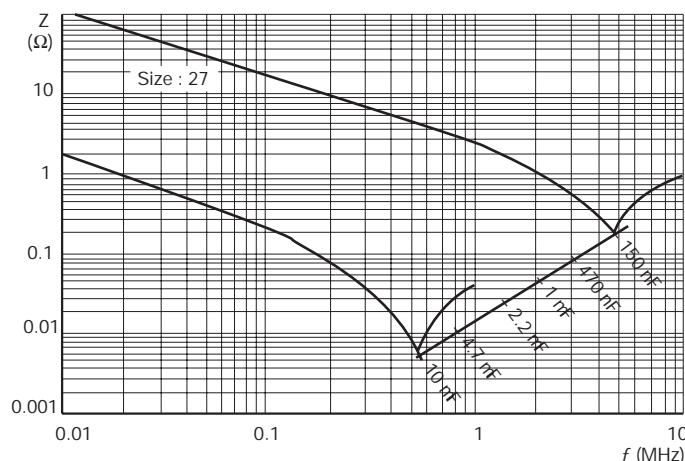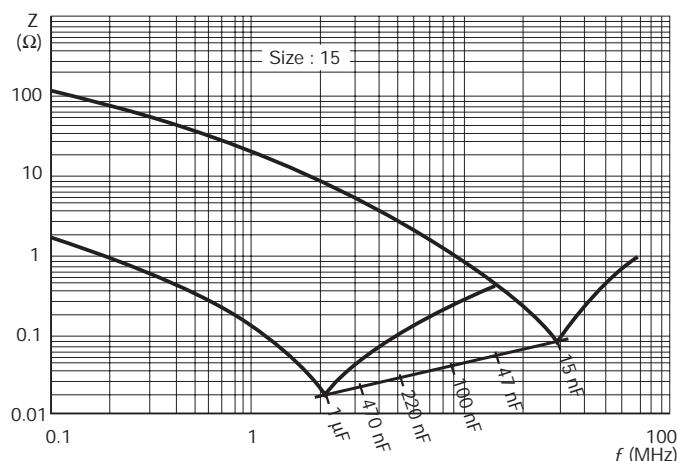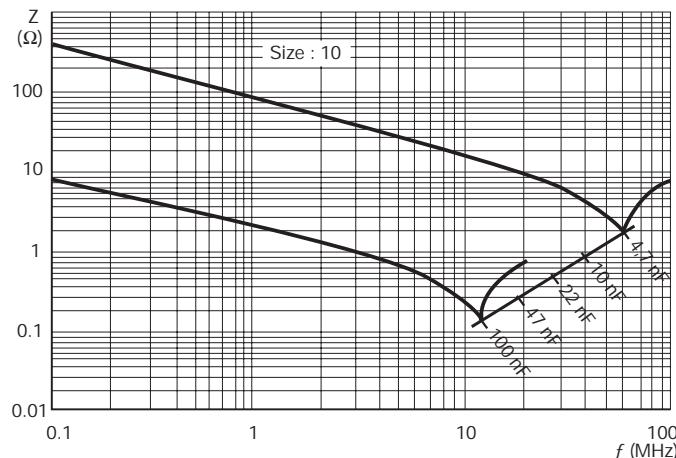

CPM-8 — Axial Leads 63/160/250/400 V-

APPLICATIONS

Non-inductive, capacitor for professional use. Flat axial, polyester wrapped, epoxy resin sealed.

Some examples of use:

Oscillating circuit, LF filter, coupling and decoupling, frequency discriminator.

STANDARDIZATION

Generic specifications:

CEI 384-1/CECC 30000/UTE 83100

Sectional specifications:


CEI 384-2/CECC 30400/UTE 83151

On the LNZ 44-04 list:

Complies with type CPM8

NOTE: For new design, please refer to SH series (optimized range)

Schematic Cross Section

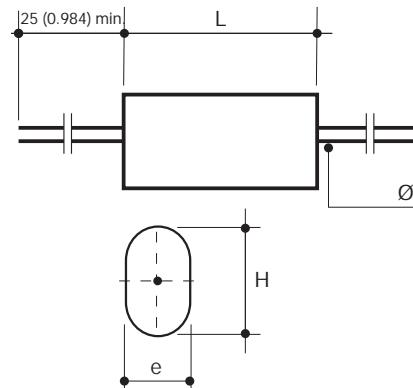

DIMENSIONS:

millimeters (inches)

Size Code	L max.	H max.	e max.	$\varnothing^{+10\%}_{-0.05}$	Observations
10	12.0 (0.472)	6.5 (0.256)	4.0 (0.157)	0.6 (0.024)	$1nF \leq C_R \leq 6.8nF$
14	14.5 (0.571)	6.0 ... 8.0 (0.236 ... 0.315)	3.5 / 5.0 (0.138 / 0.197)	0.6 (0.024)	$4.7nF \leq C_R \leq 100nF$
18	20.0 (0.787)	8.0 ... 15.5 (0.315 ... 0.610)	4.5 ... 10.5 (0.177 ... 0.413)	0.8 (0.031)	$15nF \leq C_R \leq 1\mu F$
31	33.0 (1.299)	11.0 ... 27.5 (0.433 ... 1.083)	7.0 ... 18.0 (0.276 ... 0.709)	1.0 (0.039)	$150nF \leq C_R \leq 10\mu F$

HOW TO ORDER

S8 15
—
Type

4
—
Class

G
—
Voltage

0104
—
Capacitance Value

K
—
Tolerance

--
—
Suffix
Tape and Reel
See page 47

PERFORMANCE CHARACTERISTICS

Climatic category:	55/125/21 - Performance Class 1
Capacitance range:	C_R 1 nF to 10 μF
Tolerances on C_R (assoc. series):	$\pm 5\%$, $\pm 10\%$, $\pm 20\%$ (E6) (other values on request)
Nominal voltages:	V_{R-} 63/160/250/400 V V_{R-} 40/100/160/200 V
Category voltage:	$V_C = 0.5 V_{R-}$ at 125°C
Test voltage:	$V_e = 1.6 V_{R-}$
Tangent of loss angle:	D.F. (see page 4)
Insulation resistance:	IR (see page 5)

MARKING

Logo - CPM8B
Capacitance and tolerance (CEI 62 code)
Nominal voltage




Date of manufacture
2 letter code
(year - month) according
to CEI 62
except for L = 12 and 14.5mm

**NOMINAL VOLTAGE (V_R) AND CAPACITANCE VALUES (C_R)
DEPENDING ON THE DIMENSIONS**

Size Code	DIMENSIONS: millimeters (inches)					Reference			
						S8			
						V_{R+}/V_{R-}			
			63/40 160/100 250/160 400/200		Range of Capacitance (C_R min. ... max.)				
10	12.0 (0.472)	6.5 (0.256)	4.0 (0.157)	0.6 (0.024) ^{+10%} _{-0.05}	–	–	4.7 nF/6.8 nF	1 nF ... 3.3 nF	
14	14.5 (0.571)	6.0 (0.236)	3.5 (0.138)	0.6 (0.024)	33 nF	–	–	–	
	14.5 (0.571)	6.5 (0.256)	3.5 (0.138)	0.6 (0.024)	47 nF	–	–	–	
	14.5 (0.571)	6.5 (0.256)	4.0 (0.157)	0.6 (0.024)	–	10 nF/22 nF	10 nF	4.7 nF	
	14.5 (0.571)	7.0 (0.276)	4.0 (0.157)	0.6 (0.024)	68 nF	–	15 nF	–	
	14.5 (0.571)	7.0 (0.276)	4.5 (0.177)	0.6 (0.024)	–	–	–	6.8 nF/10 nF	
	14.5 (0.571)	7.5 (0.295)	4.5 (0.177)	0.6 (0.024)	100 nF	33 nF	22 nF	–	
	14.5 (0.571)	8.0 (0.315)	5.0 (0.197)	0.6 (0.024)	–	47 nF	–	–	
18	20.0 (0.787)	8.0 (0.315)	4.5 (0.177)	0.8 (0.031)	–	68 nF	33 nF	15 nF	
	20.0 (0.787)	8.0 (0.315)	5.5 (0.217)	0.8 (0.031)	–	100 nF	–	–	
	20.0 (0.787)	8.5 (0.335)	4.5 (0.177)	0.8 (0.031)	150 nF	–	–	–	
	20.0 (0.787)	8.5 (0.335)	5.0 (0.197)	0.8 (0.031)	220 nF	–	–	22 nF	
	20.0 (0.787)	9.0 (0.354)	5.0 (0.197)	0.8 (0.031)	–	–	47 nF	–	
	20.0 (0.787)	9.0 (0.354)	6.0 (0.236)	0.8 (0.031)	330 nF	–	68 nF	–	
	20.0 (0.787)	9.5 (0.374)	6.0 (0.236)	0.8 (0.031)	–	–	–	33 nF	
	20.0 (0.787)	9.5 (0.374)	6.5 (0.256)	0.8 (0.031)	–	150 nF	–	–	
	20.0 (0.787)	10.0 (0.394)	7.0 (0.276)	0.8 (0.031)	470 nF	–	100 nF	–	
	20.0 (0.787)	10.5 (0.413)	6.5 (0.256)	0.8 (0.031)	–	–	–	47 nF	
	20.0 (0.787)	10.5 (0.413)	7.5 (0.295)	0.8 (0.031)	–	220 nF	–	–	
	20.0 (0.787)	11.5 (0.453)	8.5 (0.335)	0.8 (0.031)	680 nF	–	–	–	
	20.0 (0.787)	13.5 (0.531)	6.5 (0.256)	0.8 (0.031)	–	–	–	68 nF	
	20.0 (0.787)	13.5 (0.531)	8.0 (0.315)	0.8 (0.031)	–	–	150 nF	–	
31	33.0 (1.299)	13.0 (0.512)	10.0 (0.394)	1.0 (0.039)	2.2 µF	–	–	–	
	33.0 (1.299)	13.5 (0.531)	7.5 (0.295)	1.0 (0.039)	–	680 nF	330 nF	–	
	33.0 (1.299)	14.5 (0.571)	8.5 (0.335)	1.0 (0.039)	–	–	470 nF	220 nF	
	33.0 (1.299)	14.5 (0.571)	11.5 (0.453)	1.0 (0.039)	3.3 µF	–	–	–	
	33.0 (1.299)	15.0 (0.591)	9.0 (0.354)	1.0 (0.039)	–	1 µF	–	–	
	33.0 (1.299)	15.0 (0.591)	10.5 (0.413)	1.0 (0.039)	–	–	–	330 nF	
	33.0 (1.299)	15.5 (0.610)	11.0 (0.433)	1.0 (0.039)	–	–	680 nF	–	
	33.0 (1.299)	16.0 (0.630)	11.5 (0.453)	1.0 (0.039)	–	1.5 µF	–	–	
	33.0 (1.299)	18.5 (0.728)	14.0 (0.551)	1.0 (0.039)	4.7 µF	–	–	–	
	33.0 (1.299)	20.0 (0.787)	12.0 (0.472)	1.0 (0.039)	–	2.2 µF	–	–	
33.0 (1.299)	20.5 (0.807)	11.0 (0.433)	1.0 (0.039)	–	–	–	1 µF	470 nF	
	21.0 (0.827)	16.5 (0.650)	1.0 (0.039)	6.8 µF	–	–	–	–	
	23.5 (0.925)	14.0 (0.551)	1.0 (0.039)	–	–	–	–	680 nF	
	24.0 (0.945)	14.5 (0.571)	1.0 (0.039)	–	–	–	1.5 µF	–	
	24.5 (0.965)	15.0 (0.591)	1.0 (0.039)	–	3.3 µF	–	–	–	
	26.5 (1.043)	17.0 (0.669)	1.0 (0.039)	–	–	–	–	1 µF	
	27.5 (1.083)	18.0 (0.709)	1.0 (0.039)	10 µF	4.7 µF	2.2 µF	–	–	

CHARACTERISTIC CURVES

Influence of the frequency on the impedance (room temperature).

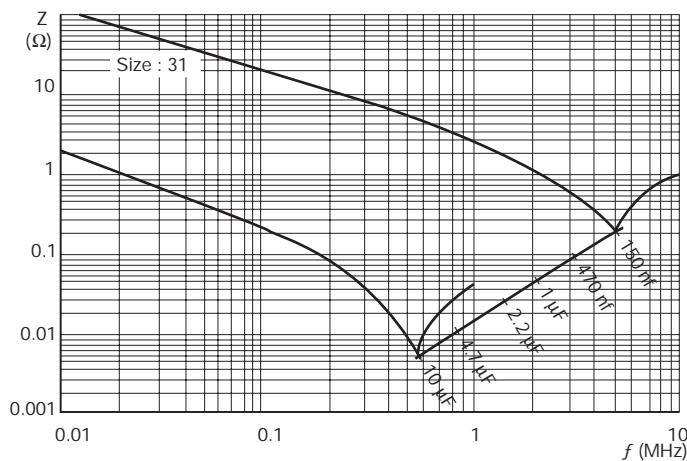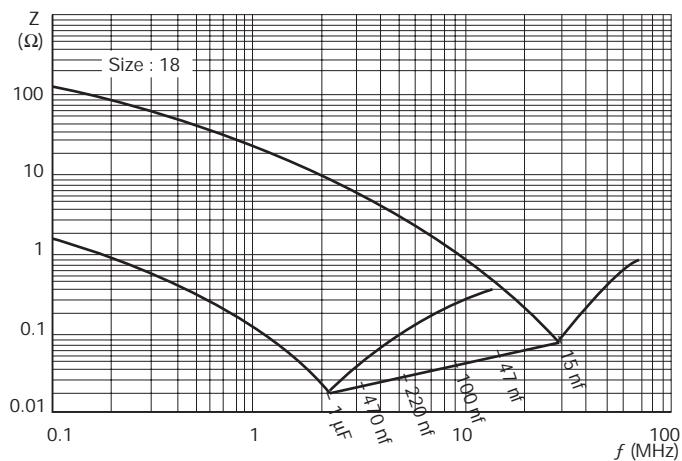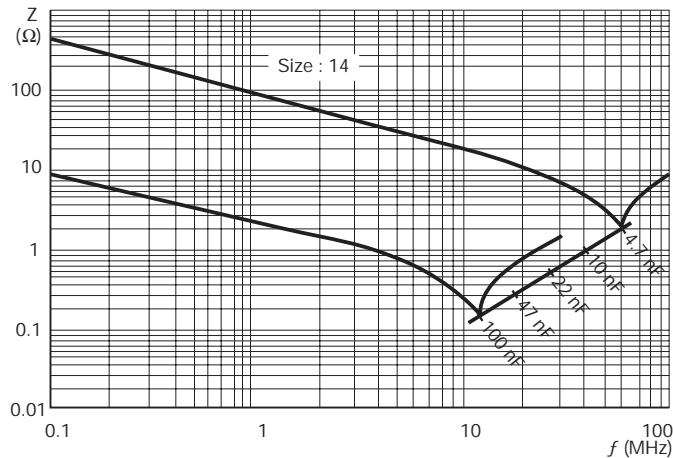


APPLICATIONS

Non-inductive, capacitor for professional use. Flat axial, polyester wrapped, epoxy resin sealed.

Some examples of use:

Oscillating circuit, LF filter, coupling and decoupling, frequency discriminator.

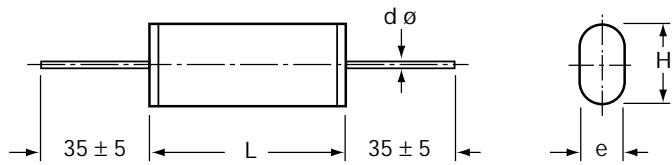

STANDARDIZATION

Generic specifications:

CEI 384-1/CECC 30000/UTE 83100

Sectional specifications:

CEI 384-2/CECC 30400/UTE 83151

On the LNZ 44-04 list:

Complies with type CPM8

millimeters (inches)

e max.	≤ 5	> 5	≥ 7
$\emptyset d \pm 0.05$ (0.002)	0.6 (0.024)	0.8 (0.031)	1.0 (0.039)

PERFORMANCE CHARACTERISTICS


Protection:	Flat axial leads, polyester wrapped, epoxy resin sealed
Temperature range:	-55°C to +100°C with voltage derating of 1.25%/°C between 85°C and 100°C
Climatic category:	55/100/56
Voltage range:	63 VDC to 1000 VDC
Capacitance range:	1 nF to 22 µF
Tolerances on C_R :	±5%, ±10%, ±20%
Test voltage:	1.6 $V_n / 2$ s
Insulation resistance:	
Measurement condition:	
Temperature:	25°C ± 5°C
Duration:	1 minute
Measurement Voltage:	100 V for $V_n \geq 100$ V 50 V for $V_n < 100$ V
Requirements:	
For $U_n \leq 100$ V:	$C \leq 0.33 \mu F \geq 15\,000 M\Omega$ $C > 0.33 \mu F \geq 5\,000 S$
For $U_n > 100$ V:	$C \leq 0.33 \mu F \geq 30\,000 M\Omega$ $C > 0.33 \mu F \geq 10\,000 S$

Tangent of loss angle:

LIMIT VALUES

	$C \leq 0.1 \mu F$	$0.1 \mu F < C \leq 1 \mu F$	$C > 1 \mu F$
1 kHz	8×10^{-3}	8×10^{-3}	10×10^{-3}
10 kHz	15×10^{-3}	15×10^{-3}	
100 Hz	30×10^{-3}		


Range

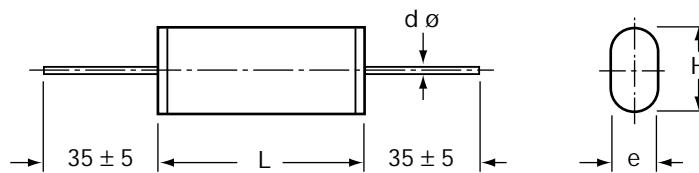

millimeters (inches)

Capacitance	63 V DC / 40 V AC			100 V DC / 63 V AC			250 V DC / 160 V AC					
	Size Code	e	H	L	Size Code	e	H	L	Size Code	e	H	L
0.01 µF									13	4.0 (0.157)	7.0 (0.276)	13.0 (0.512)
0.015 µF									13	4.0 (0.157)	7.0 (0.276)	13.0 (0.512)
0.022 µF					13	4.0 (0.157)	7.0 (0.276)	13.0 (0.512)	13	4.0 (0.157)	8.0 (0.315)	13.0 (0.512)
0.033 µF					13	4.0 (0.157)	7.0 (0.276)	13.0 (0.512)	13	4.0 (0.157)	8.0 (0.315)	13.0 (0.512)
0.047 µF					13	4.0 (0.157)	7.0 (0.276)	13.0 (0.512)	13	5.0 (0.197)	8.0 (0.315)	13.0 (0.512)
0.068 µF					13	4.0 (0.157)	7.0 (0.276)	13.0 (0.512)	13	5.0 (0.197)	8.0 (0.315)	13.0 (0.512)
0.1 µF					13	4.0 (0.157)	7.0 (0.276)	13.0 (0.512)	18	4.0 (0.157)	8.0 (0.315)	18.0 (0.709)
0.15 µF					13	4.0 (0.157)	7.0 (0.276)	13.0 (0.512)	18	5.0 (0.197)	9.0 (0.354)	18.0 (0.709)
0.22 µF	13	4.0 (0.157)	7.0 (0.276)	13.0 (0.512)	13	5.0 (0.197)	8.0 (0.315)	13.0 (0.512)	18	5.0 (0.197)	10.0 (0.394)	18.0 (0.709)
0.33 µF	13	4.0 (0.157)	7.0 (0.276)	13.0 (0.512)	18	5.0 (0.197)	8.0 (0.315)	18.0 (0.709)	18	6.0 (0.236)	11.0 (0.433)	18.0 (0.709)
0.47 µF	13	5.0 (0.197)	9.0 (0.354)	13.0 (0.512)	18	5.0 (0.197)	9.0 (0.354)	18.0 (0.709)	25	5.0 (0.197)	12.0 (0.472)	25.0 (0.984)
0.68 µF	13	6.0 (0.236)	9.0 (0.354)	13.0 (0.512)	18	6.0 (0.236)	9.0 (0.354)	18.0 (0.709)	25	6.0 (0.236)	13.0 (0.512)	25.0 (0.984)
1 µF	13	6.0 (0.236)	9.0 (0.354)	13.0 (0.512)	13	8.0 (0.315)	11.0 (0.433)	13.0 (0.512)	18	9.0 (0.354)	14.0 (0.551)	18.0 (0.709)
1 µF	18	5.0 (0.197)	10.0 (0.394)	18.0 (0.709)	18	7.0 (0.276)	11.0 (0.433)	18.0 (0.709)	25	7.0 (0.276)	15.0 (0.591)	25.0 (0.984)
1.5 µF	13	7.0 (0.276)	10.0 (0.394)	13.0 (0.512)	18	9.0 (0.354)	13.0 (0.512)	18.0 (0.709)	25	9.0 (0.354)	15.0 (0.591)	25.0 (0.984)
1.5 µF	18	6.5 (0.260)	11.0 (0.433)	18.0 (0.709)	25	6.0 (0.236)	14.0 (0.551)	25.0 (0.984)	30	8.0 (0.315)	16.0 (0.630)	30.0 (1.181)
2.2 µF	13	9.0 (0.354)	12.0 (0.472)	13.0 (0.512)	18	11.0 (0.433)	15.0 (0.591)	18.0 (0.709)	25	9.0 (0.354)	17.0 (0.669)	25.0 (0.984)
2.2 µF	18	7.0 (0.276)	12.0 (0.472)	18.0 (0.709)	25	7.0 (0.276)	16.0 (0.630)	25.0 (0.984)	30	10.0 (0.394)	18.0 (0.709)	30.0 (1.181)
3.3 µF	18	8.5 (0.335)	13.5 (0.531)	18.0 (0.709)	18	13.0 (0.512)	17.0 (0.669)	18.0 (0.709)	25	15.0 (0.591)	19.0 (0.748)	25.0 (0.984)
3.3 µF	25	6.0 (0.236)	14.0 (0.551)	25.0 (0.984)	25	9.0 (0.354)	16.0 (0.630)	25.0 (0.984)	30	12.0 (0.472)	20.0 (0.787)	30.0 (1.181)
4.7 µF	18	10.0 (0.394)	15.0 (0.591)	18.0 (0.709)	25	12.0 (0.472)	18.0 (0.709)	25.0 (0.984)	30	16.0 (0.630)	22.0 (0.866)	30.0 (1.181)
4.7 µF	25	7.0 (0.276)	15.0 (0.591)	25.0 (0.984)	30	10.0 (0.394)	18.0 (0.709)	30.0 (1.181)	40	12.0 (0.472)	27.0 (1.063)	40.0 (1.575)
6.8 µF	18	14.0 (0.551)	19.0 (0.748)	18.0 (0.709)	25	15.0 (0.591)	21.0 (0.827)	25.0 (0.984)	30	18.0 (0.709)	24.0 (0.945)	30.0 (1.181)
6.8 µF	25	8.0 (0.315)	16.0 (0.630)	25.0 (0.984)	30	13.0 (0.512)	21.0 (0.827)	30.0 (1.181)	40	11.0 (0.433)	21.0 (0.827)	40.0 (1.575)
10 µF	25	11.0 (0.433)	18.0 (0.709)	25.0 (0.984)	25	18.0 (0.709)	25.0 (0.984)	25.0 (0.984)	30	21.0 (0.827)	26.0 (1.024)	30.0 (1.181)
10 µF	30	9.0 (0.354)	17.0 (0.669)	30.0 (1.181)	30	14.0 (0.551)	26.0 (1.024)	30.0 (1.181)	40	14.0 (0.551)	23.0 (0.906)	40.0 (1.575)
15 µF		upon request				upon request						
22 µF		upon request				upon request						

Range

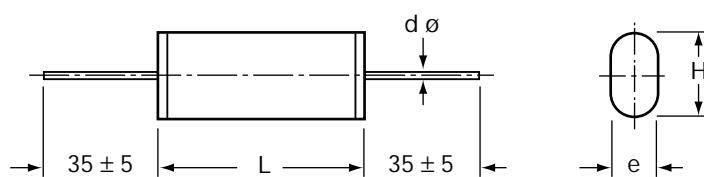

millimeters (inches)

Capacitance	400 V DC / 200 V AC				630 V DC / 220 V AC				1000 V DC / 250 V AC			
	Size Code	e	H	L	Size Code	e	H	L	Size Code	e	H	L
0.01 µF	13	4.0 (0.157)	8.0 (0.315)	13.0 (0.512)	13	5.0 (0.197)	8.0 (0.315)	13.0 (0.512)	18	5.0 (0.197)	10.0 (0.394)	18.0 (0.709)
0.015 µF	13	4.0 (0.157)	8.0 (0.315)	13.0 (0.512)	13	5.0 (0.197)	8.0 (0.315)	13.0 (0.512)	18	5.0 (0.197)	10.0 (0.394)	18.0 (0.709)
0.022 µF	13	5.0 (0.197)	8.0 (0.315)	13.0 (0.512)	13	5.0 (0.197)	8.0 (0.315)	13.0 (0.512)	18	5.5 (0.217)	11.0 (0.433)	18.0 (0.709)
0.033 µF	13	5.0 (0.197)	8.0 (0.315)	13.0 (0.512)	18	5.0 (0.197)	9.0 (0.354)	18.0 (0.709)	25	5.0 (0.197)	11.0 (0.433)	25.0 (0.984)
0.047 µF	13	5.0 (0.197)	8.0 (0.315)	13.0 (0.512)	18	6.0 (0.236)	10.0 (0.394)	18.0 (0.709)	25	6.0 (0.236)	12.0 (0.472)	25.0 (0.984)
0.068 µF	13	5.0 (0.197)	8.0 (0.315)	13.0 (0.512)	18	6.0 (0.236)	12.0 (0.472)	18.0 (0.709)	25	7.0 (0.276)	16.0 (0.630)	25.0 (0.984)
0.1 µF	18	5.0 (0.197)	9.0 (0.354)	18.0 (0.709)	18	6.0 (0.236)	13.0 (0.512)	18.0 (0.709)	25	9.0 (0.354)	16.0 (0.630)	25.0 (0.984)
0.15 µF	18	6.0 (0.236)	10.0 (0.394)	18.0 (0.709)	25	6.0 (0.236)	13.0 (0.512)	25.0 (0.984)	30	9.0 (0.354)	16.0 (0.630)	30.0 (1.181)
0.22 µF	25	5.0 (0.197)	10.0 (0.394)	25.0 (0.984)	25	7.0 (0.276)	15.0 (0.591)	25.0 (0.984)	30	10.0 (0.394)	20.0 (0.787)	30.0 (1.181)
0.33 µF	25	6.0 (0.236)	12.0 (0.472)	25.0 (0.984)	30	8.0 (0.315)	18.0 (0.709)	30.0 (1.181)	30	14.0 (0.551)	23.0 (0.906)	30.0 (1.181)
0.47 µF	25	7.0 (0.276)	14.0 (0.551)	25.0 (0.984)	30	11.0 (0.433)	18.0 (0.709)	30.0 (1.181)	40	10.0 (0.394)	22.0 (0.866)	40.0 (1.575)
0.68 µF	25	8.0 (0.315)	16.0 (0.630)	25.0 (0.984)	30	12.0 (0.472)	21.0 (0.827)	30.0 (1.181)				
1 µF	25	11.0 (0.433)	18.0 (0.709)	25.0 (0.984)	25	11.0 (0.433)	20.0 (0.787)	25.0 (0.984)				
1 µF	30	10.0 (0.394)	17.0 (0.669)	30.0 (1.181)	30	14.0 (0.551)	23.0 (0.906)	30.0 (1.181)				
1.5 µF	30	11.0 (0.433)	20.0 (0.787)	30.0 (1.181)	30	16.0 (0.630)	25.0 (0.984)	30.0 (1.181)				
1.5 µF	40	9.0 (0.354)	18.0 (0.709)	40.0 (1.575)	40	13.0 (0.512)	25.0 (0.984)	40.0 (1.575)				
2.2 µF	30	12.0 (0.472)	22.0 (0.866)	30.0 (1.181)	30	19.0 (0.748)	27.0 (1.063)	30.0 (1.181)				
2.2 µF	40	10.0 (0.394)	20.0 (0.787)	40.0 (1.575)	40	15.0 (0.591)	30.0 (1.181)	40.0 (1.575)				
3.3 µF	30	13.0 (0.512)	25.0 (0.984)	30.0 (1.181)								
3.3 µF	40	12.0 (0.472)	23.0 (0.906)	40.0 (1.575)								
4.7 µF	30	15.0 (0.591)	26.0 (1.024)	30.0 (1.181)								
4.7 µF	40	14.0 (0.551)	26.0 (1.024)	40.0 (1.575)								
6.8 µF												
6.8 µF												
10 µF												
10 µF												
15 µF												
22 µF												

SH Series

Packaging



BULK: Quantity Per Voltage



Capacitance	Voltage					
	63 V	100 V	250 V	400 V	630V	1000 V
0.01 μF			2000	2000	2000	1250
0.015 μF			2000	2000	2000	1250
0.022 μF		2000	2000	2000	1250	1250
0.033 μF		2000	2000	2000	1250	700
0.047 μF		2000	1500	1500	1250	700
0.068 μF		2000	1250	1250	1250	700
0.10 μF		2000	2000	1250	1250	700
0.15 μF		2000	1250	1250	700	300
0.22 μF	2000	2000	1250	700	700	200
0.33 μF	2000	1250	1250	700	300	200
0.47 μF	2000	1250	700	700	250	200
0.38 μF	2000	1250	700	700	200	
1 μF	2000	1250	700	300	200	
1.5 μF	1250	700	300	200	200	
2.2 μF	750	700	250	200	200	
3.3 μF	700	700	200	200		
4.7 μF	700	300	200	150		
6.8 μF	700	250	150			
10 μF	300	200	150			

APPLICATIONS

Non-inductive, insulated capacitor for professional use.
Cylindrical axial leads, polyester wrapped, epoxy resin sealed.

Some examples of use:

Oscillating circuit, LF filter, coupling and decoupling, frequency discriminator.

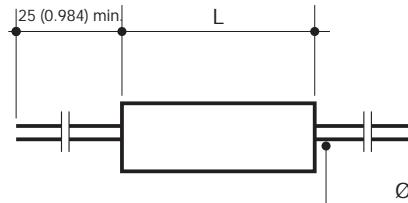

STANDARDIZATION

Generic specifications:

CEI 384-1/CECC 30000/UTE 83100

Sectional specifications:

CEI 384-2/CECC 30400/UTE 83151

On the LNZ 44-04 list:

Complies with type CPM72

NOTE: For new design, please refer to SG series (optimized range)

DIMENSIONS:

millimeters (inches)

Size Code	L max.	D max.	$\varnothing^{+10\%}_{-0.05}$	Observations
10	12.0 (0.472)	5.0 (0.197)	0.6 (0.024)	$1nF \leq C_R \leq 100nF$
13	14.5 (0.571)	5.0 ... 7.5 (0.197 ... 0.295)	0.6 (0.024)	$4.7nF \leq C_R \leq 300nF$
18	20.0 (0.787)	7.5 ... 10.0 (0.295 ... 0.394)	0.8 (0.031)	$33nF \leq C_R \leq 1\mu F$
27	27.5 (1.083)	8.75 ... 12.5 (0.344 ... 0.492)	0.8 (0.031)	$100nF \leq C_R \leq 3.3\mu F$
31	33.0 (1.299)	12.5 ... 21.5 (0.492 ... 0.846)	.08 (0.031)	$330nF \leq C_R \leq 10\mu F$

HOW TO ORDER

S9 13

4

G

0104

K

--

Suffix
Tape and Reel
See page 47

PERFORMANCE CHARACTERISTICS

Climatic category:	55/100/21 - Performance Class 1
Capacitance range:	C_R 1 nF to 10 μF
Tolerances on C_R (assoc. series):	$\pm 5\%$, $\pm 10\%$, $\pm 20\%$ (E6) (other values on request)
Nominal voltages:	V_{R-} 100/250/400/630 V V_{R-} 40/100/160/200 V
Category voltage:	$V_C = 0.75 V_{R-}$ at 100°C
Test voltage:	$V_e = 1.6 V_{R-}$
Tangent of loss angle:	D.F. (see page 4)
Insulation resistance:	IR (see page 5)

MARKING






- Logo - CPM72B
- Capacitance and tolerance (CEI 62 code)
- Nominal voltage
- Date of manufacture
- 2 letter code
(year - month) according
to CEI 62
- and available space

**NOMINAL VOLTAGE (V_R) AND CAPACITANCE VALUES (C_R)
DEPENDING ON THE DIMENSIONS**

Size Code	DIMENSIONS: millimeters (inches)			Reference			
				S9			
				V_{R-}/V_{R-}			
				100/40	250/100	400/160	630/200
Range of Capacitance (C_R min. ... max.)							
10	12.0 (0.472)	5.0 (0.197)	0.6 (0.024)	33 nF ... 100 nF	10 nF ... 22 nF	4.7 nF/6.8 nF	1 nF ... 3.3 nF
13	14.5 (0.571) 14.5 (0.571) 14.5 (0.571)	5.0 (0.197) 6.25 (0.246) 7.5 (0.295)	0.6 (0.024) 0.6 (0.024) 0.6 (0.024)	– 150 nF 220 nF/330 nF	33 nF 47 nF/68 nF 100 nF	10 nF/15nF 22 nF/33 nF 47 nF	4.7 nF/6.8 nF 10 nF 15 nF/22 nF
18	20.0 (0.787) 20.0 (0.787) 20.0 (0.787)	7.5 (0.295) 8.75 (0.344) 10.0 (0.394)	0.8 (0.031) 0.8 (0.031) 0.8 (0.031)	470 nF 680 nF 1 μF	150 nF/220 nF 330 nF 470 nF	68 nF 100 nF 150 nF	33 nF 47 nF 68 nF
27	27.5 (1.083) 27.5 (1.083) 27.5 (1.083) 27.5 (1.083)	8.75 (0.344) 10.0 (0.394) 11.25 (0.443) 12.5 (0.492)	0.8 (0.031) 0.8 (0.031) 0.8 (0.031) 0.8 (0.031)	– 1.5 μF 2.2 μF 3.3 μF	– 680 nF 1 μF –	220 nF 330 nF – 470 nF	100 nF 150 nF – 220 nF
31	33.0 (1.299) 33.0 (1.299) 33.0 (1.299) 33.0 (1.299) 33.0 (1.299) 33.0 (1.299) 33.0 (1.299)	12.5 (0.492) 13.5 (0.531) 15.0 (0.591) 16.5 (0.650) 17.5 (0.689) 18.75 (0.738) 20.0 (0.787)	0.8 (0.031) 0.8 (0.031) 0.8 (0.031) 0.8 (0.031) 0.8 (0.031) 0.8 (0.031) 0.8 (0.031)	– 4.7 μF – 6.8 μF – – 10 μF –	1.5 μF 2.2 μF – 3.3 μF – – 4.7 μF –	680 nF – 1 μF – 1.5 μF – – 2.2 μF	330 nF – 470 nF – – 680 nF – 1 μF

CHARACTERISTIC CURVES

Influence of the frequency on the impedance (room temperature).

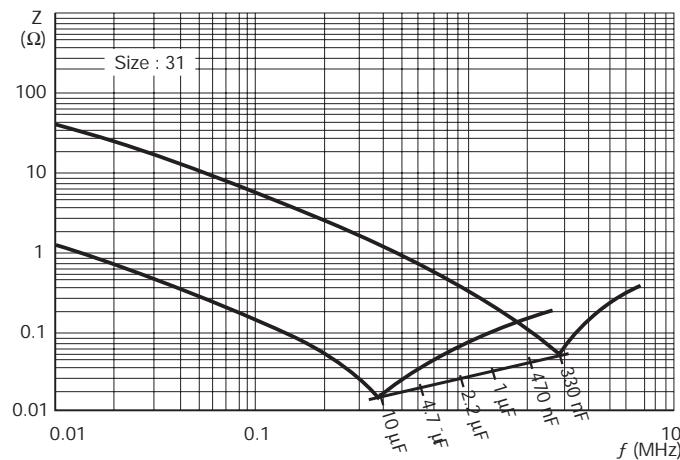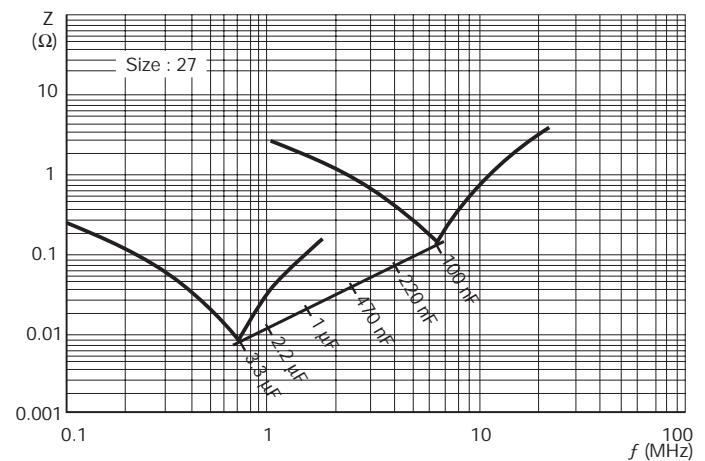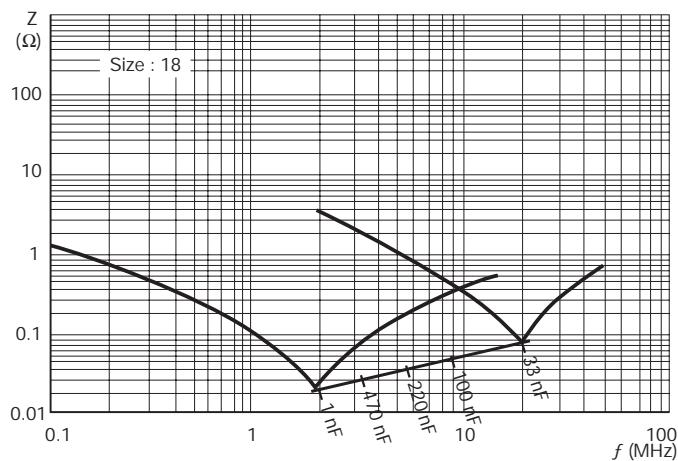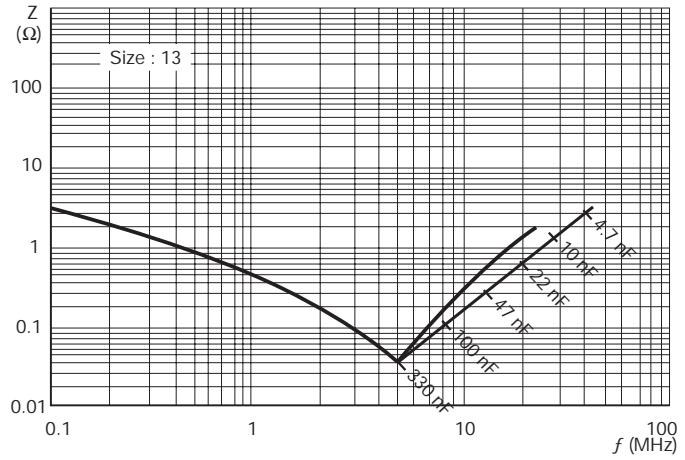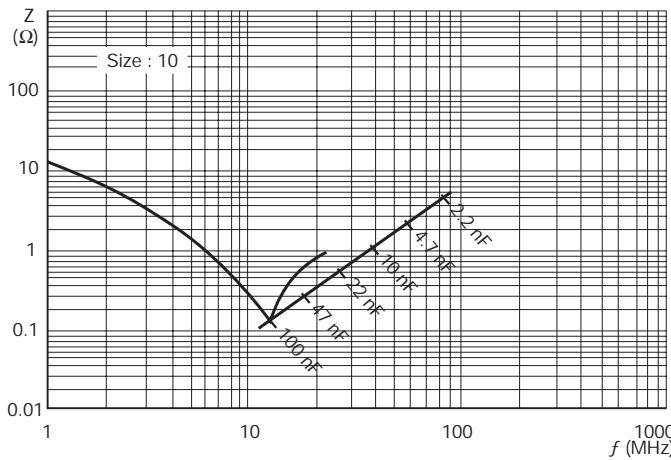


APPLICATIONS

Non-inductive, insulated capacitor for professional use.
Cylindrical axial leads, polyester wrapped, epoxy resin sealed.

Some examples of use:

Oscillating circuit, LF filter, coupling and decoupling, frequency discriminator.

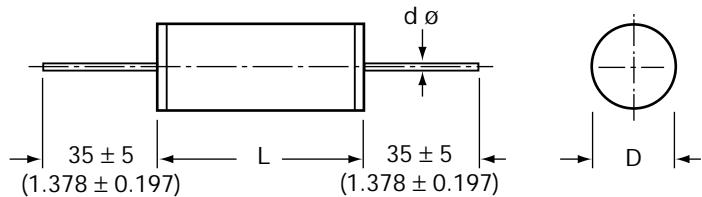

STANDARDIZATION

Generic specifications:

CEI 384-1/CECC 30000/UTE 83100

Sectional specifications:

CEI 384-2/CECC 30400/UTE 83151

On the LNZ 44-04 list:

Complies with type CPM72

PERFORMANCE CHARACTERISTICS

Protection:	Cylindrical axial leads, polyester wrapped, epoxy resin sealed
Temperature range:	-55°C to +100°C with voltage derating of 1.25%/°C between 85°C and 100°C
Climatic category:	55/100/56
Voltage range:	63 VDC to 1000 VDC
Capacitance range:	10 nF to 22 µF
Tolerances on C_R :	±5%, ±10%, ±20%
Test voltage:	1.6 $V_n / 2$ s
Insulation resistance:	

Measurement condition:

Temperature:	25°C ± 5°C
Duration:	1 minute
Measurement Voltage:	100 V for $V_n \geq 100$ V 50 V for $V_n < 100$ V

Requirements:

For $U_n \leq 100$ V:	$C \leq 0.33 \mu F \geq 15\,000 M\Omega$ $C > 0.33 \mu F \geq 5\,000 S$
For $U_n > 100$ V:	$C \leq 0.33 \mu F \geq 30\,000 M\Omega$ $C > 0.33 \mu F \geq 10\,000 S$

Tangent of loss angle:

LIMIT VALUES

	$C \leq 0.1 \mu F$	$0.1 \mu F < C \leq 1 \mu F$	$C > 1 \mu F$
1 kHz	8×10^{-3}	8×10^{-3}	10×10^{-3}
10 kHz	15×10^{-3}	15×10^{-3}	
100 Hz	30×10^{-3}		

Range

millimeters (inches)

Capacitance	63 V DC / 40 V AC			100 V DC / 63 V AC			250 V DC / 160 V AC		
	Size Code	D	L	Size Code	D	L	Size Code	D	L
0.01 μF									
0.015 μF									
0.022 μF									
0.033 μF									
0.047 μF							13	6.5 (0.256)	13.0 (0.512)
0.068 μF				13	6.5 (0.256)	13.0 (0.512)	13	7.0 (0.276)	13.0 (0.512)
0.1 μF				13	6.5 (0.256)	13.0 (0.512)	13	7.0 (0.276)	13.0 (0.512)
0.15 μF				13	6.5 (0.256)	13.0 (0.512)	13	7.5 (0.295)	13.0 (0.512)
0.22 μF	13	6.5 (0.256)	13.0 (0.512)	13	6.5 (0.256)	13.0 (0.512)	13	8.0 (0.315)	13.0 (0.512)
0.33 μF	13	6.5 (0.256)	13.0 (0.512)	18	6.0 (0.236)	18.0 (0.709)	18	8.0 (0.315)	18.0 (0.709)
0.47 μF	13	7.0 (0.276)	13.0 (0.512)	18	7.0 (0.276)	18.0 (0.709)	18	9.0 (0.354)	18.0 (0.709)
0.68 μF	13	7.0 (0.276)	13.0 (0.512)	18	8.0 (0.315)	18.0 (0.709)	18	10.0 (0.394)	18.0 (0.709)
0.68 μF	18	6.5 (0.256)	18.0 (0.709)						
1 μF	13	8.0 (0.315)	13.0 (0.512)	13	11.0 (0.433)	13.0 (0.512)	18	12.0 (0.472)	18.0 (0.709)
1 μF	18	7.5 (0.276)	18.0 (0.709)	18	9.0 (0.354)	18.0 (0.709)	25	10.0 (0.394)	25.0 (0.984)
1.5 μF	13	8.0 (0.315)	13.0 (0.512)	18	11.0 (0.433)	18.0 (0.709)	25	10.0 (0.394)	25.0 (0.984)
1.5 μF	18	8.5 (0.335)	18.0 (0.709)	25	9.0 (0.354)	25.0 (0.984)	30	11.0 (0.433)	30.0 (1.181)
2.2 μF	18	9.5 (0.374)	18.0 (0.709)	18	13.0 (0.512)	18.0 (0.709)	25	14.0 (0.551)	25.0 (0.984)
2.2 μF	25	8.5 (0.335)	25.0 (0.984)	25	11.0 (0.433)	25.0 (0.984)	30	13.0 (0.512)	30.0 (1.181)
3.3 μF	18	11.0 (0.433)	18.0 (0.709)	18	15.0 (0.591)	18.0 (0.709)	25	17.0 (0.669)	25.0 (0.984)
3.3 μF	25	10.0 (0.394)	25.0 (0.984)	25	12.0 (0.472)	25.0 (0.984)	30	14.0 (0.551)	30.0 (1.181)
4.7 μF	18	13.0 (0.512)	18.0 (0.709)	25	15.0 (0.591)	25.0 (0.984)	30	18.0 (0.709)	30.0 (1.181)
4.7 μF	25	12.0 (0.472)	25.0 (0.984)	30	14.0 (0.551)	30.0 (1.181)	40	11.0 (0.433)	40.0 (1.575)
6.8 μF	25	15.0 (0.591)	25.0 (0.984)	25	17.0 (0.669)	25.0 (0.984)	30	21.0 (0.827)	30.0 (1.181)
6.8 μF	30	12.0 (0.472)	30.0 (1.181)	30	16.0 (0.630)	30.0 (1.181)	40	13.0 (0.512)	40.0 (1.575)
10 μF	25	17.0 (0.669)	25.0 (0.984)	30	18.0 (0.709)	30.0 (1.181)	30	23.0 (0.906)	30.0 (1.181)
10 μF	30	14.5 (0.571)	30.0 (1.181)	40	16.0 (0.630)	40.0 (1.575)	40	14.0 (0.551)	40.0 (1.575)
15 μF		upon request			upon request				
22 μF		upon request			upon request				

Range

Capacitance	400 V DC / 200 V AC			630 V DC / 220 V AC			1000 V DC / 250 V AC		
	Size Code	D	L	Size Code	D	L	Size Code	D	L
0.01 μF				13	6.5 (0.256)	13.0 (0.512)	13	8.0 (0.315)	13.0 (0.512)
0.015 μF				13	7.0 (0.276)	13.0 (0.512)	18	8.0 (0.315)	18.0 (0.709)
0.022 μF	13	6.5 (0.256)	13.0 (0.512)	13	8.0 (0.315)	13.0 (0.512)	18	9.0 (0.354)	18.0 (0.709)
0.033 μF	13	6.5 (0.256)	13.0 (0.512)	18	6.5 (0.256)	18.0 (0.709)	18	11.0 (0.433)	18.0 (0.709)
0.047 μF	13	7.5 (0.276)	13.0 (0.512)	18	7.0 (0.276)	18.0 (0.709)	18	12.0 (0.472)	18.0 (0.709)
0.068 μF	13	8.0 (0.315)	13.0 (0.512)	18	8.0 (0.315)	18.0 (0.709)	25	11.0 (0.433)	25.0 (0.984)
0.1 μF	18	7.0 (0.276)	18.0 (0.709)	18	10.0 (0.394)	18.0 (0.709)	25	13.0 (0.512)	25.0 (0.984)
0.15 μF	18	8.5 (0.335)	18.0 (0.709)	25	10.0 (0.394)	25.0 (0.984)	30	14.0 (0.551)	30.0 (1.181)
0.22 μF	25	9.0 (0.354)	25.0 (0.984)	25	12.5 (0.492)	25.0 (0.984)	30	16.0 (0.630)	30.0 (1.181)
0.33 μF	25	9.5 (0.374)	25.0 (0.984)	25	13.0 (0.512)	25.0 (0.984)	40	16.0 (0.630)	40.0 (1.575)
0.47 μF	25	11.0 (0.433)	25.0 (0.984)	25	14.0 (0.551)	25.0 (0.984)	40	19.0 (0.748)	40.0 (1.575)
0.68 μF	30	10.0 (0.394)	30.0 (1.181)	30	12.0 (0.472)	30.0 (1.181)	40	21.0 (0.827)	40.0 (1.575)
0.68 μF									
1 μF	25	16.0 (0.630)	25.0 (0.984)	30	14.0 (0.551)	30.0 (1.181)			
1 μF	30	11.0 (0.433)	30.0 (1.181)	40	15.0 (0.591)	40.0 (1.575)			
1.5 μF	30	12.0 (0.472)	30.0 (1.181)	30	16.0 (0.630)	30.0 (1.181)			
1.5 μF	40	14.0 (0.551)	40.0 (1.575)	40	16.0 (0.630)	40.0 (1.575)			
2.2 μF	30	13.0 (0.512)	30.0 (1.181)	30	17.0 (0.669)	30.0 (1.181)			
2.2 μF	40	17.0 (0.669)	40.0 (1.575)	40	18.0 (0.709)	40.0 (1.575)			
3.3 μF	30	16.0 (0.630)	30.0 (1.181)						
3.3 μF	40	20.0 (0.787)	40.0 (1.575)						
4.7 μF									
4.7 μF									
6.8 μF									
6.8 μF									
10 μF									
10 μF									
15 μF									
22 μF									

SG Series



Packaging

BULK: Quantity Per Voltage

Suffix --



Capacitance	Voltage					
	63 V	100 V	250 V	400 V	630 V	1000 V
0.01 μF					2000	1250
0.015 μF					2000	1000
0.022 μF				2000	1250	750
0.033 μF				2000	1250	500
0.047 μF			2000	1500	1250	750
0.068 μF		2000	2000	1250	1000	500
0.10 μF		2000	2000	1250	1000	500
0.15 μF		2000	1500	1000	500	300
0.22 μF	2000	2000	1250	500	300	200
0.33 μF	2000	1250	1000	500	300	150
0.47 μF	2000	1250	750	500	300	150
0.68 μF	2000	1000	750	400	400	100
1 μF	1500	750	750	400	300	
1.5 μF	1500	500	500	400	200	
2.2 μF	900	400	300	300	200	
3.3 μF	800	400	300	150		
4.7 μF	800	400	200			
6.8 μF	250	400	150			
10 μF	250	200	150			

AMMOPACK (upon request)

Suffix EN

\varnothing Capacitor (mm)	5.0 ... 9.0	10.0 ... 14.0	15.0 ... 19.0
Space between capacitors	10 \pm 0.5	15 \pm 0.75	20 \pm 1.0

Capacitance	Voltage					
	63 V	100 V	250 V	400 V	630 V	1000 V
0.01 μF					1000	800
0.015 μF					950	800
0.022 μF				1000	800	700
0.033 μF				1000	1000	400
0.047 μF			1000	900	950	300
0.068 μF		1000	950	800	800	400
0.10 μF		1000	950	950	450	300
0.15 μF		1000	900	800	450	300
0.22 μF	1000	1000	800	700	350	200
0.33 μF	1000	1100	800	700	300	200
0.47 μF	950	950	700	400	300	
0.68 μF	1000	800	450	450	350	
1 μF	1000	400	300	200	300	
1.5 μF	800	400	450	350	200	
2.2 μF	700	300	300	300	200	
3.3 μF	400	300	200	200		
4.7 μF	300	300	400			
6.8 μF	200	200	300			
10 μF	200	200	300			

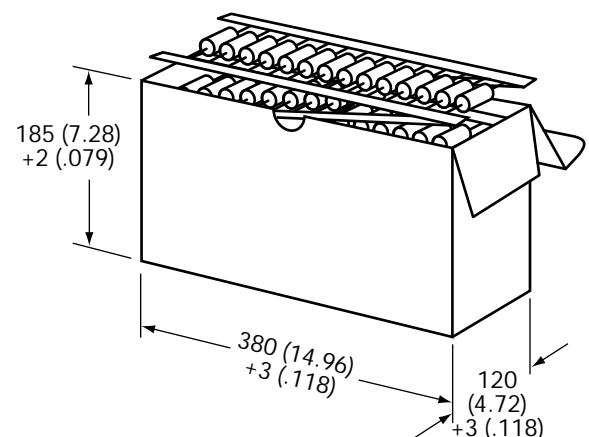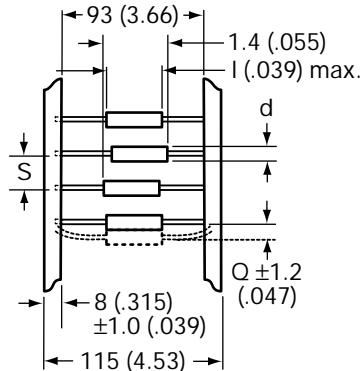

APPLICATIONS


Non-inductive, insulated capacitor. Cylindrical, axial leads, polyester wrapped, epoxy resin sealed.

Some examples of use:

High voltage filtering, TV line recuperation.

SPACELAB qualified.

Important: In frequency the voltages can be limited by the nominal RMS current.

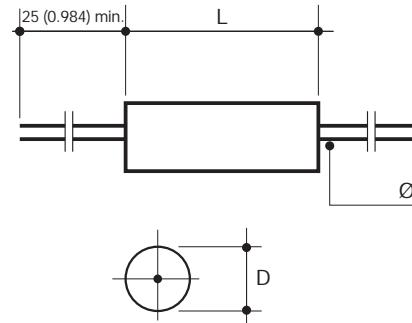

DIMENSIONS:

millimeters (inches)

Size Code	L max.	D max.	$\varnothing^{+10\%}_{-0.05}$	Observations
22	22.0 (0.866)	10.0 ... 17.5 (0.394 ... 0.689)	0.8 (0.031)	$150\text{pF} \leq C_R \leq 100\text{nF}$
36	36.0 (1.417)	10.0 ... 27.5 (0.394 ... 1.083)	1.0 (0.039)	$100\text{pF} \leq C_R \leq 1.5\mu\text{F}$

HOW TO ORDER

ST 36
T

4
T

V
T

0102
T

M
T

--
T

Suffix
Tape and Reel
See page 47

PERFORMANCE CHARACTERISTICS

Climatic category:	40/085/21 - Performance Class 1
Capacitance range:	C_R 100 pF to 1.5 μF
Tolerances on C_R (assoc. series):	$\pm 5\%$, $\pm 10\%$, $\pm 20\%$ (E6) (other values on request)
Nominal voltages:	V_{R-} 630 V to 10,000 V
Test voltage:	$V_e = 1.25 V_{R-}/1 \text{ mn}$
Tangent of loss angle:	D.F. (see page 4)
Insulation resistance:	IR (see page 5)

MARKING

Logo - IE---

Capacitance and tolerance (CEI 62 code)

Nominal voltage

Date of manufacture



2 letter code
(year - month) according
to CEI 62
and available space

NOMINAL VOLTAGE (V_R) AND CAPACITANCE VALUES (C_R) DEPENDING ON THE DIMENSIONS

Size Code	DIMENSIONS: millimeters (inches)			Reference						
				ST						
	630		1,000		1,600		V_{R-}		Range of Capacitances (C_R min. ... max.)	
	Max L	Max D	\emptyset +10% -0.05	630	1,000	1,600	2,500	5,000	6,300	10,000
22	22.0 (0.866)	10.0 (0.394)	0.8 (0.031)	—	15 nF/22 nF	6.8 nF ... 15 nF	2.2 nF ... 4.7 nF	150 pF/220 pF	—	—
	22.0 (0.866)	12.5 (0.492)	0.8 (0.031)	—	33 nF/47 nF	22 nF	6.8 nF	330 pF/470 pF	—	—
	22.0 (0.866)	15.0 (0.591)	0.8 (0.031)	—	68 nF	33 nF	10 nF/15 nF	680 pF	—	—
	22.0 (0.866)	17.5 (0.689)	0.8 (0.031)	—	100 nF	47 nF/68 nF	22 nF	1 nF	—	—
36	36.0 (1.417)	10.0 (0.394)	1.0 (0.031)	—	47 nF	15 nF... 33 nF	6.8 nF ... 10 nF	1.5 nF/2.2 nF	1 nF	100 pF/220 pF
	36.0 (1.417)	12.5 (0.492)	1.0 (0.031)	—	68 nF/100 nF	47 nF	15 nF/22 nF	3.3 nF/4.7 nF	1.5 nF	330 pF
	36.0 (1.417)	15.0 (0.591)	1.0 (0.031)	—	150 nF	68 nF/100 nF	33 nF	6.8 nF	2.2 nF/3.3 nF	470 pF/680 pF
	36.0 (1.417)	17.5 (0.689)	1.0 (0.031)	—	220 nF	150 nF	47 nF	10 nF	4.7 nF	1 nF
	36.0 (1.417)	20.0 (0.787)	1.0 (0.031)	—	330 nF	—	68 nF	15 nF	—	—
	36.0 (1.417)	22.5 (0.886)	1.0 (0.031)	1 μ F	470 nF	220 nF	100 nF	—	6.8 nF	1.5 nF
	36.0 (1.417)	25.0 (0.984)	1.0 (0.031)	1.5 μ F	—	330 nF	—	22 nF	10 nF	2.2 nF
	36.0 (1.417)	27.5 (1.083)	1.0 (0.031)	—	680 nF	—	150 nF	33 nF	—	—

CHARACTERISTIC CURVES

Influence of the frequency on the impedance (room temperature).

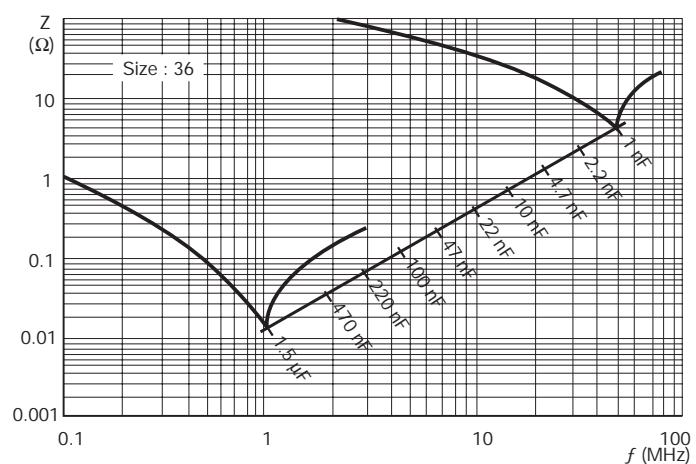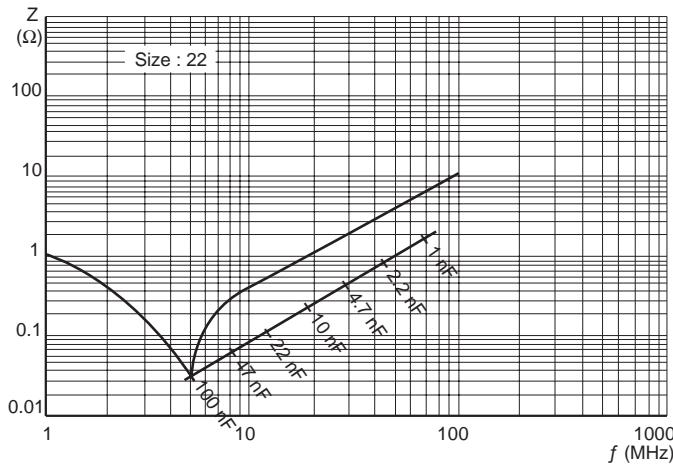

**S4 07/10/15/27 – S8 10/14/18/31
 S9 10/13/18/27/31 – ST 22/36**



Bulk	M.O.Q. = 200
------	--------------

millimeters (inches)

Tape & Reel	Ø capacitor	Quantities	Pitch
Suffix: GA & GB	< 4.0 (0.0 < Ø ≤ 0.157)	1800	10.0 (0.394)
	4 < Ø ≤ 6 (0.161 < Ø ≤ 0.236)	1200	10.0 (0.394)
	6 < Ø ≤ 8 (0.240 < Ø ≤ 0.315)	1000	10.0 (0.394)
	8 < Ø ≤ 9 (0.319 < Ø ≤ 0.354)	800	10.0 (0.394)
Suffix: GA	9 < Ø ≤ 14.5 (0.358 < Ø ≤ 0.571)	300	20.0 (0.787)

Suffix	D	E (ext)
GA	360 (14.173)	90 (3.543)
GB	360 (14.173)	79 (3.110)



Guide for Customer's Specific Requirements

PRESENTATION		ELECTRICAL CHARACTERISTICS	
- Required shape (rectangular or cylindrical case - molded unit, etc.)		Max. and min. operating temperatures	from _____ to _____ °C
		Max. and min. storage temperatures	from _____ to _____ °C
		Capacitance/Tolerance	C _____ μ F _____ %
- Max. dimensions		Max. operating voltages (DC and AC)	V_R DC _____ V_R RMS _____ V (F _____ Hz)
		Max. overvoltages - Duration - Quantity - Frequency	V_S _____ V t _____ ms N _____ F _____ Hz
- Required output terminals type		Test voltage between terminals	V_e DC _____ V V_e RMS _____ V (F _____ Hz)
- One plate connected or not to the case		Test voltage between shorted terminals and case	V_i DC _____ V V_i RMS _____ V (F = 50 Hz)
- Environment		Max. currents - Peak - RMS - Frequency	I_{cr} _____ A I/RMS _____ A F _____ Hz
- Drawing (if necessary)		Voltage gradient	$(dv/dt)_R$ _____ V/ μ s
Marking		Application: Diagram of the circuit	
Standard _____ <input type="checkbox"/>		Other information (resistive (or) inductive coupling, ... Waveforms, etc.)	
Other _____ <input type="checkbox"/>			
Packaging			
Bulk _____ <input type="checkbox"/>			
One tape on reel _____ <input type="checkbox"/>			

Normalized Series and Associated Values

E 6 ±20%	E 12 ±10%	E 24 ±5%	E 48 ±2%	E 96 ±1%
100	100	100	100	100
				102
			105	105
				107
			110	110
	120	120		113
			115	115
				118
			121	121
				124
150	150	150	127	127
				130
			133	133
				137
			140	140
	180	180		143
			147	147
				150
			154	154
				158
220	220	220	162	162
				165
			169	169
				174
			178	178
	270	270		182
			187	187
				191
			196	196
				200
300	240	240	205	205
				210
			215	215
				221
			226	226
	270	270		232
			237	237
				243
			249	249
				255
300	270	270	261	261
				267
			274	274
				280
			287	287
	300	300		294
			301	301
				309

E 6 ±20%	E 12 ±10%	E 24 ±5%	E 48 ±2%	E 96 ±1%
316	330	330	316	316
				324
			332	332
				340
			348	348
	390	390		357
			365	365
				374
			383	383
				392
402	430	430	402	402
				412
			422	422
				432
			442	442
	470	470		453
			464	464
				475
			487	487
				499
511	560	560	511	511
				523
			536	536
				549
			562	562
	620	620		576
			590	590
				604
			619	619
				634
649	680	680	649	649
				665
			681	681
				698
			715	715
	750	750		732
			750	750
				768
			787	787
				806
825	820	820	825	825
				845
			866	866
				887
			909	909
	910	910		931
			953	953
				976

USA

AVX Myrtle Beach, SC
Corporate Offices
Tel: 843-448-9411
FAX: 843-448-1943

AVX Northwest, WA
Tel: 360-669-8746
FAX: 360-699-8751

AVX North Central, IN
Tel: 317-848-7153
FAX: 317-844-9314

AVX Northeast, MA
Tel: 508-485-8114
FAX: 508-485-8471

AVX Mid-Pacific, CA
Tel: 408-436-5400
FAX: 408-437-1500

AVX Southwest, AZ
Tel: 602-539-1496
FAX: 602-539-1501

AVX South Central, TX
Tel: 972-669-1223
FAX: 972-669-2090

AVX Southeast, NC
Tel: 919-878-6357
FAX: 919-878-6462

AVX Canada
Tel: 905-564-8959
FAX: 905-564-9728

Contact:

EUROPE

AVX Limited, England
European Headquarters
Tel: ++44 (0)1252 770000
FAX: ++44 (0)1252 770001

AVX S.A., France
Tel: ++33 (1) 69.18.46.00
FAX: ++33 (1) 69.28.73.87

AVX GmbH, Germany - AVX
Tel: ++49 (0) 8131 9004-0
FAX: ++49 (0) 8131 9004-44

AVX GmbH, Germany - Elco
Tel: ++49 (0) 2741 2990
FAX: ++49 (0) 2741 299133

AVX srl, Italy
Tel: ++390 (0)2 614571
FAX: ++390 (0)2 614 2576

AVX sro, Czech Republic
Tel: ++420 (0)467 558340
FAX: ++420 (0)467 558345

ASIA-PACIFIC

AVX/Kyocera, Singapore
Asia-Pacific Headquarters
Tel: (65) 258-2833
FAX: (65) 350-4880

AVX/Kyocera, Hong Kong
Tel: (852) 2-363-3303
FAX: (852) 2-765-8185

AVX/Kyocera, Korea
Tel: (82) 2-785-6504
FAX: (82) 2-784-5411

AVX/Kyocera, Taiwan
Tel: (886) 2-2516-7010
FAX: (886) 2-2506-9774

AVX/Kyocera, China
Tel: (86) 21-6249-0314-16
FAX: (86) 21-6249-0313

AVX/Kyocera, Malaysia
Tel: (60) 4-228-1190
FAX: (60) 4-228-1196

Elco, Japan
Tel: 045-943-2906/7
FAX: 045-943-2910

Kyocera, Japan - AVX
Tel: (81) 75-604-3426
FAX: (81) 75-604-3425

Kyocera, Japan - KDP
Tel: (81) 75-604-3424
FAX: (81) 75-604-3425

