

JTB05 Series



- 4:1 Input Range
- DIP-24 Metal Package
- Operating Temperature -25 °C to +100 °C
- Input Pi Filter
- Fully Regulated Single & Dual Outputs
- 1500 VDC Isolation
- Continuous Short Circuit Protection

Specification

Input

- Input Voltage Range • 24 V (9-36 VDC)
48 V (18-72 VDC)
- Input Current (no load) • See table
- Input Filter • Pi network

Output

- Output Voltage • See tables
- Output Voltage Balance • $\pm 1\%$ max, dual output models
- Initial Set Accuracy • $\pm 2\%$ max
- Start Up Rise Time • 3 ms max
- Line Regulation • $\pm 0.5\%$ max from high line to low line
- Load Regulation • $\pm 0.5\%$ max single output models,
 $\pm 1.0\%$ max dual output models
- Cross Regulation • $\pm 2.2\%$ on dual output models
- Transient Response • $< 1.0\%$ max deviation, recovery to within
1% in 200 μ s for a 50% load change
- Ripple & Noise • 100 mV or 1.0% pk-pk, whichever is
greater, 20 MHz BW
- Overcurrent Protection • $> 150\%$ constant power
- Short Circuit Protection • Continuous with auto recovery
- Temperature Coefficient • $\pm 0.05/^\circ\text{C}$ max

General

- Efficiency • See table
- Isolation • 1500 VDC Input to Output
(1000 M Ω /80 pF)
- Switching Frequency • Variable 200-320 kHz
- MTBF • 1,000 kHrs to MIL-HDBK-217F

Environmental

- Operating Temperature • -25 °C to +100 °C (see derating curve)
- Case Temperature • +100 °C max
- Storage Temperature • -40 °C to +100 °C
- Shock • 30 g, half sine wave 18 ms pulse applied
3 times on each of 6 axes
- Vibration • 5-500 Hz, 3 g, for 10 mins on each
of 3 axes

EMC

- Emissions • EN55022, level A conducted & radiated
with external components - contact
technical sales
- ESD Immunity • EN61000-4-2, level 2 Perf Criteria A
- Radiated Immunity • EN61000-4-3, 3 V/m Perf Criteria A
- Conducted Immunity • EN61000-4-6, 3 V rms Perf Criteria A

Models and Ratings

Input Voltage ⁽¹⁾	Output Voltage	Output Current	Input Current ⁽²⁾		Efficiency	Model Number ⁽³⁾
			No Load	Full Load		
9-36 VDC	3.3 VDC	1000 mA	15.0 mA	191 mA	72%	JTB0524S3V3
	5.0 VDC	1000 mA	15.0 mA	267 mA	78%	JTB0524S05
	12.0 VDC	470 mA	15.0 mA	294 mA	80%	JTB0524S12
	15.0 VDC	400 mA	15.0 mA	313 mA	80%	JTB0524S15
	±5.0 VDC	±500 mA	25.0 mA	267 mA	78%	JTB0524D05
	±12.0 VDC	±230 mA	25.0 mA	288 mA	80%	JTB0524D12
	±15.0 VDC	±190 mA	25.0 mA	297 mA	80%	JTB0524D15
18-72 VDC	3.3 VDC	1000 mA	7.5 mA	100 mA	70%	JTB0548S3V3
	5.0 VDC	1000 mA	7.5 mA	134 mA	78%	JTB0548S05
	12.0 VDC	470 mA	7.5 mA	149 mA	79%	JTB0548S12
	15.0 VDC	400 mA	12.0 mA	157 mA	80%	JTB0548S15
	±5.0 VDC	±500 mA	12.0 mA	135 mA	77%	JTB0548D05
	±12.0 VDC	±230 mA	12.0 mA	146 mA	79%	JTB0548D12
	±15.0 VDC	±190 mA	12.0 mA	149 mA	80%	JTB0548D15


Notes

- Nominal input voltage 24 or 48 VDC.
- Input current is at nominal input voltage.
- Surface mount versions with plastic case available in OEM quantities.

Mechanical Details

All dimensions are in inches (mm)

Weight: 0.04 lbs (20 g) approx.

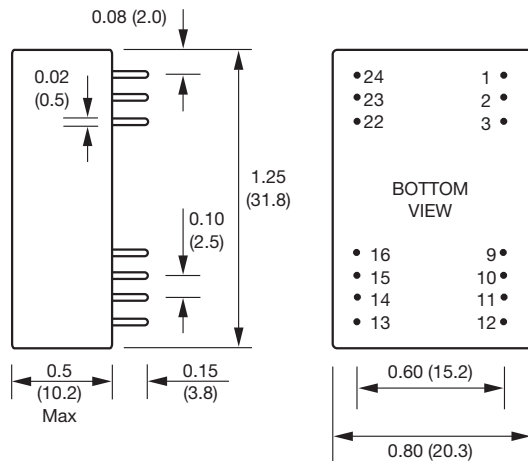

PIN CONNECTIONS		
Pin	Single Output	Dual Output
1	No pin	No pin
2	-V input	-V input
3	-V input	-V input
9	N/C	Common
10	N/C	N/C
11	N/C	-V output
12	No pin	No pin
13	No pin	No pin
14	+V output	+V output
15	N/C	N/C
16	-V output	Common
22	+V input	+V input
23	+V input	+V input
24	No pin	No pin

Derating Curve

