

## Surface Mount, Multi Layer High Frequency Ceramic Inductors



### MECHANICAL SPECIFICATIONS

**Solderability:** 90 % coverage after 5 s dip in 235 °C solder following 60 s preheat at 120 °C and type R flux dip

**Resistance to Solder Heat:** 10 s in 260 °C solder, after preheat and flux above

**Terminal Strength:** 0.3 kg (0.66 lbs) for 30 s

**Beam Strength:** 0.3 kg (0.66 lbs)

**Flex:** 0.0788" [2.0 mm] min. mounted on 0.063" [1.6 mm] thick PC board

### FEATURES

- High reliability
- Surface mountable
- Reflow or wave solderable
- Tape and reel packaging per EIA specifications: 4000 pieces on 7" reel
- Compliant to RoHS directive 2002/95/EC



**RoHS**  
COMPLIANT

### ENVIRONMENTAL SPECIFICATIONS

**Operating Temperature:** - 55 °C to + 125 °C

**Thermal Shock:** 100 cycles, - 40 °C to + 85 °C


**Humidity:** + 40 °C, 85 % RH, 1000 h at full rated current

**Load Life:** 85 °C for 1000 h at full rated current

### STANDARD ELECTRICAL SPECIFICATIONS

PART NUMBER	IND. (nH)	TOL.	TEST FREQUENCY (MHz)	Q MIN.	Q TYPICAL			SRF (MHz)		DCR MAX. (Ω)	RATED DC CURRENT MAX. (mA)
					100 MHz	500 MHz	1000 MHz	MIN.	TYP.		
ILC0603ER1N0S	1.0	0.3 nH	100	8	15	43	63	10 000	15 000	0.05	300
ILC0603ER1N2S	1.2	0.3 nH	100	8	14	38	55	10 000	14 000	0.05	300
ILC0603ER1N5S	1.5	0.3 nH	100	8	11	28	40	6000	13 000	0.10	300
ILC0603ER1N8S	1.8	0.3 nH	100	8	10	24	35	6000	11 000	0.10	300
ILC0603ER2N2S	2.2	0.3 nH	100	8	14	35	40	6000	10 000	0.10	300
ILC0603ER2N7S	2.7	0.3 nH	100	10	12	29	45	6000	7000	0.10	300
ILC0603ER3N3S	3.3	0.3 nH	100	10	16	40	47	4000	5900	0.12	300
ILC0603ER3N9S	3.9	0.3 nH	100	10	11	25	35	3500	4500	0.14	300
ILC0603ER4N7S	4.7	0.3 nH	100	10	11	26	35	3500	4500	0.16	300
ILC0603ER5N6S	5.6	0.3 nH	100	10	15	36	46	3500	4000	0.18	300
ILC0603ER6N8J	6.8	5 %	100	10	15	38	47	3000	3600	0.22	300
ILC0603ER8N2J	8.2	5 %	100	10	13	31	41	3000	3500	0.24	300
ILC0603ER10NJ	10	5 %	100	12	15	34	47	2800	3000	0.26	300
ILC0603ER12NJ	12	5 %	100	12	12	27	49	2000	2500	0.28	300
ILC0603ER15NJ	15	5 %	100	12	15	30	36	2000	2200	0.32	300
ILC0603ER16NJ	18	5 %	100	12	15	28	31	1800	2000	0.35	300
ILC0603ER22NJ	22	5 %	100	12	17	34	36	1800	1900	0.40	300
ILC0603ER27NJ	27	5 %	100	12	15	31	30	1500	1700	0.45	300
ILC0603ER33NJ	33	5 %	100	12	15	28	24	1200	1500	0.55	300
ILC0603ER39NJ	39	5 %	100	12	14	31	28	1100	1300	0.60	300
ILC0603ER47NJ	47	5 %	100	12	17	31	28	900	1300	0.70	300
ILC0603ER56NJ	56	5 %	100	12	19	34	26	900	1200	0.75	300
ILC0603ER68NJ	68	5 %	100	12	17	30	20	700	1000	0.85	300
ILC0603ER82NJ	82	5 %	100	12	16	29	18	600	1000	0.95	300
ILC0603ERR10J	100	5 %	100	12	16	24	3	600	800	1.00	300
ILC0603ERR12J	120	5 %	50	8	17	21	-	500	800	1.20	300
ILC0603ERR15J	150	5 %	50	8	19	20	-	500	700	1.20	300
ILC0603ERR18J	180	5 %	50	8	18	13	-	400	600	1.30	300
ILC0603ERR22J	220	5 %	50	8	18	-	-	400	500	1.50	300
ILC0603ERR27J	270	5 %	50	8	19	-	-	350	490	1.60	300


### DIMENSIONS in inches [millimeters]

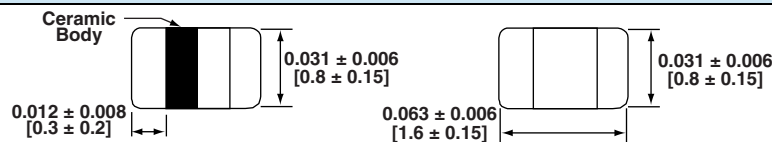

### DESCRIPTION

ILC-0603	10 nH	± 10 %	ER	e3
MODEL	INDUCTANCE VALUE	INDUCTANCE TOLERANCE	PACKAGE CODE	JEDEC LEAD (Pb)-FREE STANDARD

### GLOBAL PART NUMBER





## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.