



Torque screwdriver with scale, adjustable, MA500-1 - MAL500-3

Micro-Adjustable Torque Screwdriver.

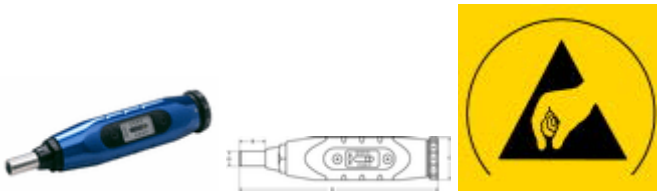
Comfortable shape and user friendly designed grip. Cam-over torque limiting clutch for repeatability and accuracy. Easy-to-read window scale. Easy-to-use adjustment knob for precise settings.






Accuracy: $\pm 6\%$ according DIN/ISO 6789 EN 26789/1994.

1/4" hexagon Non-magnetic spring loaded bit holder to avoid damaging sensitive equipment or components in electronics applications. (1/4" 6.3 DIN 3126, ISO 1174).

An adapter gives the option to use 1/4" sockets (1/4" 6.3 DIN 3120, ISO 1174)

All models are certified to be ESD safe (IEC 61340-5-1 och EN 100015-1).



					A mm	B mm	C mm	D mm	
MA500-1	0112395	1	1/4	10-80 cNm	138	18.2	28	9.6	195
MA500-2	0112401	1	1/4	40-200 cNm	157	18.2	28	9.6	260
MA500-3	0112418	1	1/4	50-450 cNm	171	18.2	32	9.6	306
MAL500-1	0112593	1	1/4	20-100 in.ozs.	138	18.2	28	9.6	195
MAL500-2	0112609	1	1/4	3-15 in.lbs.	157	18.2	28	9.6	260
MAL500-3	0112616	1	1/4	5-40 in.lbs.	171	18.2	32	9.6	306