


**RIGHT ANGLE MALE MMS - 200 MM**

**R285.001.021**

**2/50 S-BR CABLE**

Series : **CORD-SPECIF**

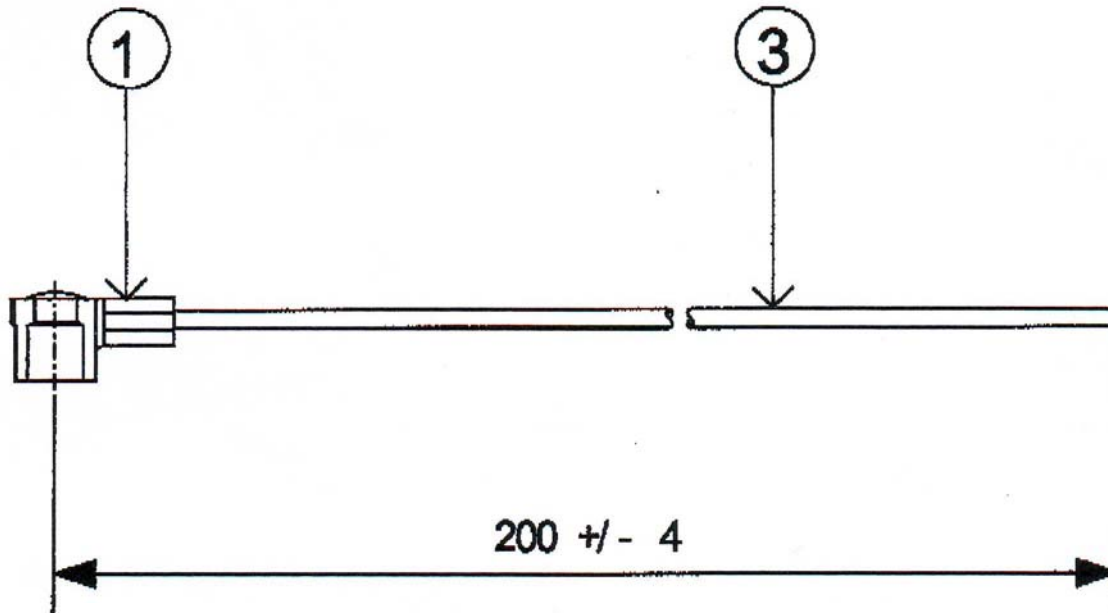

All dimensions are in mm.



- \* 1 \* Connector A : **R209.353.000**
  - \* 2 \* Connector B : **-**
  - \* 3 \* Cable : **C291.145.007**
- Type : **CAB HF 2/50 RG 178 BROWN**

**ELECTRICAL CHARACTERISTICS**

Impedance		50 Ω
Frequency		0-6 GHz
Operating temperature		-40/+90 °C
VSWR	NA +	0.000 x F(GHz) Maxi
Insertion loss		NA √F(GHz) dB Maxi
Voltage rating		50 Veff Maxi
Dielectric withstanding voltage		250 Veff mini
Insulation resistance		500 MΩ mini

**SPECIFICATION**

Weight	1.900 g
Cable	20 N mini
Others :	-



Edition : 0517 B

Design changes may be in order to improve the product.