
Slit Flat Twist'N'Flat Planar Cable

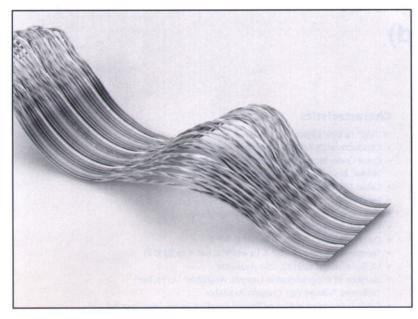

Characteristics

- .050" (+/- .005") Pitch
- Conductors: 28 AWG, 7/36 strand tinned copper
- Color: brown, red, orange, yellow, green, blue, violet, gray, white, black (repeat) - tan common
- Cable Thickness: .042" +/- .003"
- Insulation: PVC, flame retardant VW-1
- · Laminate: clear PVC, self-extinguishing
- Voltage Rating: 300V
- Current Rating: 1 amp nominal @ 10°C
- * Temperature Rating: -20°C to 80°C (14°F to 176°F)
- * UL Style: #2697, CSA available, 105°C UL style available
- # of Programmable Lengths Available: up to five different combinations of flat and five different combinations of twisted pair lengths available (total of 10 combined) within one cable
- Length Tolerances: slit dimensions have a tolerance of +/- 0.125" in lengths of 6" or less; +/- 0.250 in lengths greater than 6", and +/0 0.250 in programmed (multiple) lengths.
- · Single Program:

Minimum Twisted Pair Length: 5"
Minimum Flat Length: 1"

Multiple Program:

Minimum Twisted Pair Length: 6" Minimum Flat Length: 1.5"

PROGRAMMABLE: 1000' MINIMUM ORDER QUANTITY

Ordering Information:

Fax No. ()

Comments:

Overall put-up length:	Measure in: feet	□ meters □		
Slit: Between each pair	AWG: Strand: Spacing:		(68 Maxin (34 twiste	num)
Slit length measure in: inches	mm 🗆			
Indicate each unslit flat and slit b Write in "repeat", if appropriate.	etween pairs length in sp	paces below.		
Flat Slit Between Pairs	Flat	Slit Between Pairs	Flat	Slit Between Pairs
Customer Information:			Factory Part Number (will be assigned)

Date _____
This request for pricing is made by:

Name _____
Title ____

Company ____
Address ____
City _____ State _____ Zip ____
Phone No. (_____)

Amphenol SPECTRA: STRIP

Copy & Fax to: Cable Marketing Manager

Fax: (203) 281-5872 Phone: (203) 281-3200

(800) 846-6400