




# INDIVIDUAL DATA SHEETS

## P-240C C size (KR26/50) Type: N

Dimensions (with tube) (mm)

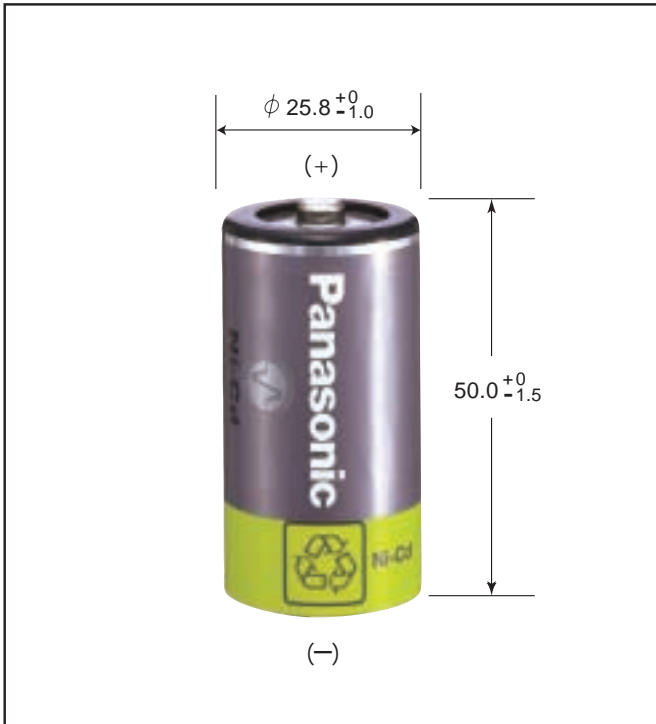


## Typical Charge Characteristics

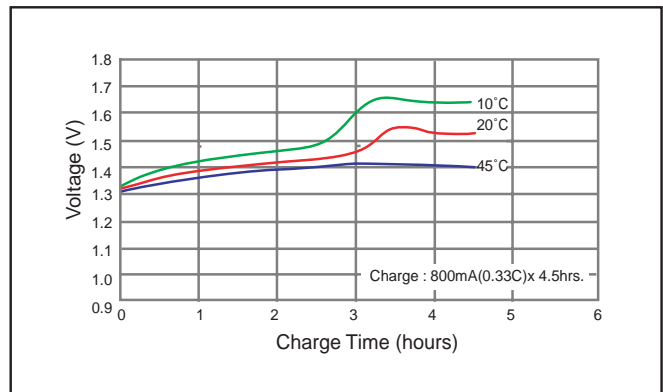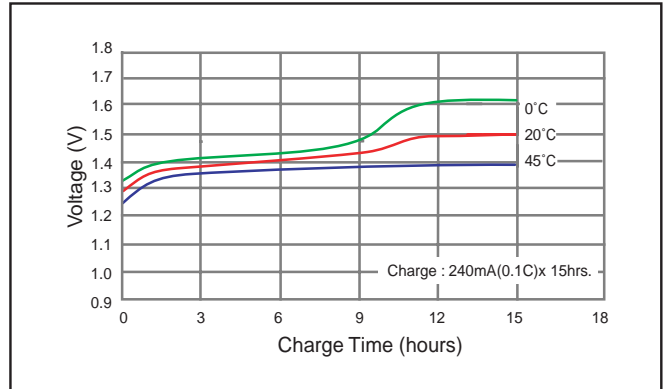

## Specifications

Diameter	25.8 +0 / -1.0 mm
Height	50.0 +0 / -1.5 mm
Approximate Weight	75g

## Typical Discharge Characteristics

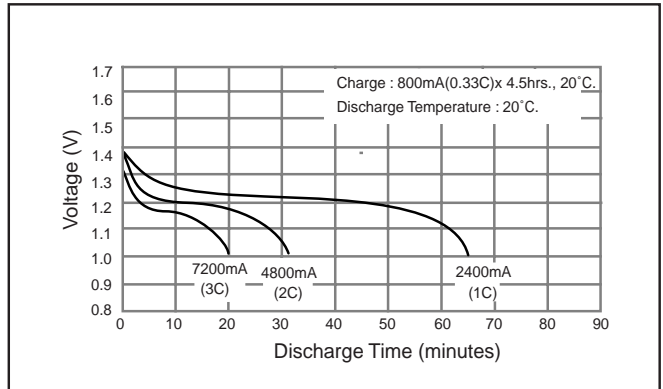

Nominal Voltage		1.2V		
Discharge Capacity*	Average**	2600mAh		
	Rated (Min.)	2400mAh		
Approx. Internal impedance at 1000Hz at charged state.		6mΩ		
Charge	Standard	240mA (0.1C) x 16hrs.		
	Short Time	800mA (0.33C) x 4.5hrs.		
	Trickle	Max Current	120mA (0.05C) x 30hrs. and over	
		Min Current	80mA (0.033C) x 45hrs. and over	
Ambient Temperature	Charge	Standard	0°C to 45°C	
		Short Time	10°C to 45°C	
	Discharge		-20°C to 65°C	
	Storage	< 2 years	-20°C to 35°C	
< 6 months		-20°C to 45°C		

\* 0.2C discharge capacity after charging at 0.1C for 16 hours.

\*\* For reference only.

Battery performance and cycle life are strongly affected by how they are used. In order to maximize battery safety, please consult Panasonic when determining charge / discharge specs, warning label contents and unit design.