

Midget Fuses

Supplementary Overcurrent Protection



KLK Fuses

FAST-ACTING ■ 600 VAC

Fast-acting, high-interrupting capacity, current-limiting type fuse. Especially suited for control circuits, street lighting, H.I.D. lighting, computers, and other applications without high inrush currents.

Voltage Rating: 600 Volts AC
500 Volts DC

Interrupting Rating: UL Listed 100,000 amperes rms symmetrical
(Capable of 200,000 amperes)

Ampere Ratings:

1/10	1	4	10
1/8	1 1/2	5	12
3/10	2	6	15
1/4	2 1/2	7	20
3/10	3	8	25
1/2	3 1/2	9	30
3/4			

Approvals: UL Listed per UL 248 (formerly 198G) (File No. E10480) and CSA Certified (File No. LR29862): 3/10 – 30A. Versions available to meet MIL Spec MIL-F-5160/60, QPL F60C: Contact factory.

Dimensions: 13/32" x 1-1/2"

Example part number (series & amperage): KLK 1-1/2



KLKD Fuses

FAST-ACTING ■ 600 VAC/DC

Fast-acting, high-interrupting capacity, current-limiting type fuse. Especially suited for DC control circuits, street lighting, H.I.D. lighting, computers, and other applications.

Voltage Rating: 600 Volts AC/DC

Interrupting Rating: AC: 100,000 amperes rms symmetrical; DC: 10,000 amperes

Ampere Ratings:

1/10	1	4	10
1/8	1 1/2	5	12
3/10	2	6	15
1/4	2 1/2	7	20
3/10	3	8	25
1/2	3 1/2	9	30
3/4			

Approvals: UL Listed per UL 248 (formerly 198G) (File No. E10480) and CSA Certified (File No. LR29862): 3/10 - 30A.

Dimensions: 13/32" x 1-1/2"

Example part number (series & amperage): KLKD 30



FLM Fuses

TIME-DELAY ■ 250 VAC

Use FLM 250 volt time-delay fuses to protect control circuit transformers, solenoids, and other circuits with high inrush currents. Excellent for supplemental protection of small motors. For motor **branch-circuit** protection, See Class CC fuses.

Voltage Rating: 250 Volts AC

Interrupting Rating: AC: 10,000 amperes rms symmetrical.


Ampere Ratings:

1/10	1 1/8	3	7
15/100	1 1/4	3 3/10	8
3/10	1 3/10	3 1/2	9
1/4	1 1/2	4	10
3/10	1 3/10	4 1/2	12
1/10	1 1/10	5	15
1/2	2	5 5/10	20
3/10	2 1/4	6	25
3/10	2 1/2	6 1/4	30
1	2 2/10		

Approvals: UL Listed per UL 248 (formerly 198G) (File No. E10480). CSA Certified to Spec 59.2 (File No. LR29862).

Dimensions: 13/32" x 1-1/2"

Example part number (series & amperage): FLM 15

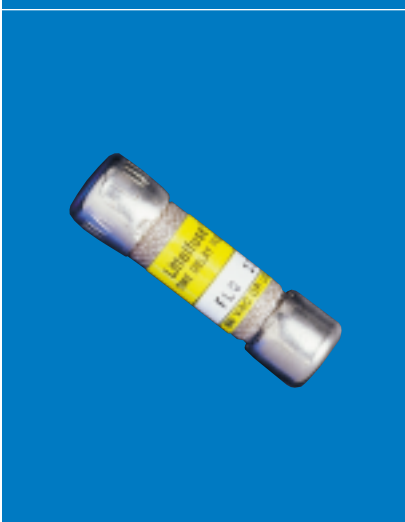

FLQ Fuses

TIME-DELAY ■ 500 VAC

These 500 volt time-delay fuses provide excellent supplemental protection of control power transformers, solenoids, and circuits with high inrush currents. UL and CSA 500 volt ratings permit use on 480 volt circuits. FLQ fuses also provide supplemental protection to small motors. For motor **branch-circuit** protection, see Class CC fuses.

Voltage Rating: 500 Volts AC

Interrupting Rating: 10,000 amperes rms symmetrical

Ampere Ratings:

1/10	3/10	8
1/8	1	9
15/100	1 1/8	10
3/16	1 1/4	12
3/10	1 1/2	14
1/4	1 3/10	15
3/10	2	20
3/10	2 1/4	25
1/2	2 1/2	30
3/10	3	

Approvals: UL Listed per UL 248 (formerly 198G) (File No. E10480). CSA Certified to Spec 59.2 (File No. LR29862).

Dimensions: 13/32" x 1-1/2"

Example part number (series & amperage): FLQ 1/2

RECOMMENDED FUSE BLOCKS

L60030M series. Refer to Fuse Block section of this catalog for additional information.

Midget Fuses

Supplementary Overcurrent Protection



BLN Fuses

FAST-ACTING ■ 250 VAC

Fiber tube, 250 volt BLN fuses provide low-cost protection for military applications and control circuits.

Voltage Rating: 250 Volts AC

Interrupting Rating: 10,000 amperes rms symmetrical

Ampere Ratings:

1	5	10	20
2	6	12	25
3	8	15	30
4			

Approvals: UL Listed per UL 248 (formerly 198G) (File No. E10480). CSA Certified to Spec 59.2 (File No. LR29862). Versions available to meet MIL Spec MIL-F-15160/9, QPL F09A: Contact factory.

Dimensions: 13/32" x 1-1/2"

Example part number (series & amperage): BLN 30



BLF Fuses

FAST-ACTING ■ 125/250 VAC

Laminated tube BLF fuses are the lowest price midget fuse. They are suitable for control circuit and instrument protection in dry locations.

Voltage Ratings: 250 Volts AC: 1/2 – 15 amperes; 125 Volts AC: 20 – 30 amperes

Interrupting Rating: 10,000 amperes rms symmetrical

Ampere Ratings:

1/2	3	7	15
1	4	8	20
1 1/2	5	9	25
2	6	10	30
2 1/2	6 1/4	12	

Approvals: UL Listed per UL 248 (formerly 198G) (File No. E10480). CSA Certified to Spec 59.2 (File No. LR29862).

Dimensions: 13/32" x 1-1/2"

Example part number (series & amperage): BLF 5



BLS Fuses

FAST-ACTING ■ 250/600 VAC

BLS fuses are 1-3/8" long in contrast to other midget fuses which are 1-1/2". They provide space-saving, low-cost, protection to street lighting, metering, control and electronic circuits.

Voltage Rating: 600 Volts AC: 2/10 – 5 amperes; 250 Volts AC: 6 – 10 amperes

Interrupting Rating: 10,000 amperes rms symmetrical

Ampere Ratings:

2/10	1	2	6
1/10	1 1/2	3	7
1/2	1 1/10	4	8
3/4	1 1/10	5	10
5/10			

Approvals: UL Listed per UL 248 (formerly 198G) (File No. E10480): 1/2 – 5 amps. CSA Certified to Spec 59.2 (File No. LR29862): 1/2 – 5 amps.

Dimensions: 13/32" x 1-3/8"

Example part number (series & amperage): BLS 10



FLA Fuses

TIME-DELAY ■ 125 VAC

FLA fuses are 125 volt, *pin-indicating* time-delay fuses for protection of control circuit transformers, solenoids, and other circuits with high inrush currents. Metal indicating pin "pops-out" when fuse opens. Pin gives visual indication of open fuse. Use FLA fuses in conjunction with special fuseblocks to operate mechanical signal switches or energize alarm circuits. Fuses rated 12 amperes and above have dual-tube construction.

Voltage Rating: 125 Volts AC

Interrupting Rating: 10,000 amperes rms symmetrical

Ampere Ratings:


1/10	1 1/2	2 1/10	6 1/4
1 1/100	1 1/4	3	7
3/10	1 1/10	3 3/10	8
1/4	1 1/2	3 1/2	10
3/10	1 1/10	4	12 *
1/2	1 1/10	4 1/2	15 *
1/2	2	5	20 *
5/10	2 1/4	5 1/10	25 *
5/10	2 1/2	6	30 *
1			

Approvals: UL Listed per UL 248 (formerly 198G) (File No. E10480). CSA Certification pending.

Dimensions: 13/32" x 1-1/2"

* Note: Dual tube construction

Example part number (series & amperage): FLA 15



RECOMMENDED FUSE BLOCKS

L60030M series. Refer to Fuse Block section of this catalog for additional information.



Midget Fuses

Supplementary Overcurrent Protection

