
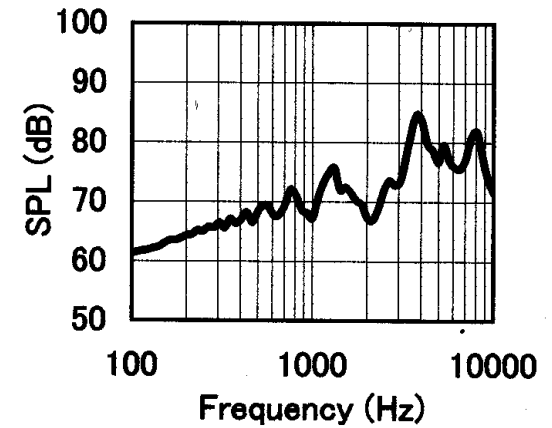


### SPECIFICATIONS

PARAMETERS	VALUES	UNITS
Maximum Operating Voltage	25	V <sub>p-p</sub>
Rated Voltage	5	V <sub>p-p</sub>
Current Consumption (max.)	3	mA
Resonant Frequency	4100	Hz
Typ. Sound Pressure Level @ 10 cm	80	dBA
Static Capacitance @ 1 kHz	16±30%	nF
Operating Temperature	-20 ~ +70	°C
Storage Temperature	-30 ~ +80	°C
Weight	0.5	g

### REVISIONS

LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	07/03/01	

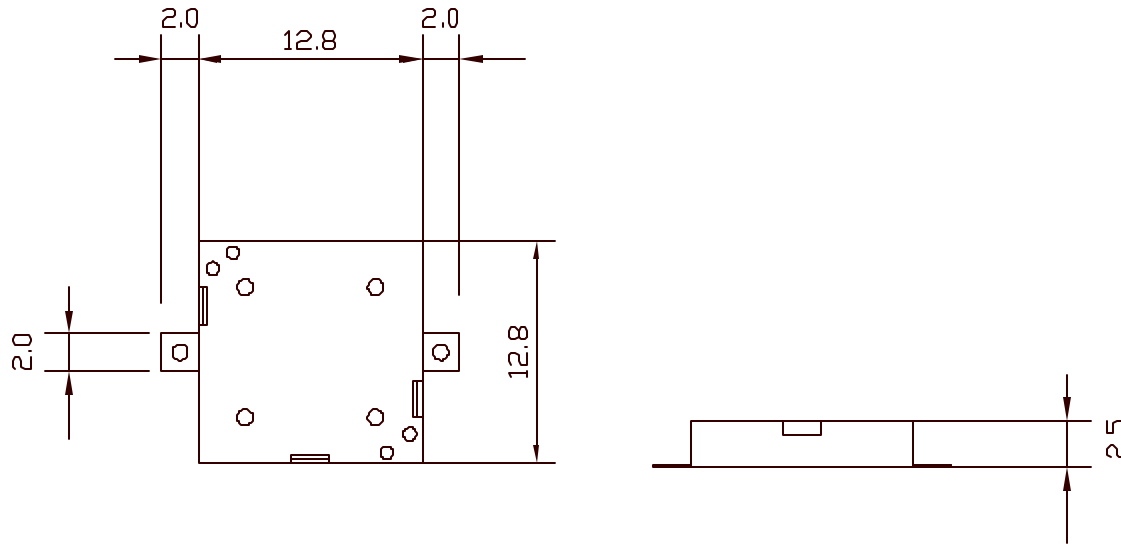

#### NOTES:

- ALL DIMENSIONS ARE IN MILLIMETERS.
- SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN MILLIMETERS  
TOLERANCES ARE:  
FRACTIONS DECIMALS ANGLES  
± .XX ± X.X ±  
XXX ±

APPROVALS	DATE
DRAWN <i>RABL</i>	07/01
CHECKED	
APPROVED <i>S.J.</i>	07/03/01
DO NOT SCALE DRAWING	

DRAWING NAME  
SMT1325



Dayton, Ohio

SURFACE MOUNT PIEZO TRANSDUCER  
SMT-1325

SIZE	MATERIAL	DRAWING NO.
A		SMT1325.DWG
SCALE	N/A	MAX. WT.
		SHEET 1 OF 1