


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS				DOC. NO.	SPC-F005	* Effective:	12/21/98	* DCP No.	680
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRD	DATE	
788	A	RELEASED	HYO	12/12/00	JC	12/20/00	DJC	2/13/01	

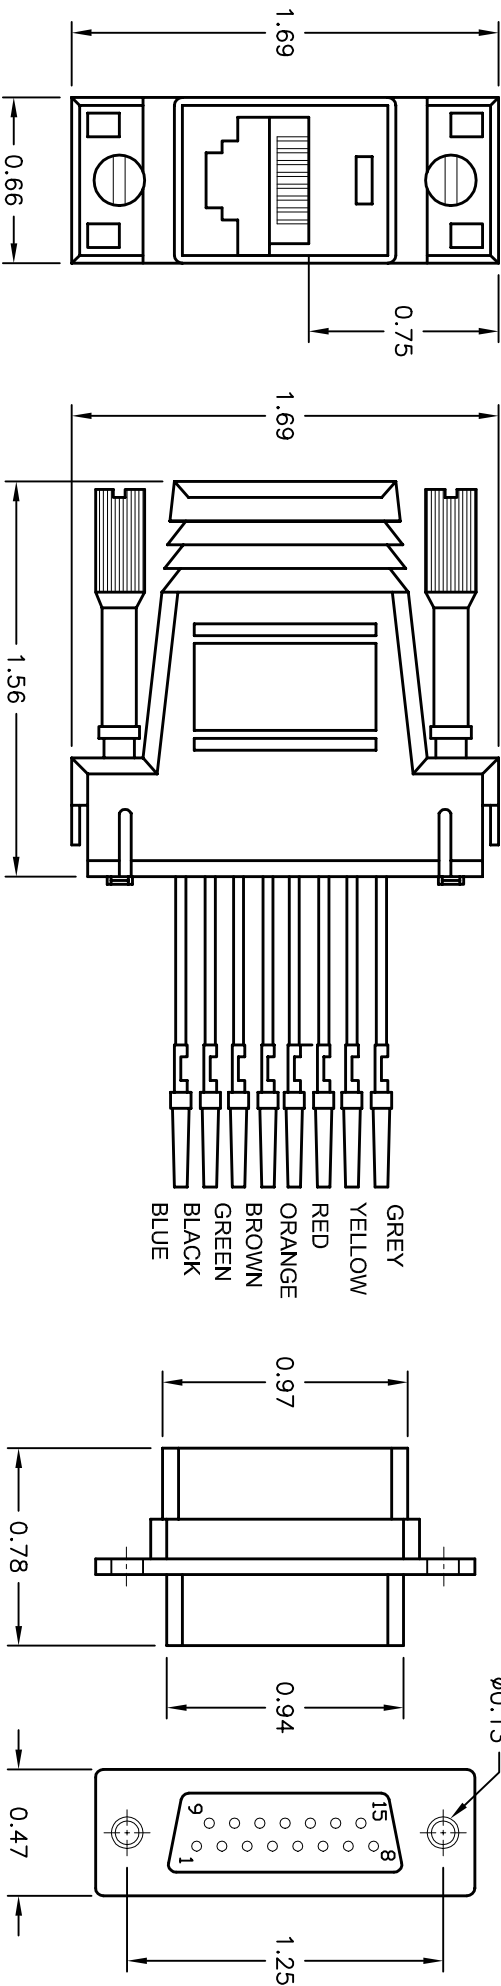

SPECIFICATIONS:

1. CONNECTOR A: MODULAR 8 CONDUCTOR
2. CONNECTOR B: DB-15 FEMALE RS232 INPUT/OUTPUT CONNECTOR
3. FOR SPECIFIC WIRING APPLICATIONS ALL TOLERANCES ARE ± 0.20 UNLESS OTHERWISE SPECIFIED

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, WE MAKE NO WARRANTY, REPRESENTATION OR STATEMENT OF FACT OR INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.



SPC TECHNOLOGY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.	DRAWN BY:	DATE:
	HISHAM ODISH	12/12/00
	CHECKED BY:	DATE:
	JOHN COLE	12/20/00
	APPROVED BY:	DATE:
	DANIEL CAREY	2/13/01

DRAWING TITLE:			DB15(F)/R45(8c) ADAPTER		
SIZE	DWG. NO.	ELECTRONIC FILE		REV	
A	8588-0201	52N9491.DWG		A	
SCALE:	NTS	U.O.M.:	INCHES	SHEET:	1 OF 1