



RC-50-J-DE

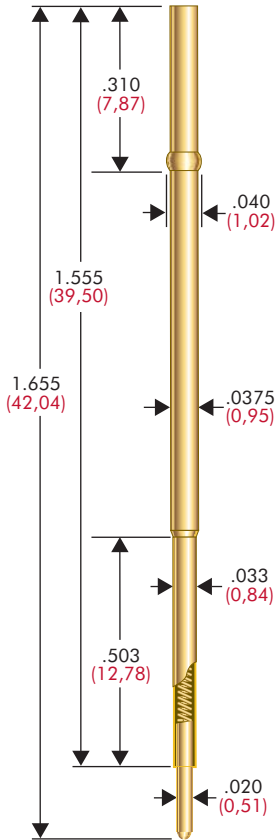

For more information, see page 63.

SCO ROTATOR[®]

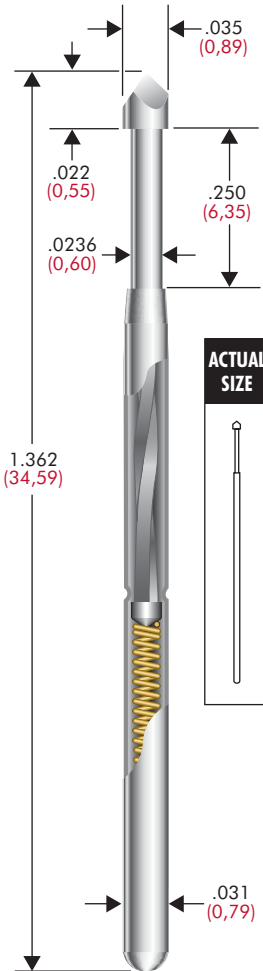

PROBE SPECIFICATIONS


Minimum Centers: .050 (1,27)
 Current Rating: 3 amps continuous
 Spring Force: 3.7oz. @ .170 (4,32) travel
 Contact Resistance: <17 mΩ
 Maximum Travel: .250 (6,35)
 Working Travel: .170 (4,32)
 Rotates: 85° @ .170 (4,32) travel

Rated Force oz (gms)	Preload oz (gms)
3.7 (105)	1.5 (42)

MATERIALS

Barrel: DuraGold[®]
 Spring: Music wire, gold plated
 Plunger: Full-hard beryllium copper, Duralloy[™]

BeCu PLUNGERS



HOW TO ORDER: SPRING CONTACT PROBE

SC	0	TL	3.7	RT
SERIES	SIZE	TIP STYLE	SPRING FORCE	PLATING OPTIONS

For more information on Rotators, see page 124