

5

4

3

2



1

SPECIFICATION


Mating Cycles	500
Filter type	C
Capacitance	47pf±20%
Working Voltage	100V
Current Rating	7,5Amp
Insulation Resistance	>1GΩ



Minimum Insertion Loss

FREQUENCY (MHz)	ATTENUATION dB
5	-
10	-
50	-
100	-
500	30dB
1000	35dB

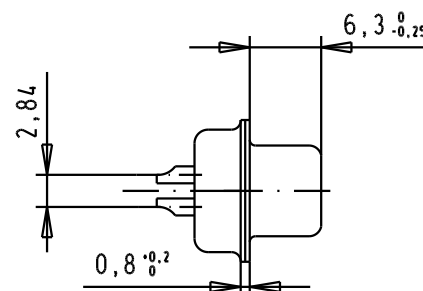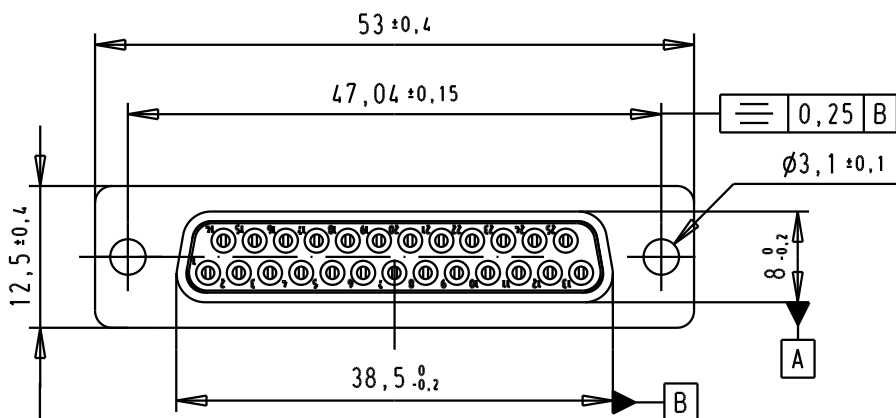

Solder bucket for AWG 20

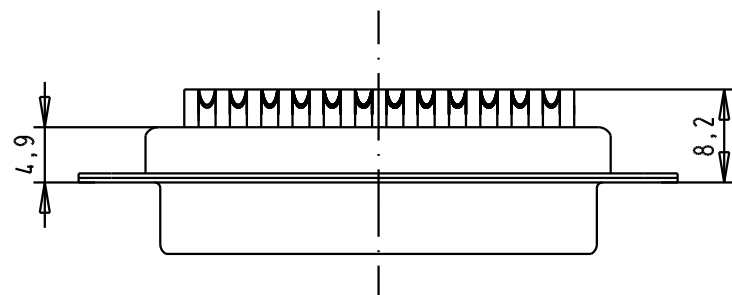

			Dat.		Name		 All Dim. in mm Orig. Size DIN A 4	D-Sub, female, straight, 25 Poles, with turned solder bucket and hole	Me?Ms Lab/ Scale 1.5:1
			Detail.	8-JUL-02		CV			
			Insp.						
			Stand.						
31897	17/05/04	AF	HARTING EURL F-95972 Paris					TB 09643117210	Blatt/ Page 1 / 1
31058	8-Jul-02	CV							
Mod.	Dat.	Name							

D

C

B

A