



DATE	REV	DESCRIPTION	BY	CHKD

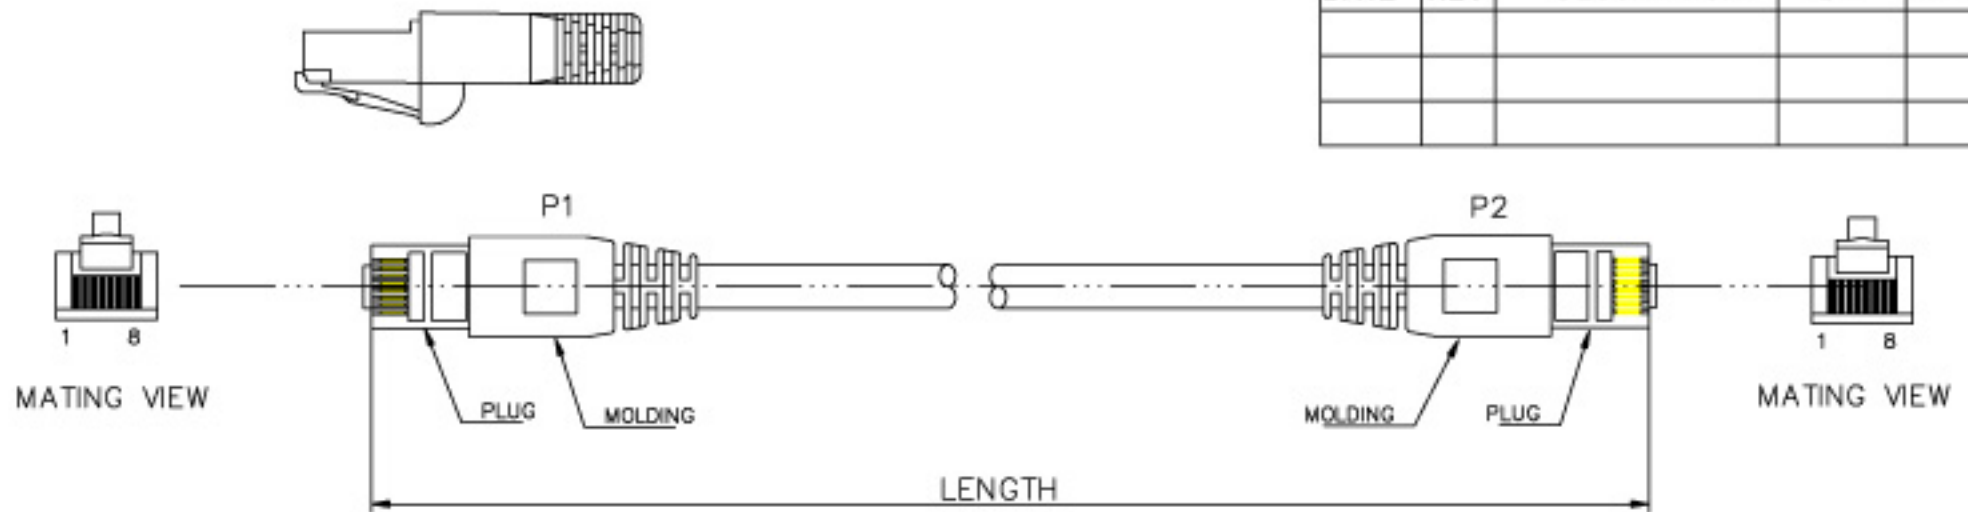

Marking: **CAT.6 UTP 24AWG×4P PATCH TYPE LSOH IEC 332.3.C**  
**-ISO/IEC 11801 Ed. 2 & EN 50288 & TIA/EIA-568-B.2-1 3P VERIFIED**

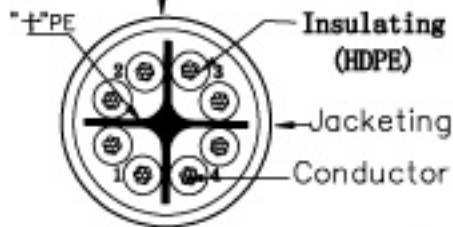


orange 2	green 3
white/orange	white/green
blue 1	brown 4
white/blue	white/brown

PA/R	P1(T568B)	WIRE	P2(T568B)
1	1	WHT/ORG	1
	2	ORG	2
2	3	WHT/GRN	3
	6	GRN	6
3	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8

<b>Conductor</b>	Base Copper 24AWG 16.1964±0.015mm
<b>Insulation</b>	Thickness(MIN) at any point: 1.5mm MAX AVGS: 2.5mm Diameter: 1.94±0.05mm
<b>Jacketing</b> LSOH	Thickness(MIN) at any point: 0.5mm MAX AVGS: 0.6mm Diameter: 4.44±0.3mm

<b>WIRE</b>	CAT.6 UTP STR 24AWG×4P
<b>PLUG</b>	YU-02
<b>LENGTH</b>	XXM
<b>COLOR</b>	XX

RoHS Compliant

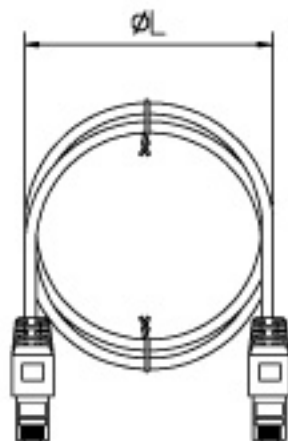

Unless specified on the drawing, tolerances are per the follows:

.X	± 1
.XX	± 0.2
.XXX	± 0.05



<b>DRAW. NO</b>	YU-02	<b>ITEM</b>	2293-XXX	
<b>DEPARTMENT</b>		<b>DRAW</b>	Zhongyang Wu	<b>DATE</b> 2007/05/14
<b>SCALE</b>		<b>CHECKER</b>		<b>DATE</b>
<b>UNIT</b>	MM	<b>APPROVAL</b>		<b>DATE</b>