


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART, CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF OSPC TECHNOLOGY.

SPEC-F005.DWG

REVISONS		DDC NO. SPEC-F005 * Effective 7/8/02 * DCP No. 1398						
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
XX	XX	XXXX	XXXX	30-09-08	XXXX	30-09-08	XXXX	30-09-08
XXXX	XXXX		XXXX	30-09-08	XXXX	30-09-08	XXXX	30-09-08

PCB Layout

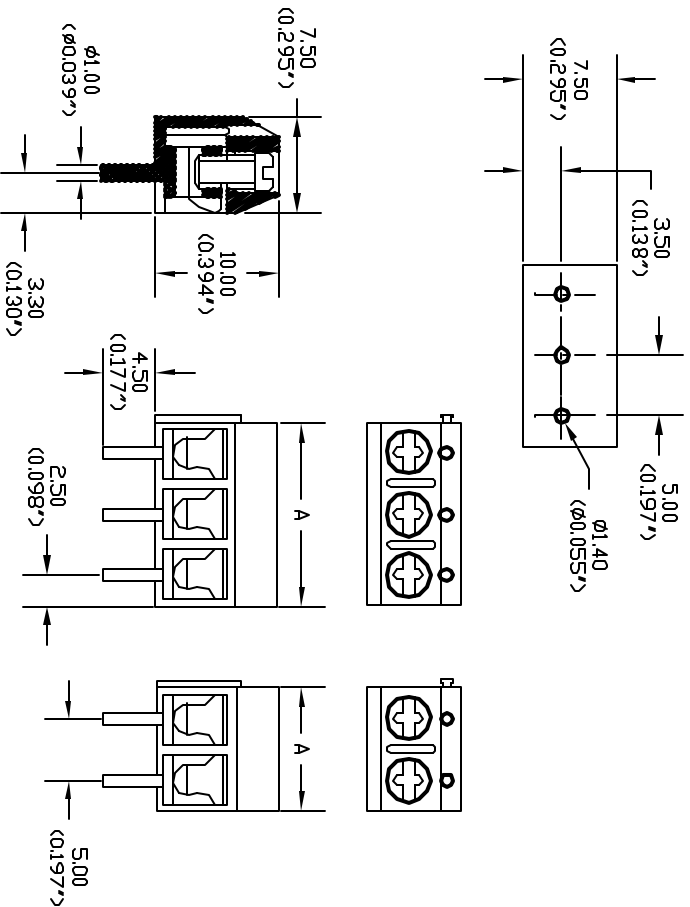

SPECIFICATIONS

Material	Brass, Tin plated
Terminal	Stainless strip steel
Wire protector	Polyester
Insulating body	M30, steel, Nil plated
Screw	Blue
Color	
Environmental	
Operation temperature	-33°C to +105°C
Short-time temperature	250°C (+482° F)
Electrical	
Current rating	16amp ACE50V
Insulation withstand volt	AC1500V min
Insulation resistance	>5000M Ω DC500V
PCB hole Dia:	$\phi 1.4$ mm
Wire strip length	4mm-5mm
Wire range	16-24AWG
Screws torque	4.0 Ib-Inch

Pitch: 5.00mm (0.197inch)			
Item No.	Poles	Almm)	Al(inch)
MC24355	2	10.00	0.394



TOLERANCES:
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

DRAWN BY:	DATE:
XXXX	30-09-08
CHECKED BY:	DATE:
XXXX	30-09-08
APPROVED BY:	DATE:
XXXX	30-09-08

DRAWING TITLE:		DRAWING NO.:		SCALE:		SHEET:	
Mini Terminal Blocks		MC24355		NTS		1 OF 1	
ELECTRONIC FILE		U.D.M., INCHES [MM]		SIZE		SHEET	
1 4N5685		A		A		1	
REV		DATE		DATE		DATE	
XX		30-09-08		30-09-08		30-09-08	