plug. The pliable PVC housing comes in various colours. facility. The lead wire is clamped securely in position by the screw located inside the A 4mm plug at the front and 4mm socket at the rear provides a reliable in-line stacking **SCREW** HOUSING **MATERIALS** 


PLUG PIN : Brass, bright nickel plated : Brass, bright nickel plated

: PVC C36/20

**SPRING** : Spring Steel

RATING: 10 Amps

## Dimensions

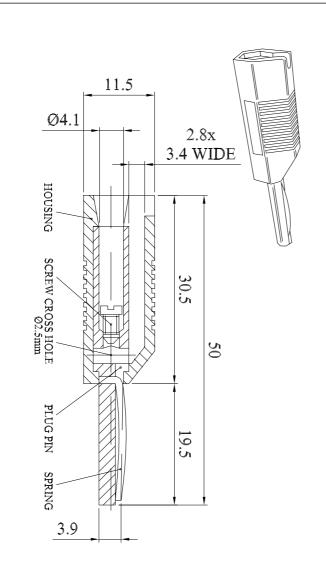

YELLOW	WHITE	RED	GREEN	BROWN	BLUE	BLACK	COLOUR
553-0700	553-0600	553-0500	553-0400	553-0300	553-0200	553-0100	ORDER CODE

CONVERTE
D FROM F
'S0269
SS5 (C
08.11.95)
IN JAN
2003

П		
	DEL	DrgNo
	RO	553
	Z	SEF
	Components	RIES
	M	
	SSUE	

FOR	GEN
アアス	IERAL
SFRIFS	SPECIFIC
	$\triangleright$

TITLE STACKABLE

53 SERIES	AL SPECIFICATION
A S	CU

rvd Date 10/02/03	STOMER
Aprvd By	
y MC	

ËR
REF

ALL DIMENSIONS IN MM ANGLES IN DECIMAL DEGREES

BFS

Drwn by

Scale:

(©) Deltron Emcon Limited E-Mail components@deltron-emcon.com, Website www.deltron-emcon.com. Phone +44 1724 273200 Fax +44 1724 270230