


Plug-in units type 2 with extraction handle – front panel shielded



Article number: 20848-485

• For 6 U, the board location can be moved 1 HP to the right by swapping the upper and lower printed board brackets. This creates space for SMD components on the left-hand side (solder side).

Delivery quantity: kit

Item	Qty	Description	
1	1	Extraction handle, PPE, grey, at bottom	
1a	-	Extraction handle, PPE, grey, at top	
2	1	Identification plate, 1.5 mm aluminium, anodised, cut edges clean	
3	1	Pivot bush, brass	
4	1	Printed board bracket, diecast zinc, at bottom	
4a	-	Printed board bracket, diecast zinc, at top	
5	1	Printed board bracket, diecast zinc	
6	1	U-front panel for extractor handle, front anodised, rear etched	
7	2	Alignment pin, pressed in, stainless steel	
8	2	Sleeve, PA, grey, up to 7 HP front panel width	
8	4	Sleeve, PA, grey, up to 8 HP front panel width	
9	2	Collar screw, cross recess/slot, nickel-plated steel, M2.5 \times 12.3, up to 7 HP front panel width	
9	4	Collar screw, cross recess/slot, nickel-plated steel, M2.5 \times 12.3, up to 8 HP front panel width	
11	1	Raised countersunk head screw, M2.5 × 8	
12	1	EMC textile seal	
13	2	Washer, A2.7	
14	2	Pozidrive flathead screw with cross recess, nickel-plated steel, M2.5 \times 10	

Technical data:


Width	Height	
4 HP	3 U	





Montageanweisung Aushebegriff für Steckbaugruppen Trapezform


Assembly Instructions Plug-in Units Type 2 with Extractor Handle C

Instructions de montage poignée d'extraction trapézoïdale pour bloc c

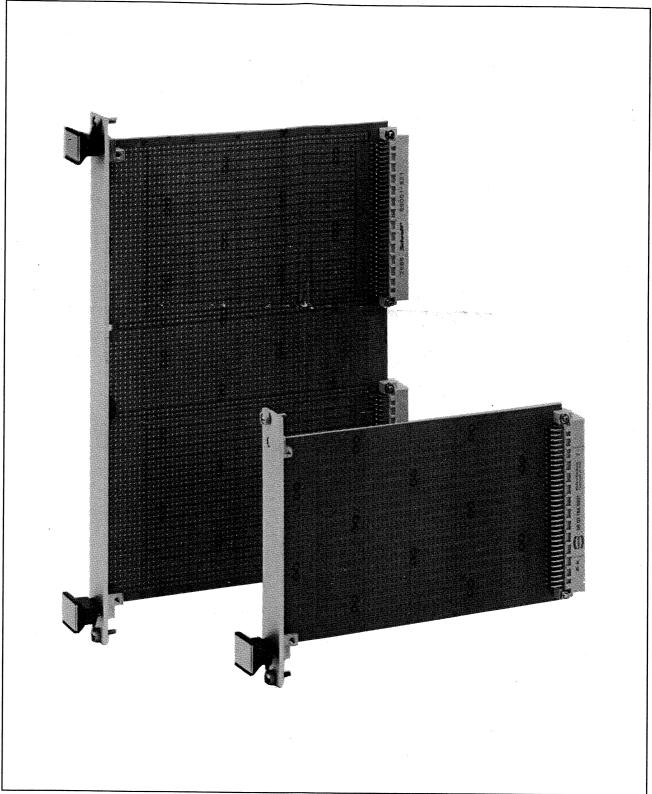

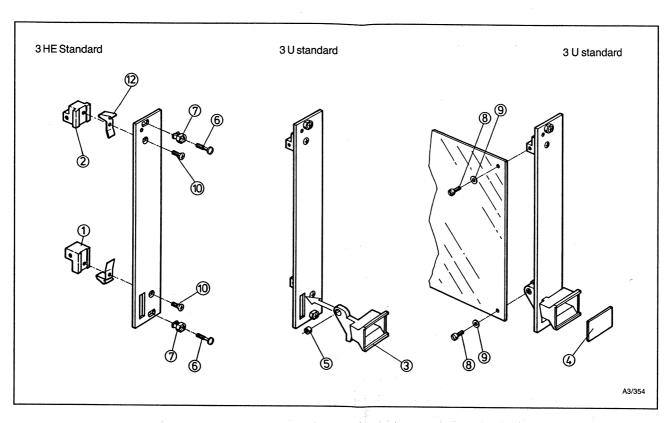

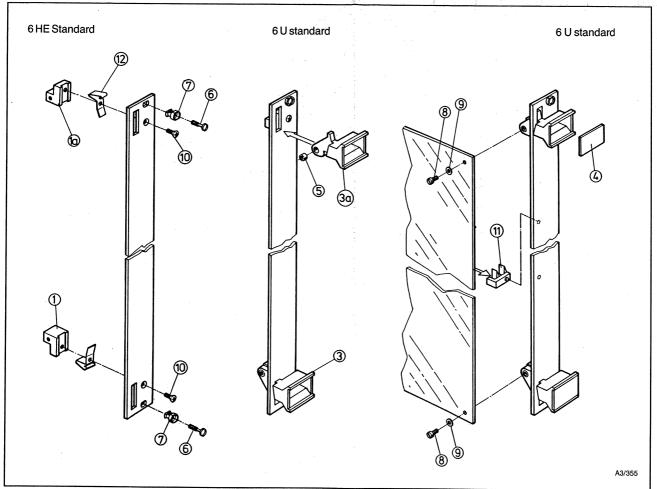


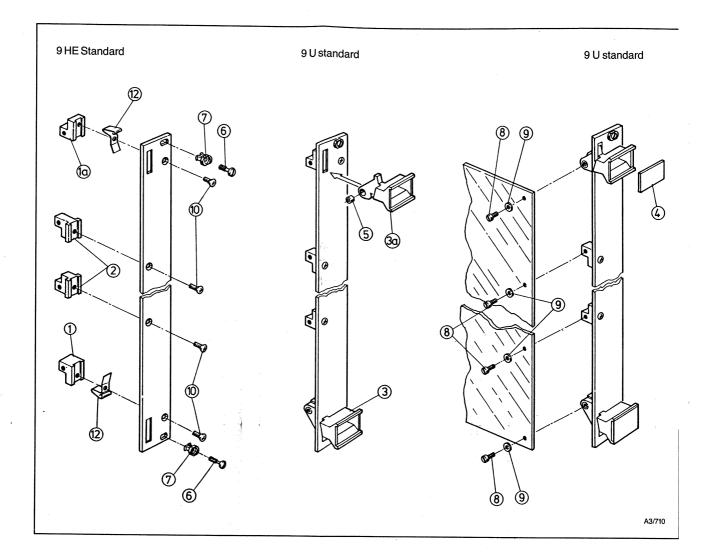


- ① Leiterplattenhalter, unten (bei SMD oben)
- (a) Leiterplattenhalter, oben (bei SMD unten)
- 2 Leiterplattenhalter
- 3 Aushebegriff unten
- 3 Aushebegriff oben
- 4 Beschriftungsblende
- (5) Buchse
- 6 Halsschraube M 2,5 x 11
- Nippel
- 8 Zylinderkopfschraube M 2,5 x 8
- (9) Scheibe
- (10) Linsensenkschraube M 2,5 × 8
- Leiterplattenhalter mitte (11)
- Kontaktfeder


- Board holder, bottom (top for SMD)
- Board holder, top (bottom for SMD)
- ② Board holder, top 3 U
- 3 Extractor handle, bottom
- Extractor handle, top (3a)
- 4 Identification plate
- ⑤ Bush
- 6 Collar screw M 2,5 × 11
- 7 Sleeve
- 8 Cheese head screw M 2,5 \times 8
- 9 Washer
- 10) Raised c/sk screw M 2,5 × 8
- (11) Board holder middle
- Contact springs


- équerre de carte inférieure (avec CMS en haut)
- équerre de carte supérieure (avec CMS en bas)
- équerre de carte
- ③ poignée extractrice inférieure
- poignée extractrice supérieure 3
- (4) plaquette d'identification
- (5) douille
- 6 vis à gorge M 2,5 × 11
- 7 oeillet
- 8 vis à tête cylindrique M $2,5 \times 8$
- (9) rondelle
- (10) vis à tête fraisée M $2,5 \times 8$
- (11) support central de circuit imprimé
- ressort de contact

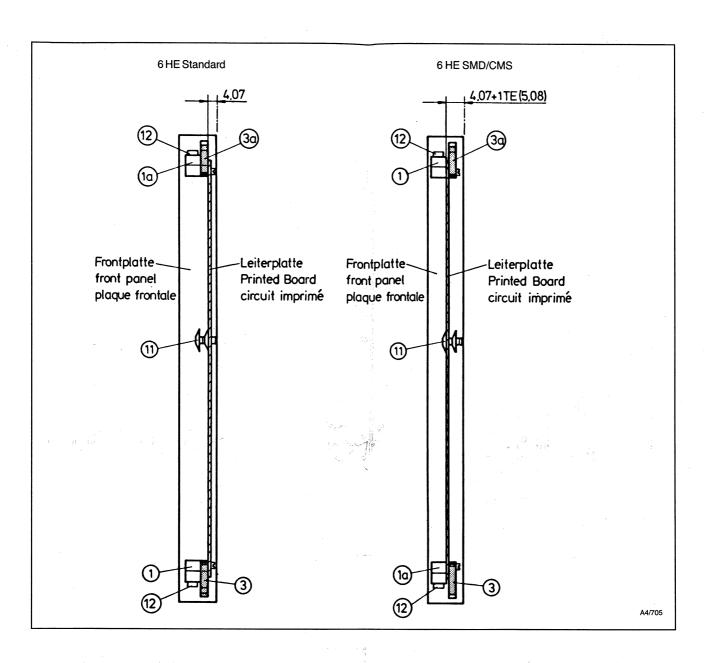

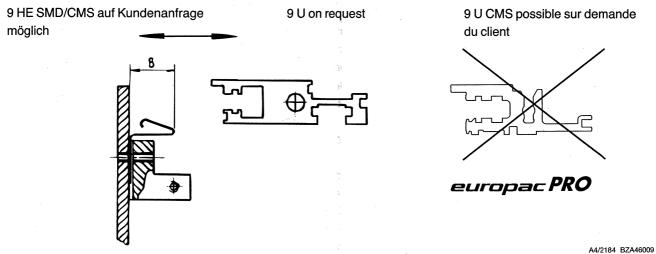

Schroff®

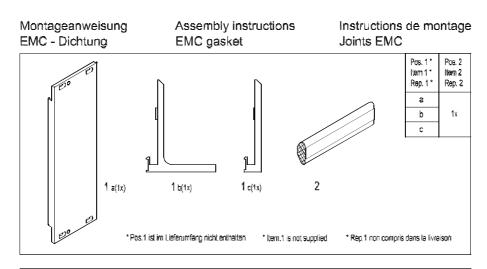

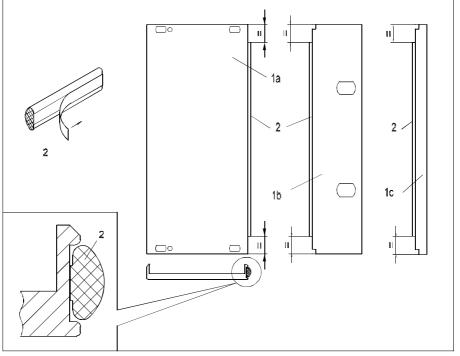

60845 - 015 Revision 001

