

(APPLIED TO SHEET 3)  
 1. TOLERANCES ON ALL DIMENSIONS ±0.15 UNLESS OTHERWISE SPECIFIED.  
 2. P.C. BOARD THICKNESS APPLIES ACROSS TABS AND INCLUDES PLATING AND/OR METALIZATION.  
 3. FINISH OF PAD : GOLD PLATING 0.00076 MIN. OVER Ni PLATING 0.002MIN.  
 NO BURR  
 CHAMFER 0.25 MAX x 45° IF EXIST.

NAME	SIZE	1.8V	17.55	2.4	2.7
<b>tyco</b> Electronics	H	2.5V	18.45	1.5	1.8
Tyco Electronics AMP K.K. Kawasaki, Japan		POWER SUPPLY	D5	D4	D3





THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD	PRODUCT SPEC	NAME
0 P/C	±			DDR1 & DDR2 SODIMM SOCKET
1 P/C	±			0.6mm PITCH 200POS
2 P/C	±			STANDARD PROFILE STANDARD TYPE
3 P/C	±			
4 P/C ANGLES	±			

RECOMMENDED MATING P.C.B CONFIGURATION

CUSTOMER DRAWING	WEIGHT	SCALE	SHEET	OF	REV
A3	00779	2:1	3	4	G

REVISIONS		DATE	DMN	APVD
P	LTR	DESCRIPTION		
-	-	SEE SHEET 1	-	-

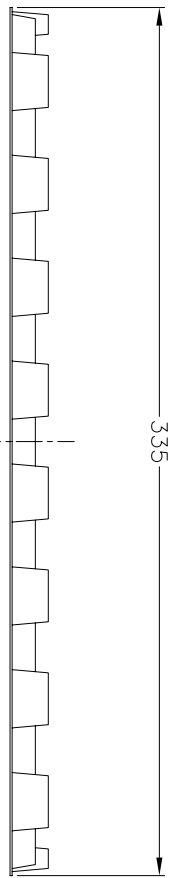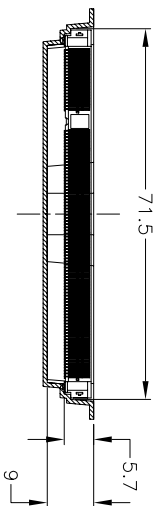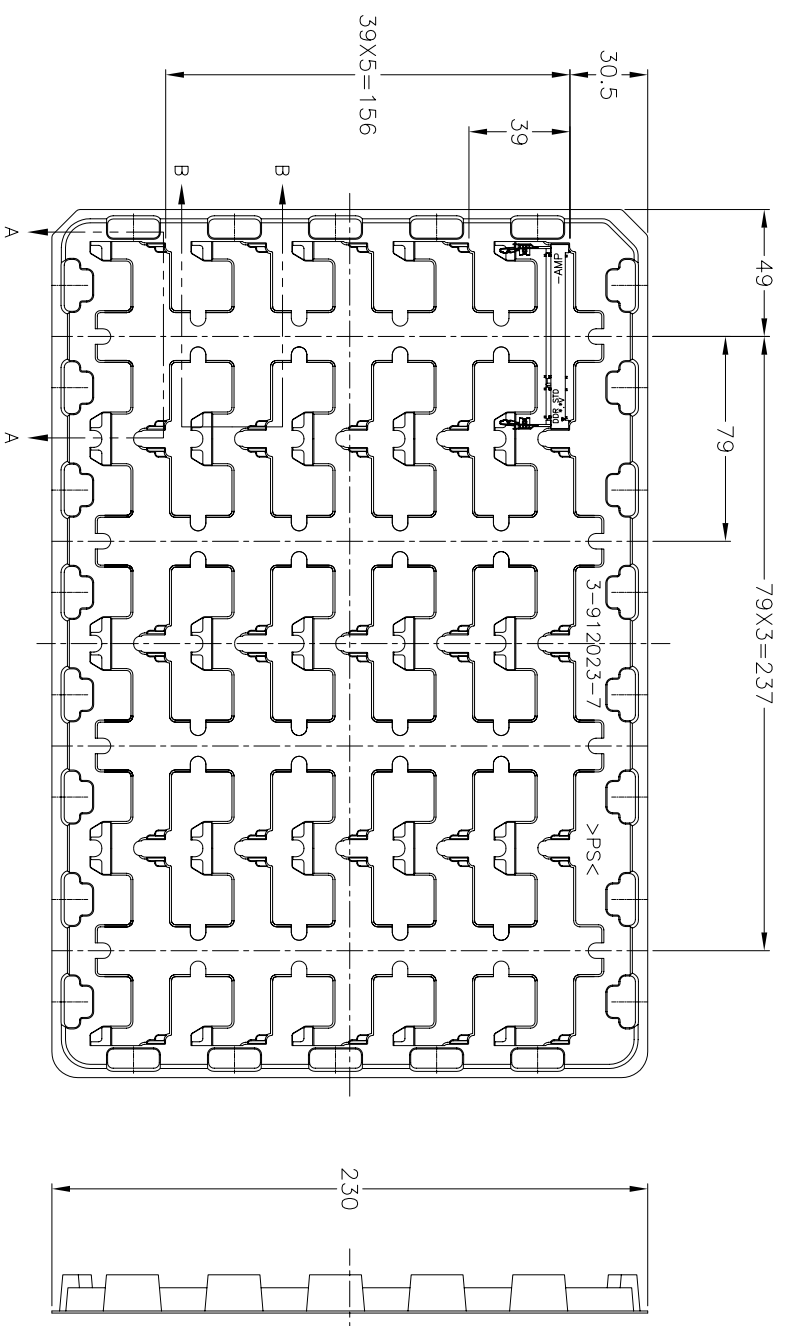

2.5V (DDR1)	20EA/TRAY	1473005-5
1.8V (DDR2)	20EA/TRAY	1-1473005-4
1.8V (DDR2)	20EA/TRAY	1473005-4
2.5V (DDR1)	20EA/TRAY	6-1473005-1
2.5V (DDR1)	20EA/TRAY	1-1473005-1
2.5V (DDR1)	20EA/TRAY	1473005-1
POWER SUPPLY (TYPE)		P/N
	QTY	


A-A  
 SCALE 2:1  
 (180DEG. ROTATE)

B-B  
 SCALE 2:1

(APPLIED TO SHEET 4)  
 1. THE DIRECTION OF EACH CONNECTOR ON A TRAY IS REFERRED TO THIS DRAWING.  
 2. GENERAL TOLERANCE: ±0.5

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM	TOLERANCES: UNLESS OTHERWISE SPECIFIED:
0 P/C	±
1 P/C	±
2 P/C	±
3 P/C	±
4 P/C	±
ANGLES	±
FINISH	±



DMN	CHK	APVD	PRODUCT SPEC	APPLICATION SPEC	WEIGHT	CUSTOMER DRAWING

**tyco**  
**Electronics**  
 Tyco Electronics AMP K.K.  
 Kawasaki, Japan

NAME: DDR1 & DDR2 SODIMM SOCKET  
 0.6mm PITCH 200POS  
 STANDARD PROFILE STANDARD TYPE

SIZE: A3  
 CAGE CODE: 00779  
 DRAWING NO: 1473005

RESTRICTED 20