

NOTES

1. 材質






MATERIAL
 ハウジング : ガラス入りLCP、黒色、UL94V-0
 HOUSING : GLASS FILLED LIQUID CRYSTAL POLYMER, BLACK, UL94V-0
 ターミナル : 銅合金
 TERMINAL : COPPER ALLOY
 シールド : ステンレス鋼
 SHIELD : STAINLESS STEEL
 ネイル : 銅合金
 NAIL : COPPER ALLOY
 吸着テープ : 耐熱樹脂
 VACUUM TAPE : HEAT RESISTING RESIN

2. めっき仕様

PLATING
 ターミナル
 TERMINAL
 接点部 : 金めっき
 CONTACT AREA : GOLD
 半田付け部 : 錫めっき
 SOLDER TAIL AREA : TIN
 下地めっき : ニッケルめっき
 UNDER-PLATING : NICKEL

ネイル
 NAIL
 ニッケル下地錫めっき
 TIN OVER NICKEL PLATING

3. テールとネイルの平坦度 : 0.1MAX
 COPLANARITY : 0.1 MAXIMUM

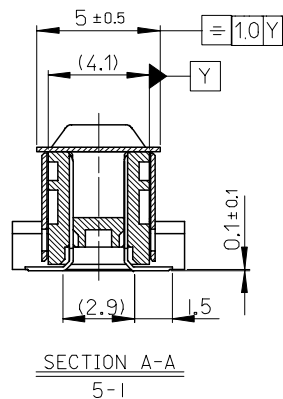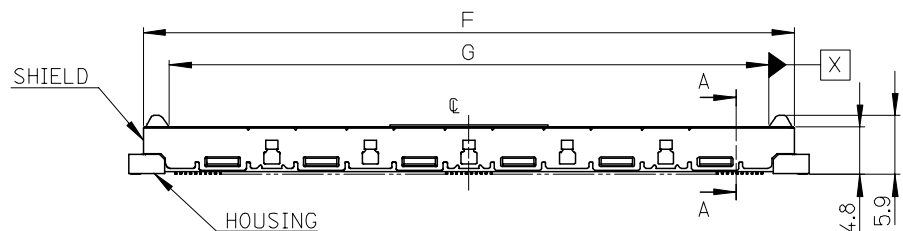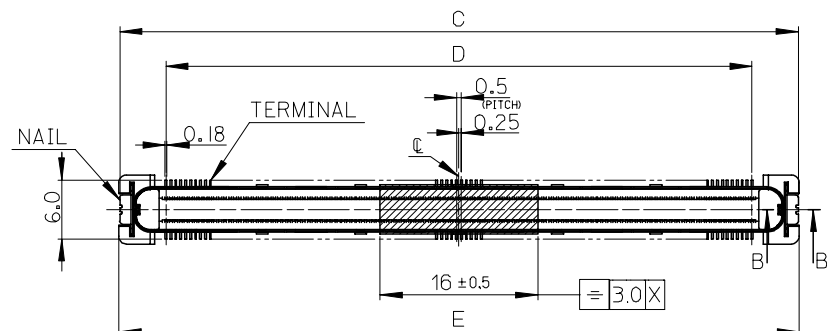

48.9	39.5	49.1	46.1	40.88	501493-1610	501493-1600	160
58.9	49.5	59.1	56.1	50.88	501493-2010	501493-2000	200
68.9	59.5	69.1	66.1	60.88	501493-2410	501493-2400	240
C	D	E	F	G	TRAY PACKAGE	CONNECTOR	CIRCUIT

REVISED EC NO: J2007-0487 DRWN: AYOYAGI 2006/09/07 CHKD: THARUYAMA 2006/11/01 APPR: NUKITA 2006/11/02	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
	10 UNDER	±0.2	DRAWN BY YKOBAYASHI	DATE 2004/10/27	TITLE 0.5 B TO B CONN. SHIELD TYPE PLUG ASSY H=6		
	10 OVER 30 UNDER	±0.25	CHECKED BY HIRATA	DATE 2004/10/27	MOLEX INCORPORATED		
	30 OVER	±0.3	APPROVED BY MSASAO	DATE 2004/10/27	MATERIAL NO. SEE CHART		
ANGULAR ±1 °		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DOCUMENT NO. SD-501493-001		SHEET NO. 1 OF 2	

10 9 8 7 6 5 4 3 2 1

F

F

E

E

D

D

C


C

B

B

A

A

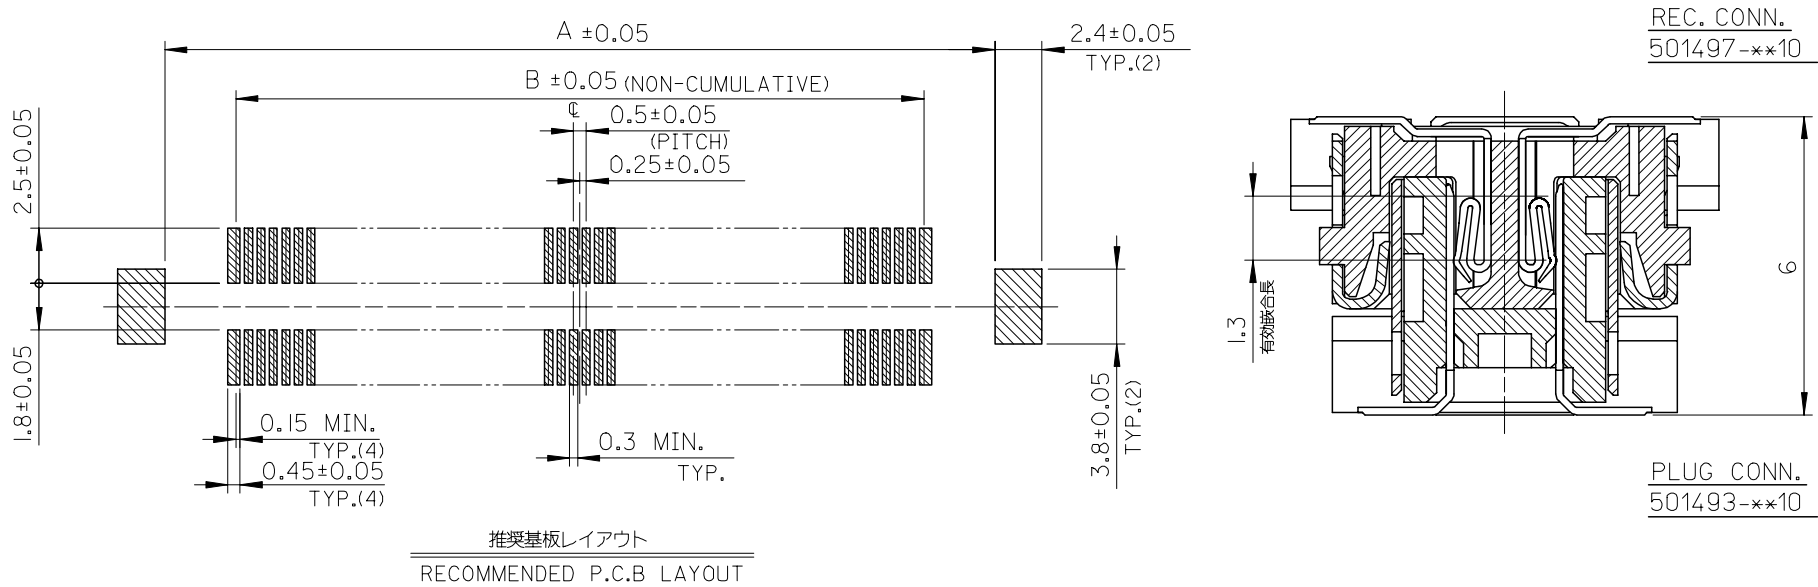


REC. CONN.
501497-**-10

PLUG CONN.
501493-**-10

45.4	39.5	501493-1610	160
55.4	49.5	501493-2010	200
65.4	59.5	501493-2410	240
A	B	TRAY PACKAGE	CIRCUIT

REVISED EC NO: J2007-0487 DRWN: AYOYAGI 2006/09/07 CHKD: THARUYAMA 2006/11/01 APPR: NUKITA 2006/11/02	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
	10 UNDER	±0.2	DRAWN BY YKOBAYASHI	DATE 2004/10/27	TITLE 0.5 B TO B CONN. SHIELD TYPE PLUG ASSY H=6			
	10 OVER 30 UNDER	±0.25	CHECKED BY HIRATA	DATE 2004/10/27				
	30 OVER	±0.3	APPROVED BY MSASAO	DATE 2004/10/27	MOLEX INCORPORATED			
	ANGULAR	±--- °	MATERIAL NO.	DOCUMENT NO. SD-501493-001				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A3	SEE CHART			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

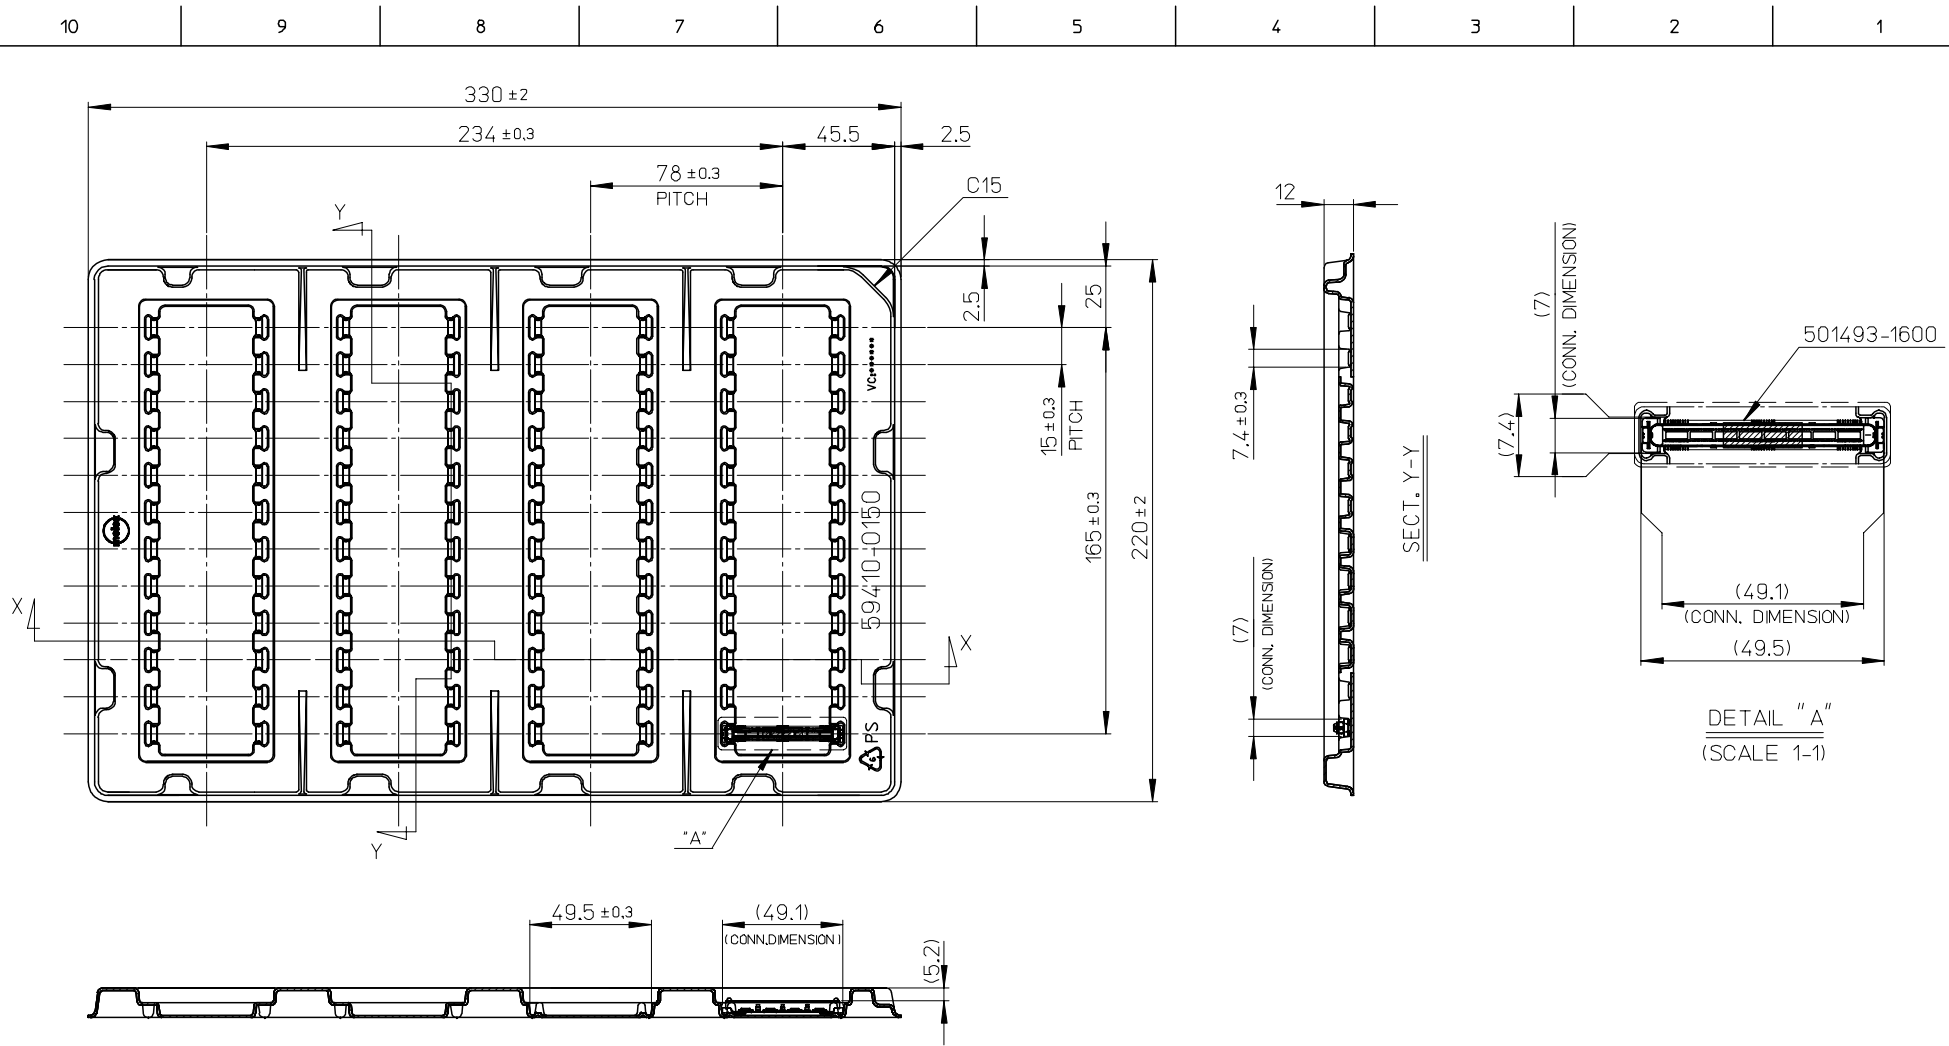

注記

1. 一般公差: ±0.5
GENERAL TOLERANCES: ±0.5
2. 各部の反りは1.5MAX.
WARP: 1.5MAX.
3. 梱包数: 48個
PACKAGING QUANTITY: 48PCS.
4. 標準梱包数: 720個
STANDARD PACKAGING QUANTITY: 720PCS.
5. トレイは180°反転させて重ねる。
180 DEGREES IS REVERSED AND A TRAY IS PILED UP.

SECT. X-X

SECT. Y-Y

DETAIL "A"
(SCALE 1-1)

501493-1610

適用製品番号
APPLICABLE PART No.

RELEASED EC NO: J2007-1260 DRWN: OTANI CHKDM: SOGAYA APPR: NUKITA	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY	SCALE 1:2	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
	10 UNDER ±0.2	30 UNDER ±0.25	DRAWN BY Y. OTANI	DATE 2006/10/30	TITLE TRAY FOR 501493-1610 (0.5 B TO B CONN. SHIELD TYPE PLUG ASSY 160P H=6)		
	10 OVER ±0.25	30 OVER ±0.3	CHECKED BY M. ISOGAYA	DATE 2006/10/30	MOLEX INCORPORATED		
	30 OVER ±0.3	ANGULAR ±1°	APPROVED BY N. UKITA	DATE 2006/10/30			
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. 594100150	DOCUMENT NO. SD-501493-004	SHEET NO. 1 OF 1		
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							