


Reliable Basic Switches in a Wide Variation

- Wide variation of best-selling microswitches with switching currents of 10 to 21 A.
- Can be used for interrupting current when doors are opened or closed.
- Available in two types of cases: thermoplastic resin and thermosetting resin.

RoHS Compliant

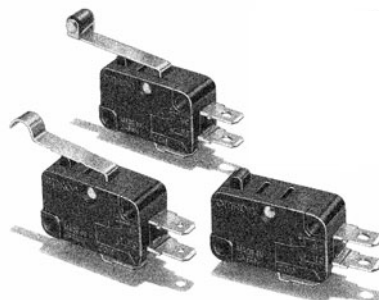

Ordering Information

■ Model Number Legend

V-□□□-□□□-□
1 2 3 4 5 6 7

1. Ratings

- 21: 21 A at 250 VAC
- 16: 16 A at 250 VAC
- 15: 15 A at 250 VAC
- 10: 10 A at 250 VAC

2. Contact Gap

- None: 1 mm (F gap)
- G: 0.5 mm (G gap) (for remodelling)

3. Actuator

- None: Pin plunger
- 1: Short hinge lever
- 2: Hinge lever
- 3: Long hinge lever
- 4: Simulated roller lever
- 5: Short hinge roller lever
- 6: Hinge roller lever

4. Contact Form

- 1: SPDT
- 2: SPST-NC
- 3: SPST-NO

5. Terminals

- A: Solder terminals
- C2: Quick-connect terminals (#187)
- C: Quick-connect terminals (#250)

6. Maximum Operating Force

- 6: 3.92 N {400 gf}
- 5: 1.96 N {200 gf}
- 4: 0.98 N {100 gf}

Note: These values are for the pin plunger models.








7. Special Purpose (Models with Thermosetting Case Only)

- None: Standard (80°C)
- T: Heat-resistive (150°C)

■ List of Models

General-purpose Models








Thermoplastic Case

| Actuator | Contact form | Terminals (see note) | 21 A | 16 A |
|--|--------------|----------------------|-----------------------|-----------------------|
| | | | (OF: 3.92 N {400 gf}) | (OF: 1.96 N {200 gf}) |
| Pin plunger  | SPDT | A | --- | V-16-1A5 |
| | | C2 | --- | V-16-1C25 |
| | | C | V-21-1C6 | V-16-1C5 |
| | SPST-NC | A | --- | V-16-2A5 |
| | | C2 | --- | V-16-2C25 |
| | | C | V-21-2C6 | V-16-2C5 |
| | SPST-NO | A | --- | V-16-3A5 |
| | | C2 | --- | V-16-3C25 |
| | | C | V-21-3C6 | V-16-3C5 |
| Short hinge lever  | SPDT | A | --- | V-161-1A5 |
| C2 | | --- | V-161-1C25 | |
| C | | V-211-1C6 | V-161-1C5 | |
| Hinge lever  | SPDT | A | --- | V-162-1A5 |
| C2 | | --- | V-162-1C25 | |
| C | | V-212-1C6 | V-162-1C5 | |
| Long hinge lever  | SPDT | A | --- | V-163-1A5 |
| C2 | | --- | V-163-1C25 | |
| C | | V-213-1C6 | V-163-1C5 | |
| Simulated roller lever  | SPDT | A | --- | V-164-1A5 |
| C2 | | --- | V-164-1C25 | |
| C | | V-214-1C6 | V-164-1C5 | |
| Short hinge roller lever  | SPDT | A | --- | V-165-1A5 |
| C2 | | --- | V-165-1C25 | |
| C | | V215-1C6 | V-165-1C5 | |
| Hinge roller lever  | SPDT | A | --- | V-166-1A5 |
| C2 | | --- | V-166-1C25 | |
| C | | V216-1C6 | V-166-1C5 | |

Note: A: Solder terminals
 C2: Quick-connect terminals (#187)
 C: Quick-connect terminals (#250)

Consult your OMRON sales representative for details on SPST-NO and SPST-NC models.

Thermosetting Case








| Actuator | Contact form | Terminals (see note 1) | 15 A | 10 A | |
|---|--------------|---------------------------|---------------------|---------------------|---------------------|
| | | | OF: 1.96 N {200 gf} | OF: 1.96 N {200 gf} | OF: 0.98 N {100 gf} |
| Pin plunger  | SPDT | A | V-15-1A5 | V-10-1A5 | V-10-1A4 |
| | | C2 | V-15-1C25 | V-10-1C25 | V-10-1C24 |
| | SPST-NC | A | V-15-2A5 | V-10-2A5 | V-10-2A4 |
| | | C2 | V-15-2C25 | V-10-2C25 | V-10-2C24 |
| | SPST-NO | A | V-15-3A5 | V-10-3A5 | V-10-3A4 |
| | | C2 | V-15-3C25 | V-10-3C25 | V-10-3C24 |
| Short hinge lever  | SPDT | A | V-151-1A5 | V-101-1A5 | V-101-1A4 |
| | | C2 | V-151-1C25 | V-101-1C25 | V-101-1C24 |
| Hinge lever  | | A | V-152-1A5 | V-102-1A5 | V-102-1A4 |
| | | C2 | V-152-1C25 | V-102-1C25 | V-102-1C24 |
| Long hinge lever  | | A | V-153-1A5 | V-103-1A5 | V-103-1A4 |
| | | C2 | V-153-1C25 | V-103-1C25 | V-103-1C24 |
| Simulated roller lever  | | A | V-154-1A5 | V-104-1A5 | V-104-1A4 |
| | | C2 | V-154-1C25 | V-104-1C25 | V-104-1C24 |
| Short hinge roller lever  | | A | V-155-1A5 | V-105-1A5 | V-105-1A4 |
| | | C2 | V-155-1C25 | V-105-1C25 | V-105-1C24 |
| Hinge roller lever  | | A | V-156-1A5 | V-106-1A5 | V-106-1A4 |
| | | C2 | V-156-1C25 | V-106-1C25 | V-106-1C24 |

Note: 1. A: Solder terminals
C2: Quick-connect terminals (#187)

2. OF values shown in the table are for the pin plunger models.

Consult your OMRON sales representative for details on SPST-NO and SPST-NC models.

Heat Resistant Models (Up to 150°C)

| Actuator | Contact form | Terminals | 15 A | 10 A |
|--|--------------|-----------|---------------------|---------------------|
| | | | OF: 1.96 N {200 gf} | OF: 0.98 N {100 gf} |
| Pin plunger  | SPDT | A | V-15-1A5-T | V-10-1A4-T |
| Short hinge lever  | | | V-151-1A5-T | V-101-1A4-T |
| Hinge lever  | | | V-152-1A5-T | V-102-1A4-T |
| Long hinge lever  | | | V-153-1A5-T | V-103-1A4-T |
| Simulated roller lever  | | | V-154-1A5-T | V-104-1A4-T |
| Short hinge roller lever  | | | V-155-1A5-T | V-105-1A4-T |
| Hinge roller lever  | | | V-156-1A5-T | V-106-1A4-T |

Note: A: Solder terminals.

Consult your OMRON sales representative for details on SPST-NO and SPST-NC models.

Specifications

■ Ratings

| Model | Item | Resistive load |
|-------|---------------|----------------|
| | Rated voltage | |
| V-21 | 250 VAC | 21 A |
| | 125 VDC | 0.6 A |
| | 250 VDC | 0.3 A |
| V-16 | 250 VAC | 16 A |
| | 125 VDC | 0.6 A |
| | 250 VDC | 0.3 A |
| V-15 | 250 VAC | 15 A |
| | 125 VDC | 0.6 A |
| | 250 VDC | 0.3 A |
| V-10 | 250 VAC | 10 A |
| | 125 VDC | 0.6 A |
| | 250 VDC | 0.3 A |

Note: The ratings values apply under the following test conditions:
 Ambient temperature: 20±2°C
 Ambient humidity: 65±5%
 Operating frequency: 30 operations/min

■ Characteristics

| | |
|--|--|
| Operating speed | 0.1 mm to 1 m/s (pin plunger models) |
| Operating frequency | Mechanical:600 operations/min max. (pin plunger models) Electrical:60 operations/min max. |
| Insulation resistance | 100 MΩ min. (at 500 VDC) |
| Contact resistance (initial value) | 15 mΩ max. |
| Dielectric strength (see note 2) | 1,000 VAC, 50/60 Hz for 1 min between terminals of the same polarity V-21 and V-16 models: 2,000 VAC, 50/60 Hz for 1 min between current-carrying metal parts and ground, and between each terminal and non-current-carrying metal parts V-15 and V-10 models: 1,500 VAC, 50/60 Hz for 1 min between current-carrying metal parts and ground, and between each terminal and non-current-carrying metal parts |
| Vibration resistance (see note 3) | Malfunction: 10 to 55 Hz, 1.5-mm double amplitude |
| Shock resistance (see note 3) | Destruction: 1,000 m/s ² {approx. 100G} max. Malfunction: V-21/V-16/V-15: 300 m/s ² {approx. 30G} max. V-10: 200 m/s ² {approx. 20G} max. |
| Durability (see note 4) | Mechanical: 50,000,000 operations min. (60 operations/min) Electrical: V-21/V-16/V-15: 100,000 operations min. (30 operations/min) (V-15 heat resistive: 20,000 operation min. (30 operations/min)) V-10: 300,000 operations min. (30 operations/min) (V-10 heat resistive: 50,000 operation min. (30 operations/min)) |
| Degree of protection | IEC IP40 |
| Degree of protection against electric shock | Class I |
| Proof tracking index (PTI) | 175 |
| Ambient operating temperature | -25°C to 80°C (at ambient humidity of 60% max.) (with no icing or condensation) -25°C to 150°C for heat-resistive model (at ambient humidity of 60% max.) (with no icing or condensation) |
| Ambient operating humidity | 85% max. (for 5°C to 35°C) |
| Weight | Approx. 6.2 g (pin plunger models) |

- Note:**
1. The data given above are initial values.
 2. The dielectric strength values shown in the table are for models with a Separator.
 3. For the pin plunger models, the above values apply for use at both the free position and total travel position. For the lever models, they apply at the total travel position.
 4. For testing conditions, contact your OMRON sales representative.

■ Approved Standards

Consult your OMRON sales representative for specific models with standard approvals.

UL1054 (File No. E41515)/CSA C22.2 No. 55 (File No. LR21642)

| Rated voltage | V-21 | V-16 | V-15 | V-10 |
|--------------------|----------------|----------------|----------------|----------------|
| 125 VAC 250 VAC | 21 A, 1/2 HP | 16 A, 1/2 HP | 15 A, 1/2 HP | 10 A, 1/3 HP |
| 125 VDC 250 VDC | 0.6 A 0.3 A | 0.6 A 0.3 A | 0.6 A 0.3 A | 0.6 A 0.3 A |

EN61058-01 (File No. 40025231, VDE approval)

| Rated voltage | V-21 | V-16 |
|---------------|----------|----------|
| 250 VAC | 20 (4) A | 16 (4) A |


Testing conditions: 5E4 (50,000 operations), for models of V-21: T80 (0°C to 80°C), for models of V-16: T105 (0°C to 105°C)

■ Contact Specifications


| Item | | V-21 | V-16 | V-15 | V-10 |
|-------------------------|----------------------|--------------------------------|-----------|-----------|-----------|
| Contact | Specification | Rivet | | | |
| | Material | Silver alloy | | | Silver |
| | Gap (standard value) | 1 mm (F gap) or 0.5 mm (G gap) | | | |
| Inrush current | NC | 50 A max. | 40 A max. | 36 A max. | 24 A max. |
| | NO | | | | |
| Minimum applicable load | | 160 mA at 5 VDC | | | |

■ Contact Form


SPDT



SPST-NC



SPST-NO




Dimensions

■ Terminals

- Note:**
- All units are in millimeters unless otherwise indicated.
 - The following is for the SPDT contact specifications. Two terminals will be available for SPST-NO or SPST-NC contact specifications. For terminal positions, refer to *Contact Form* on page 6.
 - Right-angle PCB terminal type is available
 D5 type: Pins at right angles, to the right.
 D6 type: Pins at right angles, to the left.
 Drawings will be provided if requested.

| Terminal type | Solder terminals (A) | Quick-connect Terminals (#187) (C2) | Quick-connect Terminals (#250) (C) |
|---------------------|--|--|--|
| COM bottom position | <p>Three, solder terminals</p> | <p>Three, quick-connect terminals (#187)</p> | <p>Three, quick-connect terminals (#250)</p> |
| Terminal dimensions | <p>Note: Indicates the length to the center of the 1.6-dia. holes</p> | | |

■ Mounting Holes



■ Dimensions and Operating Characteristics



- Note:**
1. All units are in millimeters unless otherwise indicated.
 2. Unless otherwise specified, a tolerance of ± 0.4 mm applies to all dimensions.
 3. The □ in the model number is for the terminal code.
 4. The operating characteristics are for operation in the A direction (↕).

■ Thermoplastic Case (V-21/-16 Models)

The following illustrations and drawings are for quick-connect terminals (#250) (terminals C). V models with a switching current of 16 A incorporates terminals A and C2. These models are different from #250 models in terminal size only. Terminals A, C2, are omitted from the following drawings. Refer to *Kinds of Terminals* on page 6 for these terminals.

Pin Plunger Models (Without Barrier)



V-21-1□6
V-16-1□5

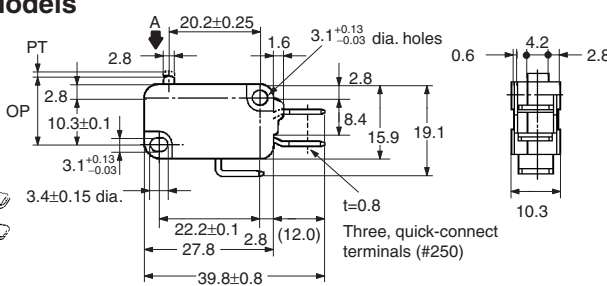

| Model | V-21-1□6 | V-16-1□5 |
|---------|-----------------|-----------------|
| OF max. | 3.92 N {400 gf} | 1.96 N {200 gf} |
| RF min. | 0.78 N {80 gf} | 0.49 N {50 gf} |
| PT max. | 1.2 mm | |
| OT min. | 1.0 mm | |
| MD max. | 0.4 mm | |
| OP | 14.7±0.4 mm | |

Short Hinge Lever Models

V-211-1□6
V-161-1□5

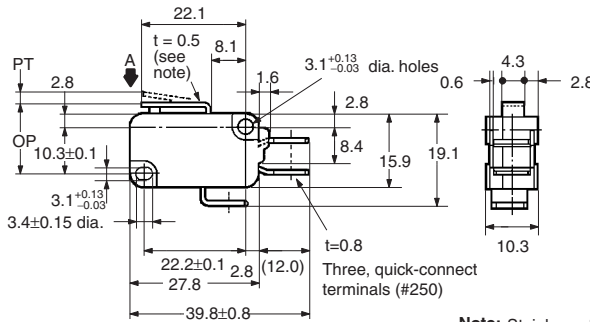



| Model | V-211-1□6 | V-161-1□5 |
|---------|-----------------|-----------------|
| OF max. | 3.92 N {400 gf} | 1.96 N {200 gf} |
| RF min. | 0.49 N {50 gf} | 0.49 N {50 gf} |
| PT max. | 1.6 mm | |
| OT min. | 0.8 mm | |
| MD max. | 0.6 mm | |
| OP | 15.2±0.5 mm | |

Note: Stainless-steel lever

Hinge Lever Models

V-212-1□6
V-162-1□5

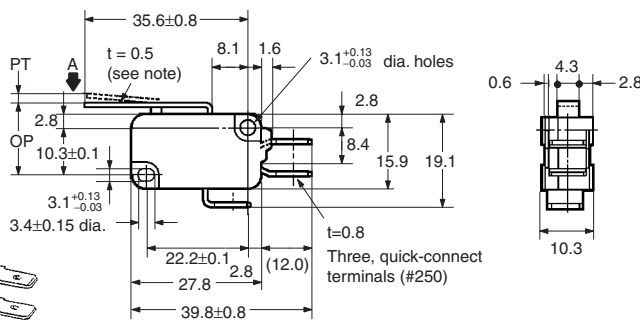


| Model | V-212-1□6 | V-162-1□5 |
|---------|-----------------|-----------------|
| OF max. | 2.45 N {250 gf} | 1.23 N {125 gf} |
| RF min. | 0.25 N {25 gf} | 0.14 N {14 gf} |
| PT max. | 4.0 mm | |
| OT min. | 1.6 mm | |
| MD max. | 1.5 mm | |
| OP | 15.2±1.2 mm | |

Note: Stainless-steel lever

Long Hinge Lever Models

V-213-1□6
V-163-1□5

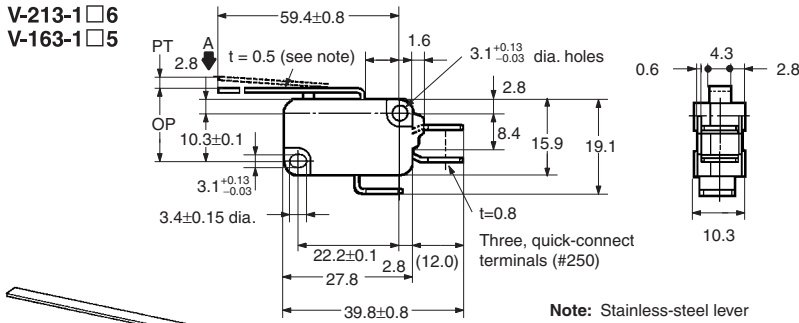


| Model | V-213-1□6 | V-163-1□5 |
|---------|---|----------------|
| OF max. | 1.27 N {130 gf} | 0.69 N {70 gf} |
| RF min. | 0.12 N {12 gf} | 0.06 N {6 gf} |
| PT max. | 9.0 mm | |
| OT min. | 2.0 mm | |
| MD max. | 2.8 mm | |
| OP | 15.2 ^{+2.6} _{-3.2} mm | |

Note: Stainless-steel lever

Simulated Roller Lever Models

V-214-1□6
V-164-1□5

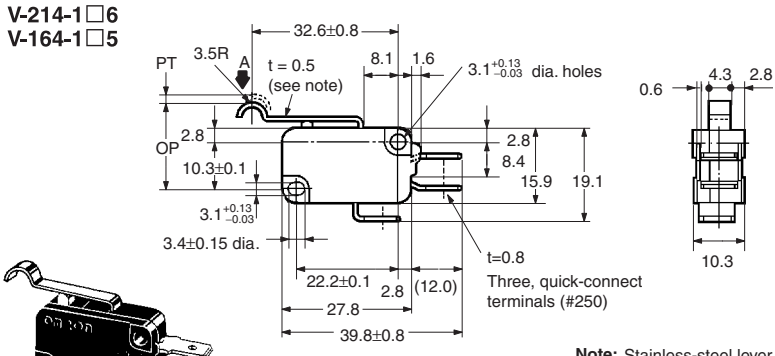


| Model | V-214-1□6 | V-164-1□5 |
|---------|-----------------|-----------------|
| OF max. | 2.45 N {250 gf} | 1.23 N {125 gf} |
| RF min. | 0.25 N {25 gf} | 0.14 N {14 gf} |
| PT max. | 4.0 mm | |
| OT min. | 1.6 mm | |
| MD max. | 1.5 mm | |
| OP | 18.7±1.2 mm | |

Note: Stainless-steel lever

Short Hinge Roller Lever Models

V-215-1□6
V-165-1□5

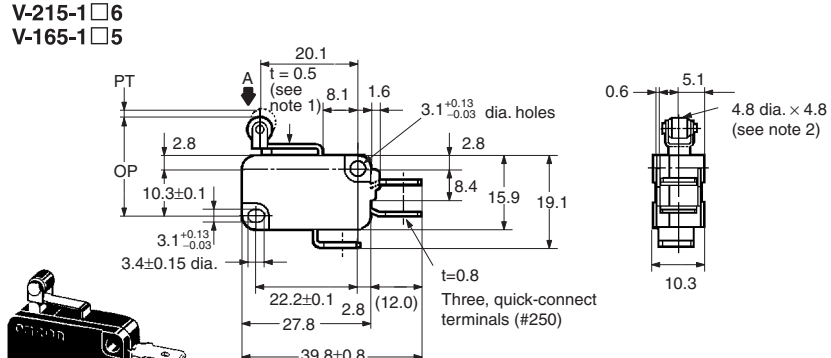


| Model | V-215-1□6 | V-165-1□5 |
|---------|-----------------|-----------------|
| OF max. | 4.71 N {480 gf} | 2.35 N {240 gf} |
| RF min. | 0.49 N {50 gf} | 0.49 N {50 gf} |
| PT max. | 1.6 mm | |
| OT min. | 0.8 mm | |
| MD max. | 0.6 mm | |
| OP | 20.7±0.6 mm | |

Note: 1. Stainless-steel lever
2. Oilless polyacetal resin roller

Hinge Roller Lever Models

V-216-1□6
V-166-1□5

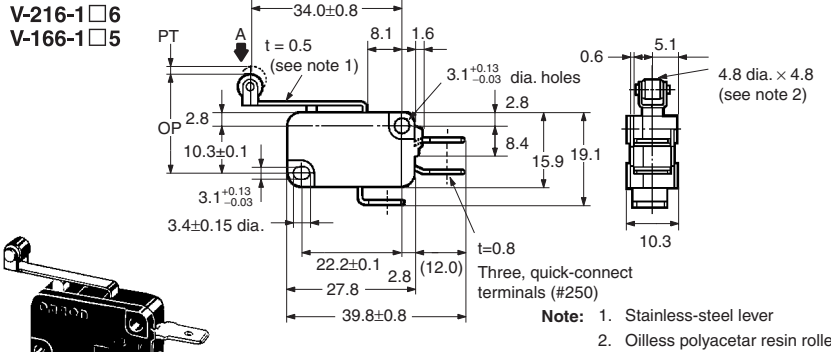

| Model | V-216-1□6 | V-166-1□5 |
|---------|-----------------|-----------------|
| OF max. | 2.45 N {250 gf} | 1.23 N {125 gf} |
| RF min. | 0.25 N {25 gf} | 0.14 N {14 gf} |
| PT max. | 4.0 mm | |
| OT min. | 1.6 mm | |
| MD max. | 1.5 mm | |
| OP | 20.7±1.2 mm | |


Note: 1. Stainless-steel lever
2. Oilless polyacetal resin roller

■ Thermosetting Case (V-15/-10 Models)

The following illustration and drawing are for solder and quick-connect terminals (#187) (terminals A). V models with a switching current of 15 A or 10 A incorporate terminals C2. These models are different from #187 models in terminal size only. Refer to *Terminals* on page 6 for these terminals.

Pin Plunger Models


- V-15-1□5
- V-10-1□5
- V-10-1□4

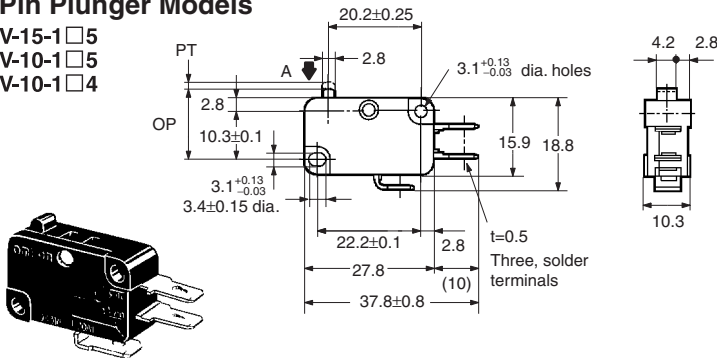

| Model | V-15-1□5 V-10-1□5 | V-10-1□4 |
|---------|----------------------|-----------------|
| OF max. | 1.96 N {200 gf} | 0.98 N {100 gf} |
| RF min. | 0.49 N {50 gf} | 0.20 N {20 gf} |
| PT max. | 1.2 mm | |
| OT min. | 1.0 mm | |
| MD max. | 0.4 mm | |
| OP | 14.7±0.4 mm | |

Short Hinge Lever Models

- V-151-1□5
- V-101-1□5
- V-101-1□4

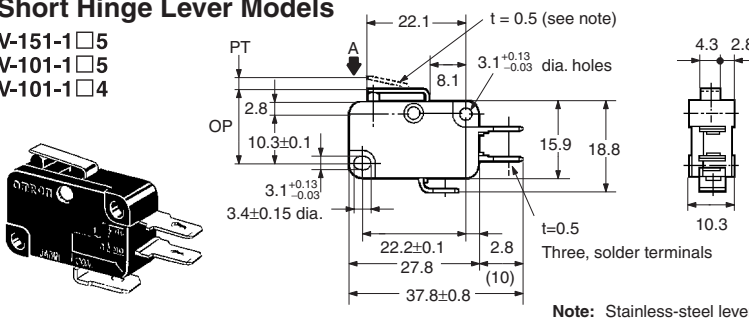


Note: Stainless-steel lever

| Model | V-151-1□5 V-101-1□5 | V-101-1□4 |
|---------|------------------------|-----------------|
| OF max. | 1.96 N {200 gf} | 0.98 N {100 gf} |
| RF min. | 0.49 N {50 gf} | 0.15 N {15 gf} |
| PT max. | 1.6 mm | |
| OT min. | 0.8 mm | |
| MD max. | 0.6 mm | |
| OP | 15.2±0.5 mm | |

Hinge Lever Models

- V-152-1□5
- V-102-1□5
- V-102-1□4

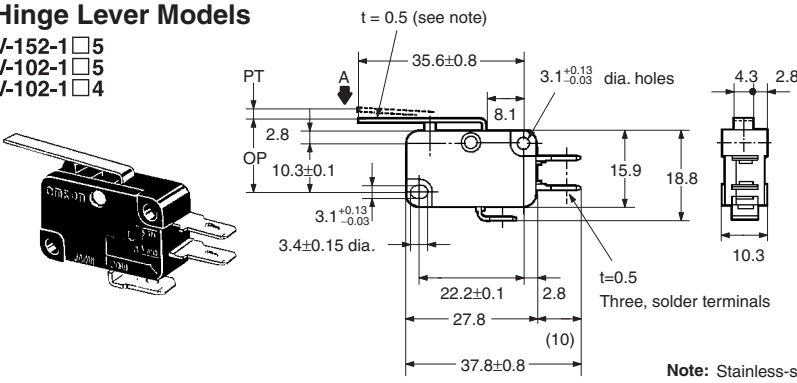


Note: Stainless-steel lever

| Model | V-152-1□5 V-102-1□5 | V-102-1□4 |
|---------|------------------------|----------------|
| OF max. | 1.23 N {125 gf} | 0.59 N {60 gf} |
| RF min. | 0.14 N {14 gf} | 0.06 N {6 gf} |
| PT max. | 4.0 mm | |
| OT min. | 1.6 mm | |
| MD max. | 1.5 mm | |
| OP | 15.2±1.2 mm | |

Long Hinge Lever Models

- V-153-1□5
- V-103-1□5
- V-103-1□4


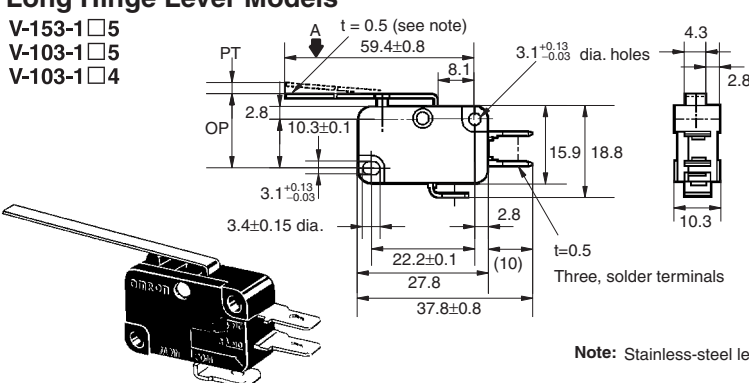


Note: Stainless-steel lever

| Model | V-153-1□5 V-103-1□5 | V-101-1□4 |
|---------|---|----------------|
| OF max. | 0.69 N {70 gf} | 0.34 N {35 gf} |
| RF min. | 0.06 N {6 gf} | --- |
| PT max. | 9.0 mm | 9.0 mm |
| OT min. | 2.0 mm | 3.2 mm |
| MD max. | 2.8 mm | 2.8 mm |
| OP | 15.2 ^{+2.6} _{-3.2} mm | 15.2±2.6 mm |

Simulated Roller Lever Models

- V-154-1□5
- V-104-1□5
- V-104-1□4

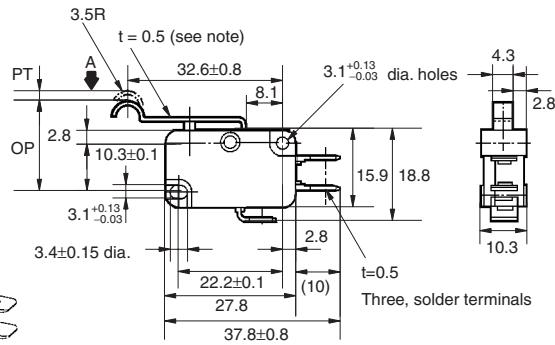



Note: Stainless-steel lever

| Model | V-154-1□5 V-104-1□5 | V-104-1□4 |
|---------|------------------------|----------------|
| OF max. | 1.23 N {125 gf} | 0.59 N {60 gf} |
| RF min. | 0.14 N {14 gf} | 0.06 N {6 gf} |
| PT max. | 4.0 mm | |
| OT min. | 1.6 mm | |
| MD max. | 1.5 mm | |
| OP | 18.7 ± 1.2 mm | |

Short Hinge Roller Lever Models

- V-155-1□5
- V-105-1□5
- V-105-1□4

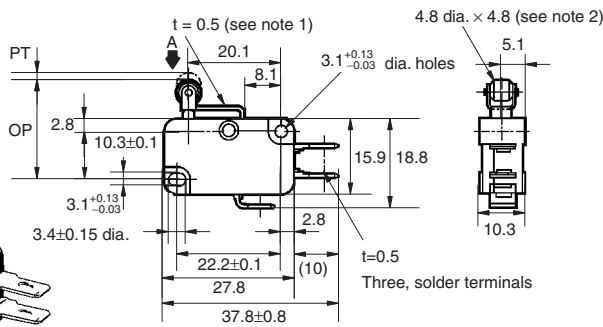



Note: 1. Stainless-steel lever
2. Oilless polyacetal resin roller

| Model | V-155-1□5 V-105-1□5 | V-105-1□4 |
|---------|------------------------|-----------------|
| OF max. | 2.35 N {240 gf} | 1.18 N {120 gf} |
| RF min. | 0.49 N {50 gf} | 0.15 N {15 gf} |
| PT max. | 1.6 mm | |
| OT min. | 0.8 mm | |
| MD max. | 0.6 mm | |
| OP | 20.7 ± 0.6 mm | |

Hinge Roller Lever Models

- V-156-1□5
- V-106-1□5
- V-106-1□4

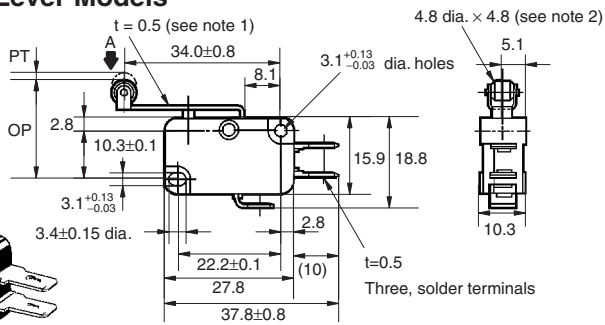

Note: 1. Stainless-steel lever
2. Oilless polyacetal resin roller

| Model | V-156-1□5 V-106-1□5 | V-106-1□4 |
|---------|------------------------|----------------|
| OF max. | 1.23 N {125 gf} | 0.59 N {60 gf} |
| RF min. | 0.14 N {14 gf} | 0.06 N {6 gf} |
| PT max. | 4.0 mm | |
| OT min. | 1.6 mm | |
| MD max. | 1.5 mm | |
| OP | 20.7 ± 1.2 mm | |

Precautions

Refer to *General Information*.

■ Correct Use

Mounting

Use M3 mounting screws with plane washers or spring washers to securely mount the Switch. Tighten the screws to a torque of 0.39 to 0.59 N·m {4 to 6 kgf·cm}.

Insulation Distance

According to EN61058-1, the minimum insulation thickness for this Switch should be 1.1 mm and minimum clearance distance between the terminal and mounting plate should be 1.9 mm. If the insulation distance cannot be provided in the product incorporating the Switch, either use a Switch with insulation barrier or use a Separator to ensure sufficient insulation distance. Refer to Separator.

■ Actuator (Sold Separately)

Various Actuators are available as shown on D3V/V/VX/D2MV/D2RV Common Accessories.

■ Connector (Sold Separately)

Refer to Terminal Connectors.

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.