
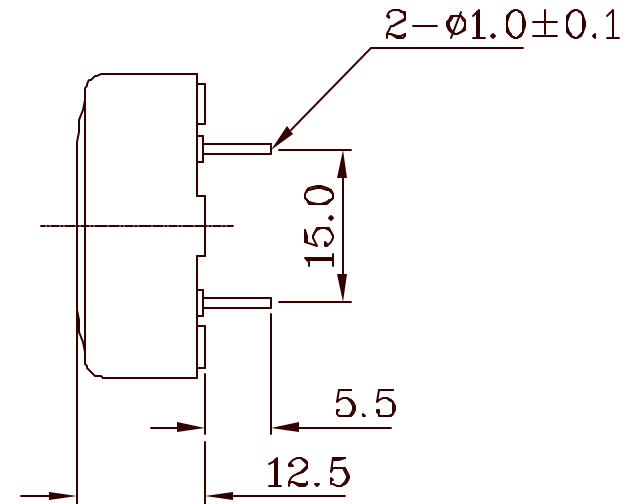


THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY REPRODUCTION IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC IS PROHIBITED.

SPECIFICATIONS

PARAMETERS	VALUES	UNITS
Rated Input Power	0.15	W
Maximum Input Power	0.20	W
Resonant Frequency at Free Air (1V)	1400±20%	Hz
Impedance @ 1.6KHZ	8±20%	Ohm
Minimum Sound Pressure Level @ 1.4 kHz / 10 cm	78	dBA
Operating Temperature Range	-20 ~ +70	°C
Storage Temperature Range	-40 ~ +80	°C
Weight	10	g


REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	11/8/01	
A	FREQUENCY ON MINIMUM SPL	7/15/02	S.J.
B	REVISED SPL. PIN LENGTH	2/19/03	S.J.

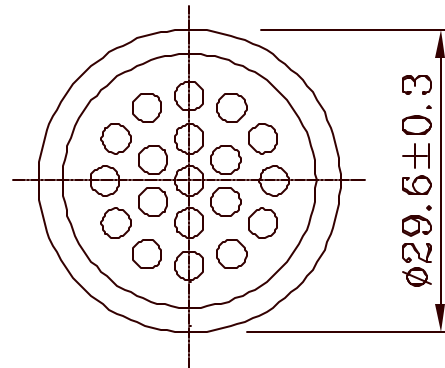

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.

FILE NAME
AT-41.DWG

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± 0.0 ± XXX ±		 projects® unlimited Dayton, Ohio	
APPROVALS DRAWN <i>RABL</i> 11/01 CHECKED APPROVED <i>S.J.</i> 11/08/01		SPEAKER AUDIO TRANSDUCER AT-41	
SIZE A	MATERIAL	DRAWING NO. AT-41	
DO NOT SCALE DRAWING	SCALE N/A	MAX. WT.	SHEET 1 OF 1