

IEC Appliance Inlet C14, Snap-in Mounting, Front Side, Solder or Quick-connect Terminal



C14  
  
 70 °C

**Description**

- Panel Mount:  
Snap-in version, from front side
- Appliance Inlet, Pin temperature 70 °C Protection class I
- Solder terminals

**Approvals**

- UL File Number: E132270
- CSA File Number: 73690

**Characteristics**

- Designed for standard applications
- Qualified for use in equipment according IEC/EN 60950

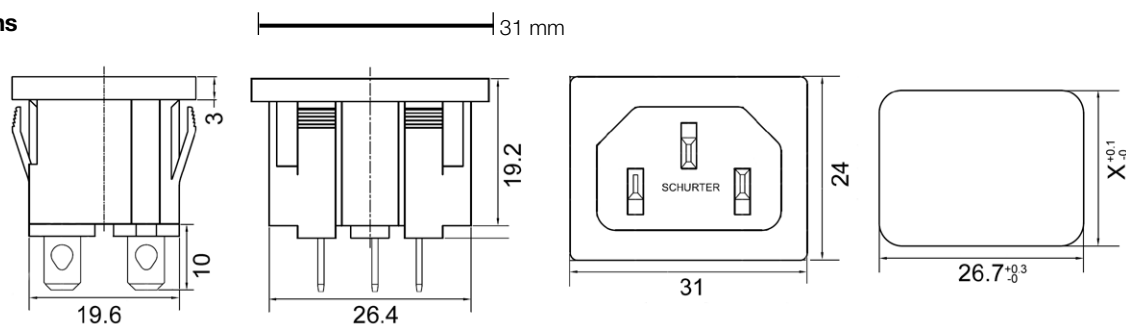
**References****Weblinks**

[pdf](#), [html](#), [General Product Information](#), [Approvals](#), [RoHS](#), [CHINA-RoHS](#), [Mating Connectors](#), [e-shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [Accessories](#)

**Technical Data**

Ratings IEC	10A / 250VAC; 50Hz
Ratings UL/CSA	15A / 250VAC; 60Hz
Dielectric Strength	> 2kVAC between L-N > 2kVAC between L/N-PE (1 min/50Hz)
Allowable Operation Temp.	-25 °C to +70 °C
Degree of Protection	from front side IP 30 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class 1 acc. to IEC 61140
Terminal	Solder
Panel Thickness s	Snap-in from 0.8mm to 2mm universal
Material: Housing	Thermoplastic, black, UL 94V-0

Appliance Inlet	C14 acc. to IEC/EN 60320-1 UL 498, CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 10A, Protection Class 1
-----------------	---

**Dimensions**

Terminals: 4.8x0.8  
 X=20.3: 0.8-1.2  
 X=20.5: 1.3-2.0

**Variants**

Terminal	Order Number
Solder	4300.0704

**Packaging unit** 50 Pcs

## Mating Outlets/Connectors

### Category / Description



[Appliance Inlet Overview complete](#)

IEC Appliance inlet C16	0169
-------------------------	------

[Appliance Inlet further types to 0711](#)

[Appliance Outlet Overview complete](#)



IEC Appliance Outlet F, Screw-on Mounting, Front Side, Solder Terminal	4787
--	------

IEC Appliance Outlet F, Snap-in Mounting, Front Side, Solder or Quick-connect Terminal	4788
--	------

IEC Appliance Outlet F or H, Screw-on Mounting, Front Side, Solder, PCB or Quick-connect Terminal	5091
---	------

IEC Appliance Outlet F or H, Screw-on Mounting, Front Side, Solder or Quick-connect Terminal	5092
--	------

[Appliance Outlet further types to 0711](#)

[Connector Overview complete](#)



IEC Connector C15, Rewireable, Straight	0101
---	------

IEC Connector C15A, Rewireable, Straight	0102
--	------

IEC Connector C15A, Rewireable, Straight	0102-G
--	--------

IEC Connector C15A, Rewireable, Angled	0112
--	------

IEC Connector C13, Rewireable, Angled	4012
---------------------------------------	------

[Connector further types to 0711](#)

...

[Power Cord Overview complete](#)



Power Cord with IEC Connector C13, Angled	0311
---	------

Power Cord with IEC Connector C13, Angled	3011
---	------

Power Cord with IEC Connector C13, Angled	3012
---	------

Power Cord with IEC Connector C13, Angled	3013
---	------

Power Cord with IEC Connector C13	3020
-----------------------------------	------

[Power Cord further types to 0711](#)

...

[Power Supply or Interconnection Cord Overview complete](#)



Divers Power Supply and Interconnection Cords 10 A	Kabelverbindung/10 A
--	----------------------

[Power Supply or Interconnection Cord further types to 0711](#)