11	4155324	D Sub Str PCB Plug 9 Way
12	4155336	D Sub Str PCB Plug 15 Way
13	4155348	D Sub Str PCB Plug 25 Way
14	4155350	D Sub Str PCB Plug 37 Way
15	4155361	D Sub Str PCB Plug 50 Way

1	2	3	4

MATERIAL:
INSULATOR: PBT+30% GLASS FIBER
UL94V-0
PIN CONTACTS: BRASS
GOLD PLATED & TIN PLATED
SHELL: STEEL,SPCC
NICKEL PLATED OR TIN PLATED

ELECTRICAL DATA:
RATED VOLTAGE: 350V AC
RATED CURRENT: 5A
WITHSTAND VOLTAGE: 500V AC(RMS)
INSULATION RESISTANCE: OVER 1000 MΩ
CONTACT RESISTANCE: 5 MΩ AT 1A
TEMPERATURE: -40°C~100°C

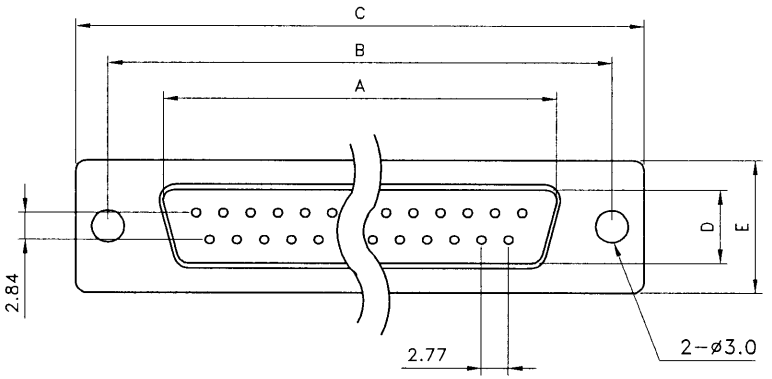

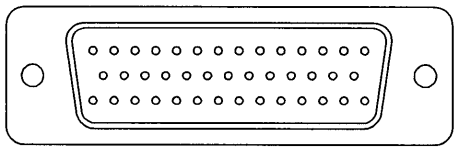

50 POSITIONS

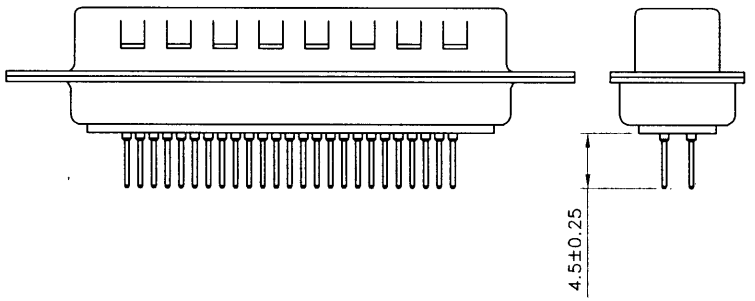

HOW TO ORDER
5502-XXP-XX-XX

- CS: REAR RIVET
- CC: FRONT RIVET
- BR: BOARDLOCK-NUT RIVET
- BRJ: HEX SCREW + HEX NUT
- 01:FULL GOLD
- 02:SELECTIVE GOLD
- P: MACHINE PIN MALE
- NO. OF POSITIONS



REAR RIVET

A



FRONT RIVET

B



BOARDLOCK-NUT
(W/ CLIP POST)



HEX SCREW
+ HEX NUT

C

POSITIONS	A	B	C±0.5	D	E
9	16.92	24.99	30.81	8.38	12.50
15	25.25	33.32	39.14	8.38	12.50
19	30.60	38.86	44.80	8.38	12.50
23	35.90	44.30	50.30	8.38	12.50
25	38.96	47.04	53.04	8.38	12.50
37	55.42	63.50	69.32	8.38	12.50
50	52.81	61.11	66.93	11.07	15.37

REV	DATE	FILE	BY
E			
D			
C			
B			
A	11-11-1999	5502-XXP-XX-XX	Jerry Chen

DRAWN: Jerry Chen

CHECKED: PETER HUANG

GENERAL TOLERANCE: ±0.2

UNIT: MM

SCALE:

SHEET: 1 / 1

PROJECTION:

NELTRON INDUSTRIAL CO.,LTD

DESCRIPTION: D-SUB STANDARD DIP PCB MACHINE PIN

PART NO: 5502-XXP

SIZE A4

D