


ANSMANN reserves the right to modify and improve at any time the product designed in this data sheet without prior notice. Therefore we reserve the right to modify and improve at any time the product designed in this data sheet without prior notice.

Technische Daten Akkupack/
technical data rechargeable battery pack

- Nominalspannung/
nominal voltage : 7.2V
- Nominalkapazität
nominal capacity : 3000mAh discharge at 0.2C
- Minimumkapazität
minimum capacity : 2700mAh at 0.2C
2400mAh at 1.0C 6.0V end discharge voltage
ambient temperature 20°C
- Standardladung/
standard charge : 300mA for 14...16hours at 20°C
- Schnellladung/
fast charge : 3000mA for 1.1hours at 20°C
- Ladeverfahren/
charging method : -dV 30...60mV
- Erhaltungsladung/
trickle charge : 35...150mA
- Lebenserwartung/
life expectancy : >500 Zyklen/cycles bei/at IEC standard
- Schutzart/
protection : IP40
- Approbation/
approval : CE
- Gehäuse/
housing : Akkugehäus schwarz ABS/
battery case black ABS
- Betriebstemperatur/
operating temperature : 0°C.....+25C
- Lagertemperatur/
storage temperature : -25°C.....+50°C
- Gewicht/
weight : ca. xxxg inkl. Verpackung und Zubehör/
approx. xxxg incl. package and accessories
- Verpackung/
packaging : Einzelverpackung, XXXXXmm (LxBxH)
individual package, XXXXXmm (LxWxH)

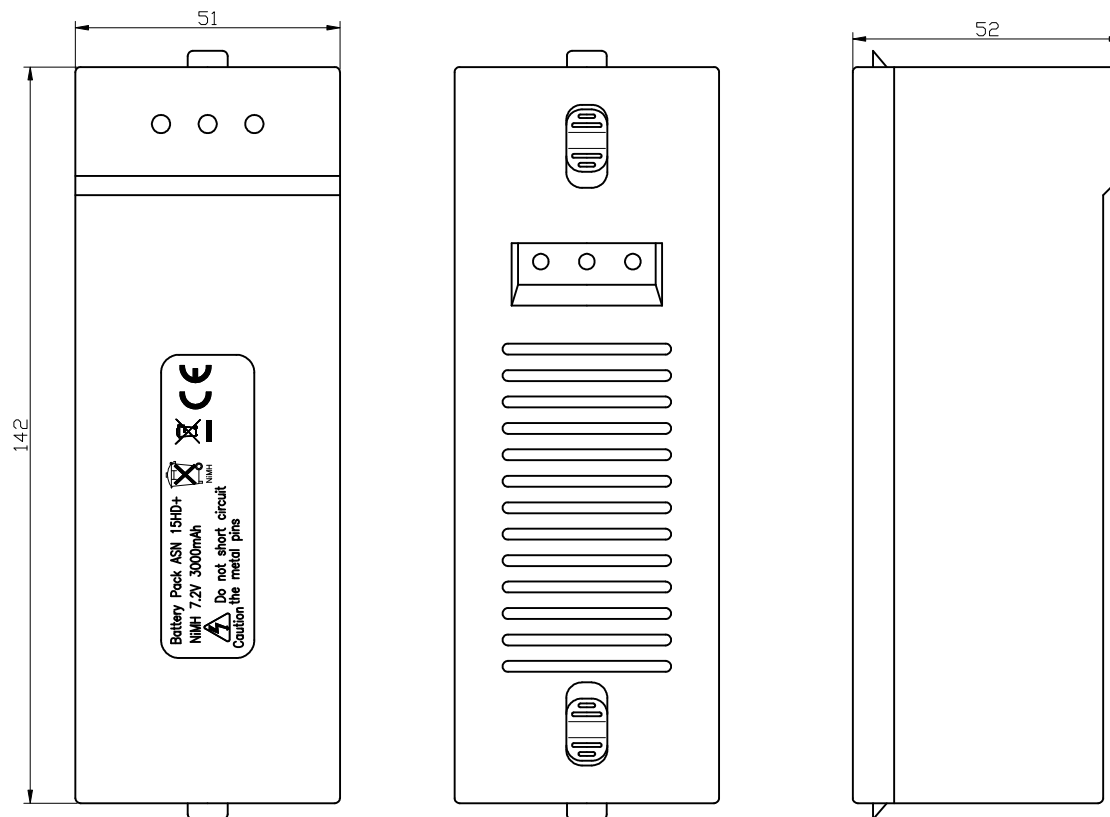

Verwendungsbereich/Application range für Anfrage/for inquiry xxx/xx				Zul. Abweichung/ Allowable deviation	Oberfläche/ Surface	Maßstab/Scale 1:1	Gewicht/Weight
				Werkstoff/Work material, Modell-Nr.			
				2008 Datum/Date	Name	Zeichnungsname/Drawing name	
				Erstellt/ Drawn by	16.01.	SP	Akkupack für ASN 15 HD+/ battery pack for ASN 15 HD+
				Zeichnungsnummer/Drawing number		Blatt/ Sheet	
				Artikelnummer/Part number		3002582	
				1			
V0	---	17.01.08	KK	ANSMANN			
Version	Änderung/Change	Datum/Date	Name	Ursprung/Origin	Proj. XX/XX/XX	Ersatz für/Replaced by	Ersatz durch/Replacement through