




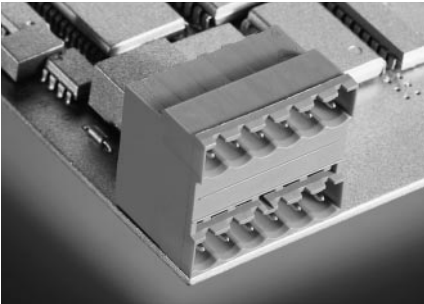

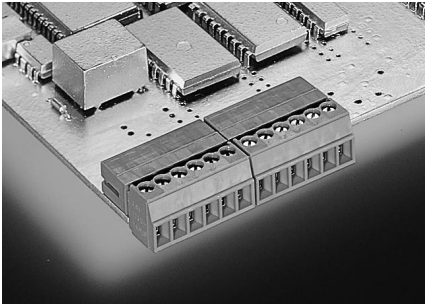

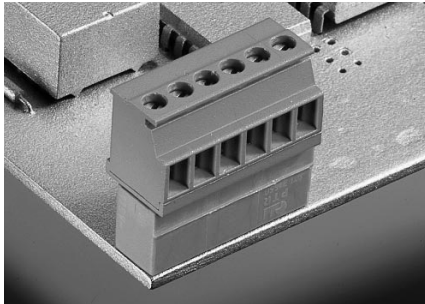


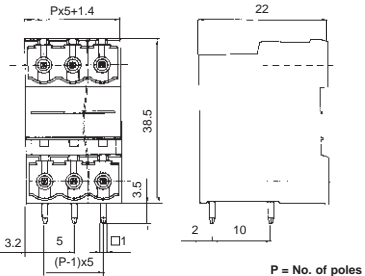
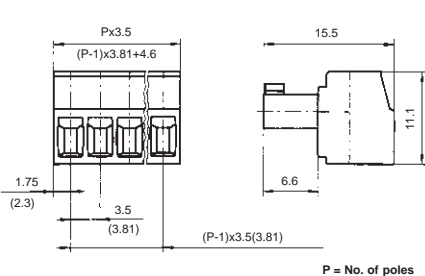
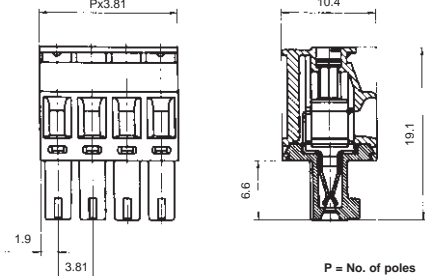


Horizontal 975H Series		In-line 1550 Series		Vertical 1700 Series							
<ul style="list-style-type: none"> ● Block double decker sockets ● 5.0mm pitch ● In-line pins ● Closed ends 		<ul style="list-style-type: none"> ● Plug-in header ● 3.81mm pitch ● Rising clamp mechanism 		<ul style="list-style-type: none"> ● Plug-in header ● 3.81mm pitch ● Rising clamp mechanism 							
											
Part number	20.975H/**	Part number	21.1550/**	Part number	21.1700/**						
Number of poles	2-24 poles	Number of poles	2-20 poles	Number of poles	2-20 poles						
**Insert required No. of poles		**Insert required No. of poles		**Insert required No. of poles							
Ratings											
  		  		  							
	UL 1059	CSA 22.2 No.158	DIN VDE 0627		UL 1059	CSA 22.2 No.158	DIN VDE 0627		UL 1059	CSA 22.2 No.158	DIN VDE 0627
Rated voltage	300 V	300 V	250 V	Rated voltage	300 V	300 V	160 V	Rated voltage	300 V	300 V	160 V
Rated current	15 A	15 A	12 A (T60)	Rated current	8 A	8 A	9 A (T60)	Rated current	8 A	8 A	9 A (T60)
Rating impulse voltage/dirt level	4.0 kV/3			Rating impulse voltage/dirt level	4.0 kV/3			Rating impulse voltage/dirt level	4.0 kV/3		
Rated torque/screw size	0.4 Nm/M2			Rated torque/screw size	0.4 Nm/M2			Rated torque/screw size	0.4 Nm/M2		
Wire size	AWG 28-16			Wire size	AWG 28-16		1.5mm ²	Wire size	AWG 28-16		1.5mm ²
Maximum rated cross section											
Single wire (solid)		1.5mm ²		Single wire (solid)		1.5mm ²					
Stranded wire (flexible)		1.0mm ²		Stranded wire (flexible)		1.0mm ²					
Stranded wire with ferrules		1.0mm ²		Stranded wire with ferrules		1.0mm ²					
Materials											
Insulating material		PA		Insulating material		PA					
Flammability class		UL94 V-0		Flammability class		UL94 V-0					
Temperature range		-30°C/+105°C		Temperature range		-30°C/+105°C					
Contact PIN		Cu		Terminal block		CuZn					
Contact		CuSn		Contact		CuSn					
Colour		RAL 6018		Colour		RAL 6018					
Green		RAL 6018		Green		RAL 6018					
Green		RAL 6018		Green		RAL 6018					
Green		RAL 6018		Green		RAL 6018					
Dimensions											
Spacing		5.0mm		Spacing		3.81mm (3.5mm)					
PCB hole diameter		1.4mm		Stripped length		7.0mm					
											
Options:		Options: ● 3.5mm pitch		Options: ● Printed terminals		Options: ● Coding					
		● Printed terminals		● Coding							
		● Coding									