



# BATTERY CONTACTS


## BATTERY SPRING & BUTTON CONTACTS

- Economical and reliable contacts are ideal for molded cases with self contained battery compartments
- Single and dual contact designs available for "A", "AA", "AAA", "AAAA" & "N" size batteries
- "Solder tab" design for either wire lead or PC mounting
- Unique spring contacts adjust to variations in battery lengths
- Reliable spring contacts assure low contact resistance and a dependable connection
- Space saving, economical, excellent mechanical construction

## SPRING CONTACT FOR "A" • "AA" • "9V" SIZES




MATERIAL: .012 Phosphor Bronze, Nickel Plate

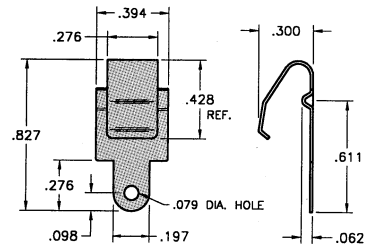


CAT. NO. 5209

## BATTERY CONTACTS FOR "A" • "AA" SIZES

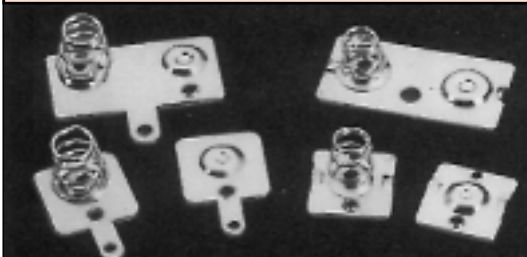


MATERIAL:  
Plate: .020 Steel, Nickel Plate  
Spring: Spring Steel, Nickel Plate

### Dual Contact w/Tabs

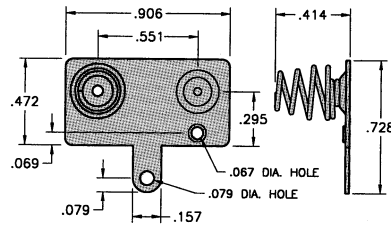


CAT. NO. 5211

### Dual Contact

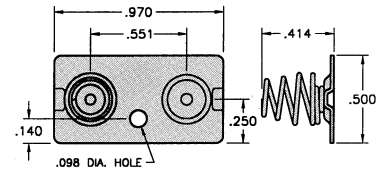


CAT. NO. 5212

### (+) Positive Button

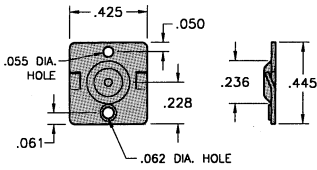


CAT. NO. 5224

### (-) Negative Spring




CAT. NO. 5202

### (+) Positive Button w/Tabs



CAT. NO. 5223

### (-) Negative Spring w/Tabs

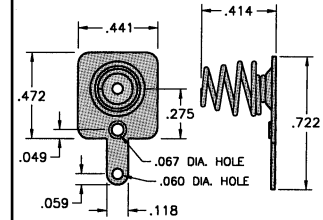


CAT. NO. 5201

## BATTERY CONTACTS FOR "AAA" • "AAAA" • "N" SIZES




MATERIAL:  
Plate: .020 Steel, Nickel Plate  
Spring: Spring Steel, Nickel Plate

### (+) Positive Button




CAT. NO. 5225

### (-) Negative Spring




CAT. NO. 5203

### Dual Contact




CAT. NO. 5214 (Left Side)




CAT. NO. 5213 (Right Side)

### (+) Positive Button w/Tabs



CAT. NO. 5226

### (-) Negative Spring w/Tabs



CAT. NO. 5204