

RTM miniature timers

→ Plug-IN

- Miniature plug-in timer (21 x 27 mm)
- Function A : Delay on energisation
- Multi-range 0.1 s to 10 h
- Excellent noise resistance
- Relay output, 2 or 4 changeover contacts



Specifications


Type	Functions	Relay outputs	Nominal rating	Supply voltage	Absorbed power (W)	Code
RTMA2	A	2 timed changeover	5 A AC	12 VDC	1.5	88 895 201
	A	2 timed changeover	5 A AC	24 VDC	1.2	88 895 202
	A	2 timed changeover	5 A AC	24 VAC	1.7	88 895 203
	A	2 timed changeover	5 A AC	110 VAC	2.6	88 895 206
	A	2 timed changeover	5 A AC	230 VAC	3	88 895 207
RTMA4	A	4 timed changeover	3 A AC	12 V DC	1.5	88 896 201
	A	4 timed changeover	3 A AC	24 V DC	1.2	88 896 202
	A	4 timed changeover	3 A AC	24 V AC	1.7	88 896 203
	A	4 timed changeover	3 A AC	127 V AC	2.6	88 896 206
	A	4 timed changeover	3 A AC	230 V AC	3	88 896 207

Accessories

	Code
PCB base RTMA2	26 532 709
Base for DIN rail mounting RTMA2	26 532 707
Spring clips for DIN rail mounting base	26 532 702
Spring clips for PCB base	26 532 704
PCB base RTMA4	26 532 708
Base for DIN rail mounting RTMA4	26 532 706


Connections

RTMA 2



13 - 14 Supply
 1 - 5 - 9 / 4 - 8 - 12 Timed or instantaneous
 (switch set to "INST") relay outputs

RTMA4




13 - 14 Supply
 1 - 5 - 9 / 2 - 6 - 10 / 3 - 7 - 11 / 4 - 8 - 11
 Timed or instantaneous (switch set to
 "INST") relay outputs

General characteristics


Timing ranges	0.1 → 1s 1 → 10s 0.1 → 1 min 1 → 10 min 0.1 → 1h 1 → 10 h 10 → 100 h
Display accuracy	-0 % / + 10 % at 25 °C of full scale, according to CEI/EN61812
Repetition accuracy (with constant parameters)	± 0.5 %
Drift Temperature	± 0.05 %/°C
Drift Voltage	± 0.2 %/V
Maximum reset time by de-energisation during timed delay	50 ms
Maximum reset time by de-energisation after timing	250 ms
Operating range	±15 % of supply (AC) ±10 % of supply (DC)
Frequency (Hz)	50/60 Hz ± 1 Hz
Immunity from micro power cuts : typical	< 5 ms
Ripple	± 10 % (DC)
Operator factor	100 %
Output specification	
Maximum power rating (resistive)	1250 VA / 120 W
Minimum current	100 mA
Maximum breaking voltage	250 V AC
Type of contacts	AgNi
Max. permitted number of operations at 1 max 250 V AC resistive per hour	600
Electrical life at I max., 250 V AC resistive (number of operations)	10 ⁵
Mechanical life (operations)	10 ⁷
Breakdown voltage conforming to IEC/EN 61812-1 and 60601-1	2 kV at 1 mA / 1 min / 50 Hz
Function and use	
Display of output state by LED	Green : power on yellow : output on
Conformity to standards	CEI/EN61812-1, CEI/EN60601-1, EN50081-2, EN61000-6-2, CEI/EN60601-1-2, Directives BT (73/23/CEE + 93/68/CEE (CE marking)) + CEM (89/336/CEE)
Approvals	UL - cUL
Temperatures limits use (°C)	-20 → +60
Temperature limits stored (°C)	-40 → +70
Insulation coordination (IEC 60664-1)	4 kV / surge category 3
Degree of protection IEC 60529	IP 50 (casing)
Vibration resistance acc. to IEC 68-2-6	f = 10 → 55 Hz A = 0.35 mm
Relative humidity (no condensation)	95 % max (CEI 60068-2-3)
Electromagnetic compatibility	Class 2 according to EN61812-1/A11
Immunity to electrostatic discharges acc. IEC/EN 61000-4-2	Level III (Air 8 K : contact 6kV)
Immunity to electrostatic fields acc. ENV 50140/204 (IEC 1000-4-3)	Level III (10 V/m : 26 MHz to 1 GHz / 900 MHz)
Immunity to rapid transient bursts acc. to IEC 1000-4-4	Level III (Direct 2 kV : coupled 1kV)
Immunity to radio frequency in common mode acc. to ENV (CEI 1000-4-6)	Level III (10 V (rms) : 0.15 MHz to 80 Mhz)
Immunity to shock waves according to IEC/EN 61000-4-5	AC : level III (common mode 2 kV, differential mode : 1 kV DC : MC/MD : 0.5 kV
Immunity to voltage dips and breaks acc. to IEC 1000-4-11	30 % / 10 ms 60 % / 100 ms / 1 s > 95 % 5 s
Mains-borne and radiated emissions acc. to EN 55022 (EN 55011 Group 1)	Class B
Material housing	Self-extinguishing
Weight (g)	55

Dimensions


Base for DIN rail mounting
RTMA2 - 26 532 707




Base for DIN rail mounting
RTMA4 - 26 532 706




Spring clip for DIN rail base
26 532 702




Spring clip for PCB base
26 532 704




PCB base RTMA4 - 26 532 708

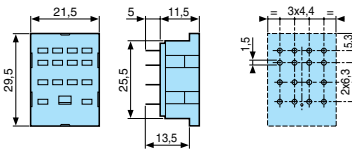

PCB base RTMA2
26 532 709

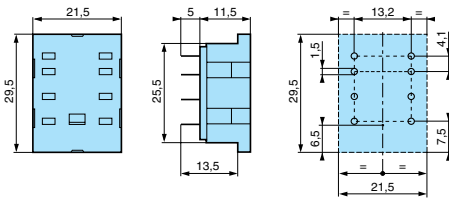


RTMA2 - RTMA4

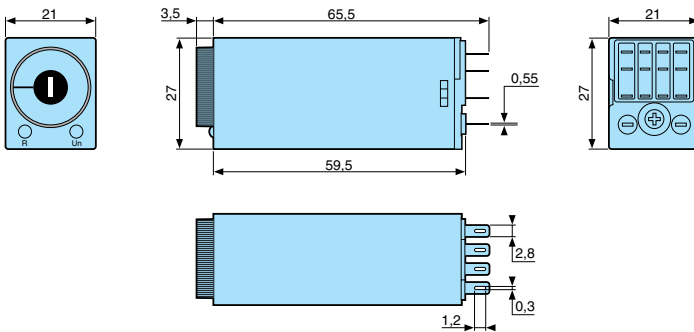


Curves

RTMA2



2 relays

RTMA4



4 relays

Other information

For single-range versions, please consult us.

