


Vertical 101 Series


- Standard profile 5mm pitch
- Solid block construction

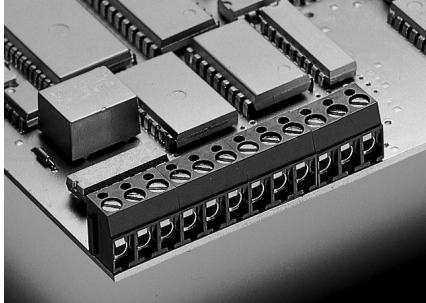

Part number 20.101/** SB
Number of poles 2-12 poles
**Insert required No. of poles

Horizontal 105 Series


- Standard profile 5mm pitch
- Modular interlocking construction

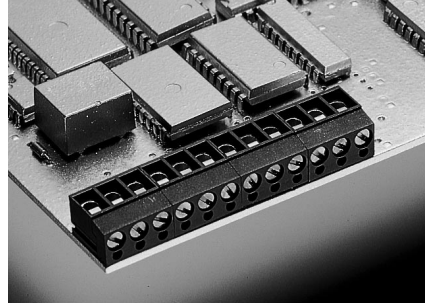

Part number 20.105/**
Number of poles 2-12 poles
**Insert required No. of poles




Vertical 200 Series

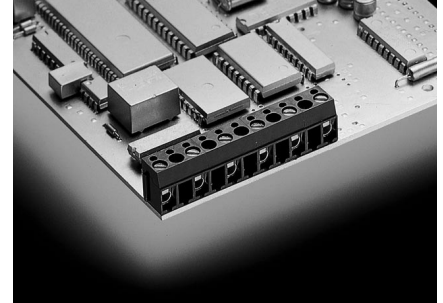


- Standard profile 10mm pitch
- Modular interlocking construction






Part number 20.200/**
Number of poles 2-12 poles
**Insert required No. of poles

Ratings

			
	UL 1059	CSA 22.2 No.158	EN 60998
Rated voltage	300 V	300 V	250 V
Rated current	15 A	15 A	24 A (T60)
Wire size	AWG 22-14	AWG 22-14	2.5mm ²
Test voltage			2.0 kV
Rated torque/screw size			0.5 Nm/M3

			
	UL 1059	CSA 22.2 No.158	EN 60998
Rated voltage	300 V	300 V	250 V
Rated current	15 A	15 A	24 A (T60)
Wire size	AWG 22-14	AWG 22-14	2.5mm ²
Test voltage			2.0 kV
Rated torque/screw size			0.5 Nm/M3

			
	UL 1059	CSA 22.2 No.158	EN 60998
Rated voltage	300 V	300 V	750 V
Rated current	15 A	15 A	24 A (T60)
Wire size	AWG 22-14	AWG 22-14	2.5mm ²
Test voltage			3.0 kV
Rated torque/screw size			0.5 Nm/M3

Maximum rated cross section

Single wire (solid)	2.5mm ²
Stranded wire (flexible)	1.5mm ²
Stranded wire with Ferrules	1.5mm ²

Single wire (solid)	2.5mm ²
Stranded wire (flexible)	1.5mm ²
Stranded wire with Ferrules	1.5mm ²

Single wire (solid)	2.5mm ²
Stranded wire (flexible)	1.5mm ²
Stranded wire with Ferrules	1.5mm ²

Materials


Insulating material	PA
Flammability class	UL94 V-0
Temperature range	-30°C/+105°C
Terminal block	CuZn
Wire guard	stainless steel
Colour	
Grey	RAL 7016

Insulating material	PA
Flammability class	UL94 V-0
Temperature range	-30°C/+105°C
Terminal block	CuZn
Wire guard	stainless steel
Colour	
Grey	RAL 7016

Insulating material	PA
Flammability class	UL94 V-0
Temperature range	-30°C/+105°C
Terminal block	CuZn
Wire guard	stainless steel
Colour	
Grey	RAL 7016


Dimensions

Spacing	5.0mm
PCB hole diameter	1.3mm
Stripped length	7.0mm

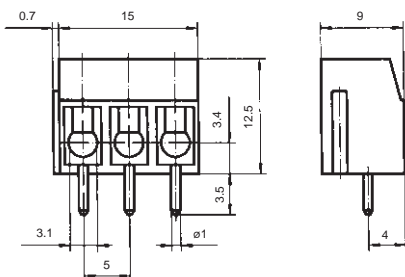


- Options: ● Modular interlocking construction
● 5.08mm PIN pitch version available
● Printed terminals

Spacing	5.0mm
PCB hole diameter	1.3mm
Stripped length	6.0mm

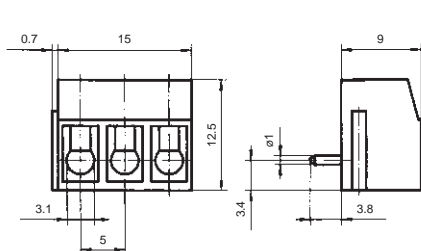

- Options: ● 5.08mm PIN pitch version available
● Printed terminals

Spacing	10.0mm
PCB hole diameter	1.3mm
Stripped length	7.0mm

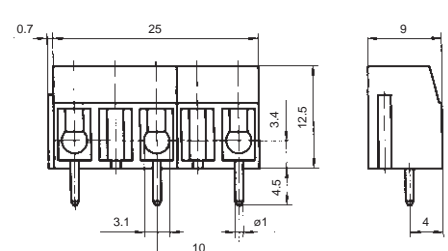

- Options: ● Printed terminals