


M 120/35.F


Spacing 35 mm (1.38")

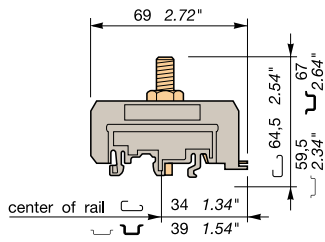

1 stud M8

M 300/42.F

Spacing 42 mm (1.65")

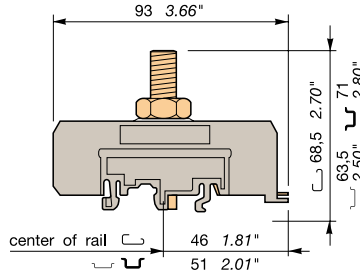


1 stud M10

M 35/26.FF

Spacing 26 mm (1.02")

END OF SERIES

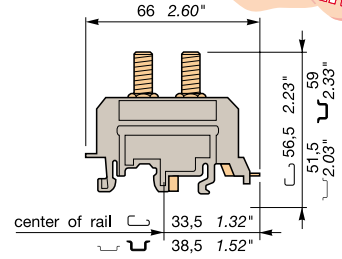

2 studs M6 linked by
1 removable bar 15 x 4 mm



Color	Type	Part number
Grey	M 120/35.F	1SNA 115 147 R1600



Color	Type	Part number
Grey	M 300/42.F	1SNA 115 150 R2500



Color	Type	Part numbers
Grey	M 35/26.FF	1SNA 115 140 R2300
Beige V0	M 35/26.FF.V0	1SNA 195 140 R2400

FEC: 145355

Characteristics

Wire size	DIN	NFC	UL	CSA
	Lug	2.5-70 mm ²	6-95 mm ²	2-250 MCM
Bar	25 x 5 mm		1" x .20"	
Wire-clamp	IEC	IEC		
Voltage	Without partition			
	With partition			
Pulse	8 kV	8 kV		
Pollution degree	3	3		

Current	DIN	NFC	UL	CSA
Rated	150 A	192 A	255 A	270 A

Wire-size	DIN	NFC	UL	CSA
Rated	50 mm ²	70 mm ²	250 MCM	000 AWG

Lug	Central bolt	Wire-clamp	Wire stripping length
H 13 mm			
6 Nm 52 lb.in			

Type	Part numbers
BAEH	th. 12 mm 1SNA 116 934 R0400
BADH	th. 12 mm 1SNA 116 900 R2700
BAMH	th. 9,1 mm 1SNA 114 836 R0000
ECP35	1SNA 113 691 R1600
CPP351	1 block 1SNA 168 206 R1700
CPP352	2 blocks 1SNA 168 205 R1600
CPP353	3 blocks 1SNA 163 418 R2600
CPU35	1SNA 116 514 R0700

Characteristics

Wire size	DIN	NFC	UL	CSA
	Lug	6-150 mm ²	50-150 mm ²	0-500 MCM
Bar	32 x 8 mm		1.26" x .32"	
Wire-clamp	IEC	IEC		
Voltage	Without partition			
	With partition			
Pulse	8 kV	8 kV		
Pollution degree	3	3		

Current	DIN	NFC	UL	CSA
Rated	269 A	269 A	230 A	550 A

Wire-size	DIN	NFC	UL	CSA
Rated	120 mm ²	120 mm ²	500 MCM	500 MCM

Lug	Central bolt	Wire-clamp	Wire stripping length
H 16 mm			
10 Nm 87 lb.in			

Type	Part numbers
BAEH	th. 12 mm 1SNA 116 934 R0400
BADH	th. 12 mm 1SNA 116 900 R2700
BAMH	th. 9,1 mm 1SNA 114 836 R0000
ECP42	1SNA 113 692 R1700
CPP421	1 block 1SNA 168 208 R2100
CPP422	2 blocks 1SNA 168 207 R1000
CPP423	3 blocks 1SNA 163 424 R1400
CPU42	1SNA 116 515 R0000

Characteristics

Wire size	DIN	NFC	UL	CSA
	Lug	2.5-50 mm ²	4-35 mm ²	10-2 AWG
Bar	16 x 4 mm		.63" x .16"	
Wire-clamp	IEC	IEC		
Voltage	Without partition			
	With partition			
Pulse	8 kV	8 kV		
Pollution degree	3	3		

Current	DIN	NFC	UL	CSA
Rated	125 A	101 A	115 A	125 A

Wire-size	DIN	NFC	UL	CSA
Rated	35 mm ²	25 mm ²	2 AWG	4 AWG

Lug	Central bolt	Wire-clamp	Wire stripping length
H 10 mm			
4,5 Nm 39 lb.in			

Type	Part numbers
BAEH	th. 12 mm 1SNA 116 934 R0400
BADH	th. 12 mm 1SNA 116 900 R2700
BAMH	th. 9,1 mm 1SNA 114 836 R0000
ECP26	1SNA 113 689 R2400
CPP261	1 block 1SNA 168 202 R1300
CPP262	2 blocks 1SNA 168 201 R1200
CPP263	3 blocks 1SNA 163 403 R2000
CPU26	1SNA 114 882 R0700

15 for ECP 6 for CPU

15 for ECP 6 for CPU

15 for ECP 6 for CPU