




Applications:

Horizontal PDU's have many applications where multiple outlets are required:

- Under floor/overhead distribution.
- Shop fitting, exhibition and display work.
- Office furniture and workshop.
- Laboratory and workstation.
- Robust construction - polycarbonate accessories in an aluminium body.
- 3 meter fitted plug and lead set as standard.
- 230V ac only.
- Plug and sockets to BS1363, fuses to BS1362.

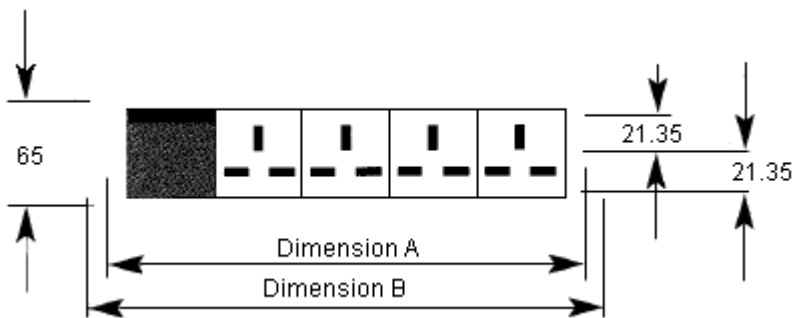

Dimensions : Millimetres

Filter Specifications:

Operating voltage : 220 to 250V ac.
 Current rating : 13 amperes.
 Typical RFI : 56dB at 1MHz
 : 68dB at 10MHz.

Attenuation (common mode)

Surge protection modes : L - N, L - E and N - E.

Maximum clamping voltage : 710V (all modes) at 25A.

Withstanding surge current : <2500A (category A and B mains) one surge.

Response time : <25nS (nano-seconds).

Complies to EN60950 and EN133200.

Specification Table

Description	Type	Number of Sockets	Dimension A	Dimension B	Depth	Part Number
Distribution Unit, 10 Way, 19 Inches	Unswitched	10	566	590	46	PL01903
	Switched					PL01909

Dimensions : Millimetres

Disclaimer This data sheet and its contents (the "Information") belong to the Premier Farnell Group (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. SPC Multicomp is the registered trademark of the Group. © Premier Farnell plc 2009.