

STANDARD RECOVERY DIODES

Stud Version

Features

- High surge current capability
- Avalanche types available
- Stud cathode and stud anode version
- Wide current range
- Types up to 1200V V_{RRM}
- RoHS COmpliant


12 A

Typical Applications

- Battery charges
- Converters
- Power supplies
- Machine tool controls

Major Ratings and Characteristics

Parameters		12F(R)	Units
$I_{F(AV)}$		12	A
	@ T_C	144	°C
$I_{F(RMS)}$		19	A
I_{FSM}	@ 50Hz	265	A
	@ 60Hz	280	A
I^2t	@ 50Hz	351	A ² s
	@ 60Hz	320	A ² s
V_{RRM}	range	100 to 1200	V
T_J	range	- 65 to 175	°C

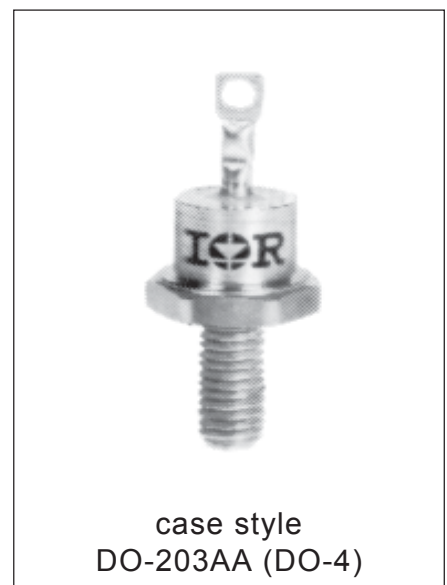

ELECTRICAL SPECIFICATIONS

Voltage Ratings

Type number	Voltage Code	V _{RRM} , maximum repetitive peak reverse voltage V	V _{RSM} , maximum non-repetitive peak reverse voltage V	V _{R(BR)} , minimum avalanche voltage V (1)	I _{RRM} max. @ T _J = 175°C mA
12F(R)	10	100	150	--	12
	20	200	275	--	
	40	400	500	500	
	60	600	725	750	
	80	800	950	950	
	100	1000	1200	1150	
	120	1200	1400	1350	

(1) Avalanche version only available from V_{RRM} 400V to 1200V.

Forward Conduction

Parameter	12F(R)	Units	Conditions
I _{F(AV)} Max. average forward current @ Case temperature	12	A	180° conduction, half sine wave
	144	°C	
I _{F(RMS)} Max. RMS forward current	19	A	
P _R Maximum non-repetitive peak reverse power	7	K/W	10µs square pulse, T _J = T _J max. see note (2)
I _{FSM} Max. peak, one-cycle forward, non-repetitive surge current	265	A	t = 10ms No voltage
	280		t = 8.3ms reapplied
	225		t = 10ms 100% V _{RRM}
	235		t = 8.3ms reapplied
I ² t Maximum I ² t for fusing	351	A ² s	t = 10ms No voltage
	320		t = 8.3ms reapplied
	250		t = 10ms 100% V _{RRM}
	226		t = 8.3ms reapplied
I ² √t Maximum I ² √t for fusing	3510	A ² √s	t = 0.1 to 10ms, no voltage reapplied
V _{F(TO)1} Low level value of threshold voltage	0.77	V	(16.7% × π × I _{F(AV)} < I < π × I _{F(AV)}), T _J = T _J max.
V _{F(TO)2} High level value of threshold voltage	0.97		(I > π × I _{F(AV)}), T _J = T _J max.
r _{f1} Low level value of forward slope resistance	10.70	mΩ	(16.7% × π × I _{F(AV)} < I < π × I _{F(AV)}), T _J = T _J max.
r _{f2} High level value of forward slope resistance	6.20		(I > π × I _{F(AV)}), T _J = T _J max.
V _{FM} Max. forward voltage drop	1.26	V	I _{pk} = 38A, T _J = 25°C, t _p = 400µs rectangular wave

(2) Available only for Avalanche version, all other parameters the same as 12F.

Thermal and Mechanical Specifications

Parameter	12F(R)	Units	Conditions
T_J Max. junction operating temperature range	-65 to 175	°C	
T_{stg} Max. storage temperature range	-65 to 200		
R_{thJC} Max. thermal resistance, junction to case	2	K/W	DC operation
R_{thCS} Max. thermal resistance, case to heatsink	0.5		Mounting surface, smooth, flat and greased
T Allowable mounting torque	1.5 ^{+0-10%}	Nm	Not lubricated threads
	13	lbf.in	
	1.2 ^{+0-10%}	Nm	Lubricated threads
	10	lbf.in	
wt Approximate weight	7 (0.25)	g (oz)	
Case style	DO-203AA (DO-4)		See Outline Table

ΔR_{thJC} Conduction

(The following table shows the increment of thermal resistance R_{thJC} when devices operate at different conduction angles than DC)

Conduction angle	Sinusoidal conduction	Rectangular conduction	Units	Conditions
180°	0.33	0.26	K/W	$T_J = T_J \text{ max.}$
120°	0.41	0.44		
90°	0.53	0.58		
60°	0.78	0.81		
30°	1.28	1.29		

Ordering Information Table

Device Code					
A	12	F	R	120	M
①	②	③	④	⑤	⑥
1 - A = Avalanche diode None = Standard diode	2 - Current rating: Code = $I_{F(AV)}$	3 - F = Standard device	4 - None = Stud Normal Polarity (Cathode to Stud) R = Stud Reverse Polarity (Anode to Stud)	5 - Voltage code: Code x 10 = V_{RRM} (See Voltage Ratings table)	6 - None = Stud base DO-203AA (DO-4) 10-32UNF-2A M = Stud base DO-203AA (DO-4) M5 X 0.8 - (Not available for Avalanche diodes)

Outlines Table

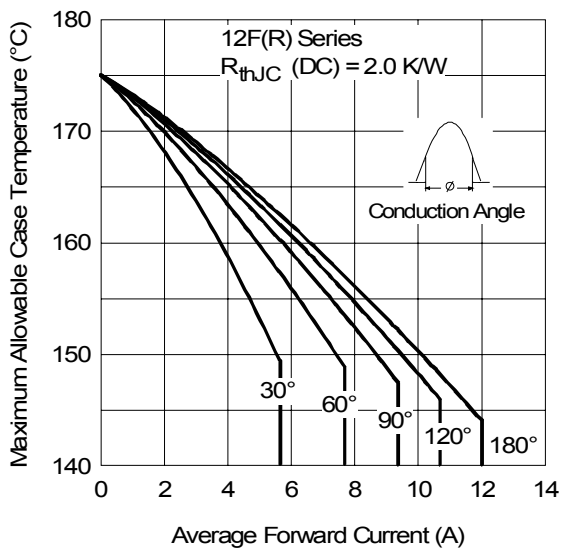
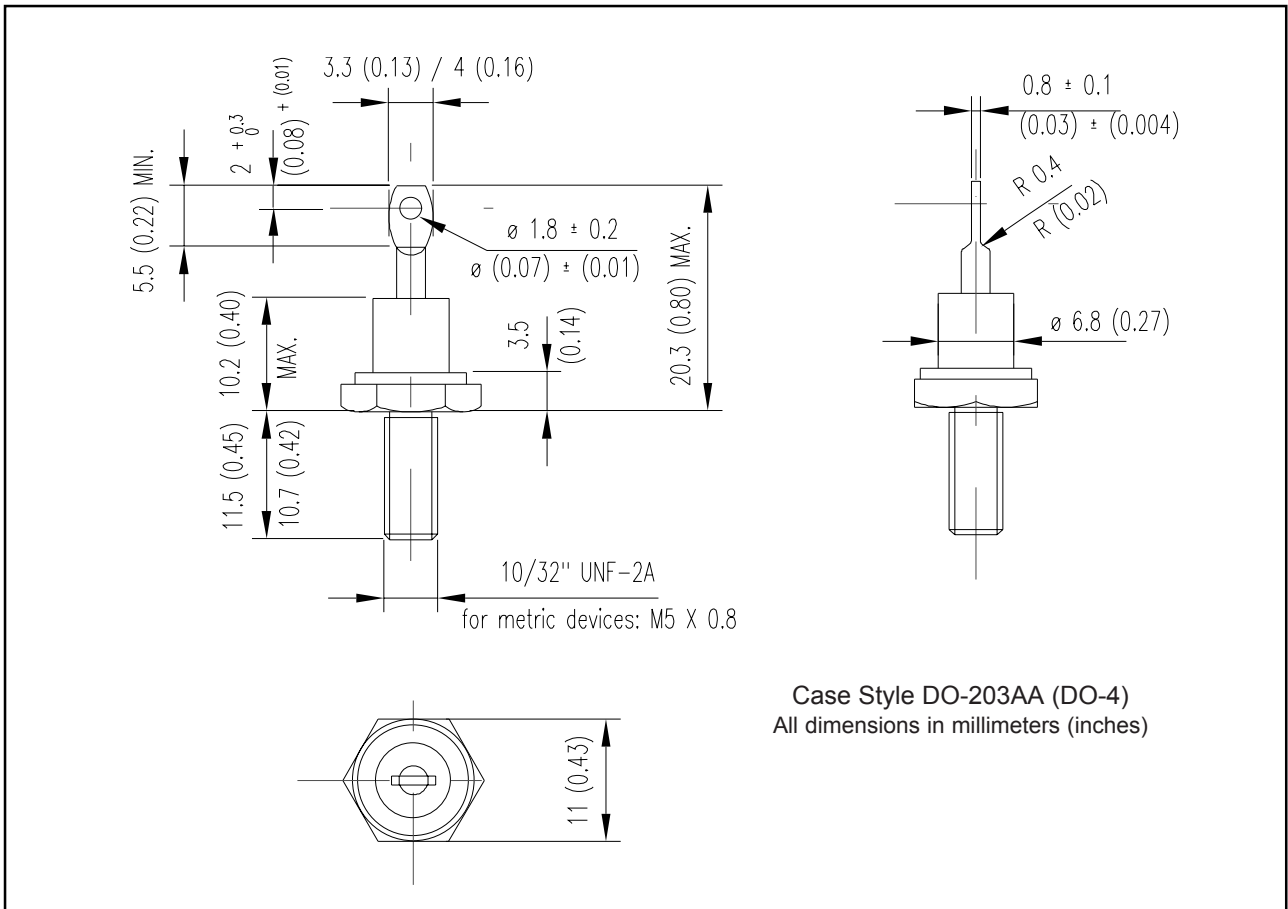


Fig. 1 - Current Ratings Characteristics

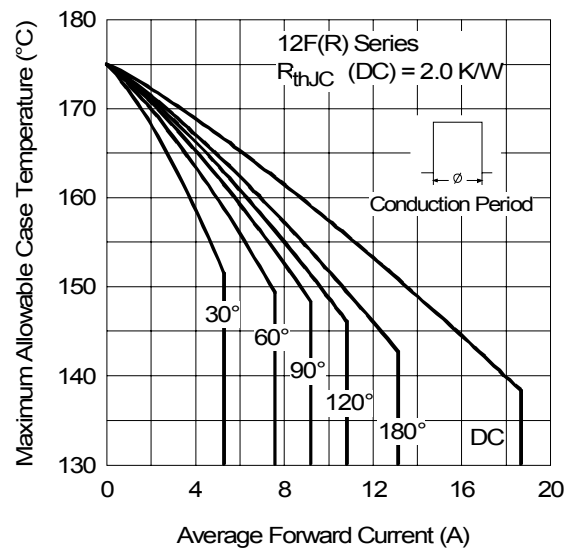


Fig. 2 - Current Ratings Characteristics

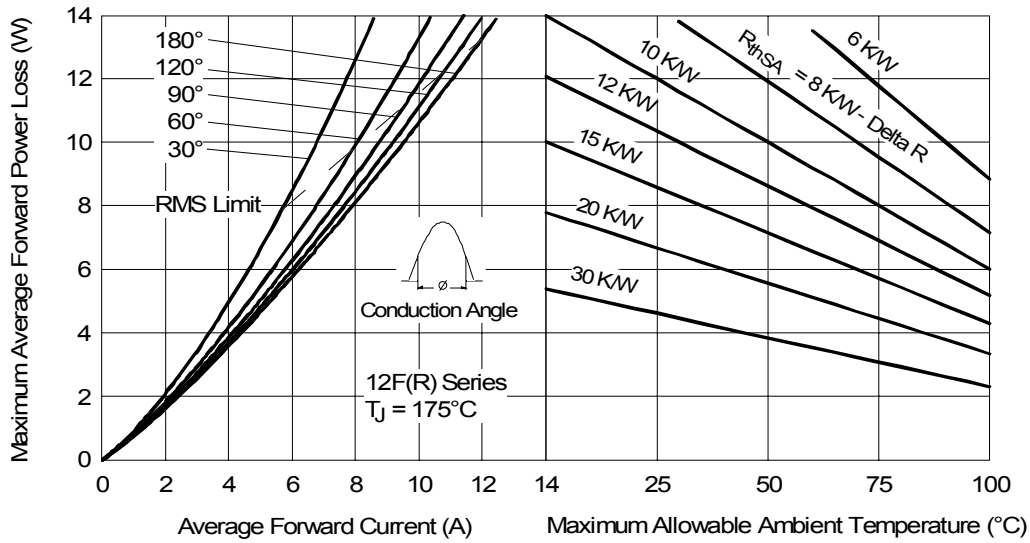


Fig. 3 - Forward Power Loss Characteristics

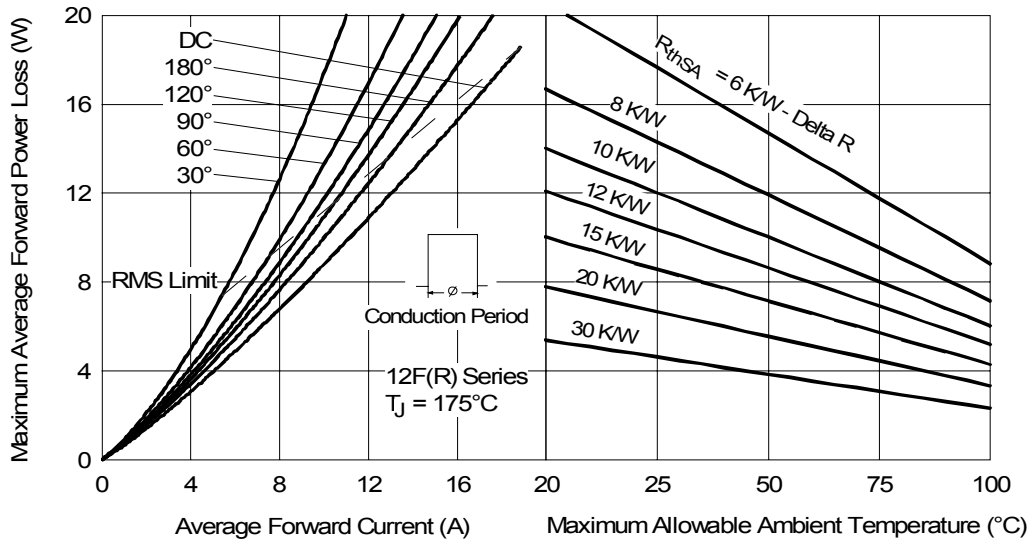


Fig. 4 - Forward Power Loss Characteristics

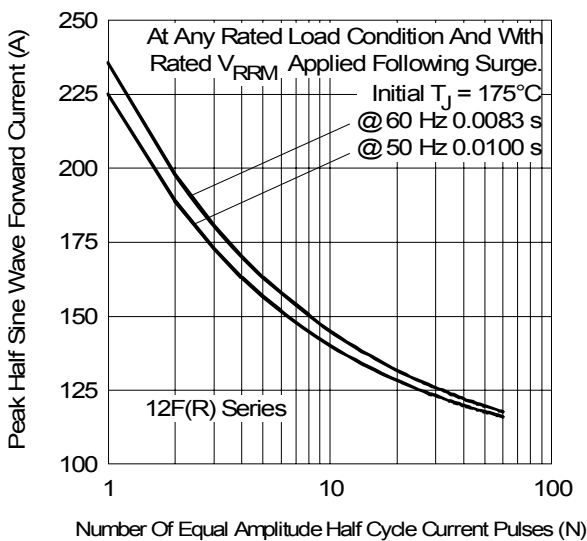


Fig. 5 - Maximum Non-Repetitive Surge Current

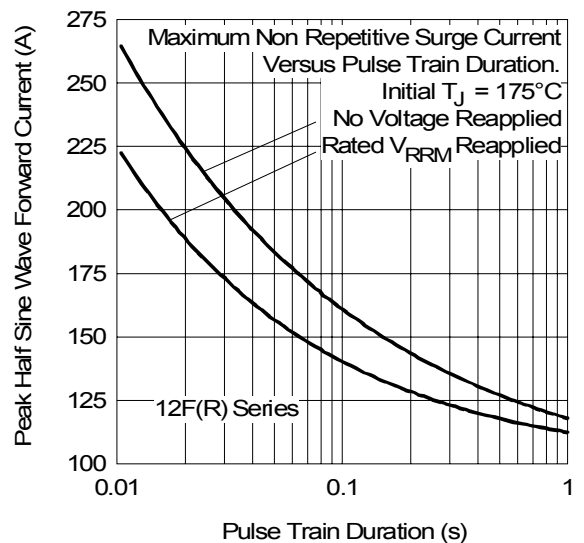


Fig. 6 - Maximum Non-Repetitive Surge Current

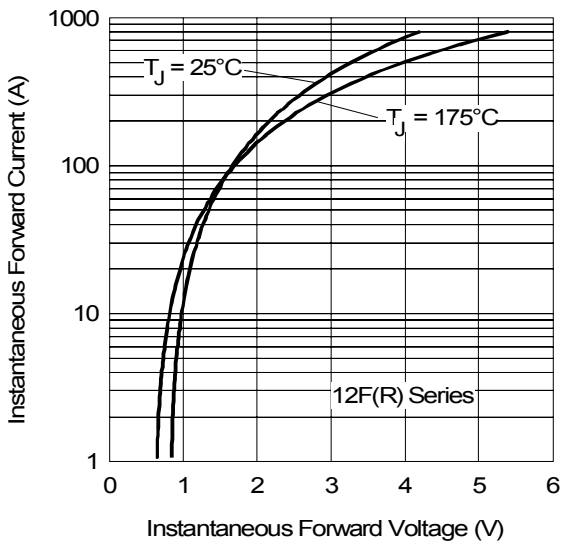


Fig. 7 - Forward Voltage Drop Characteristics

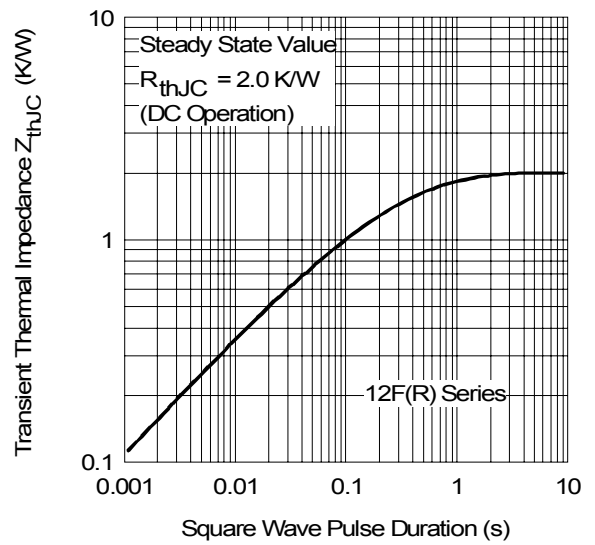


Fig. 8 - Thermal Impedance Z_{thJC} Characteristics

Data and specifications subject to change without notice.
 This product has been designed and qualified for Industrial and Consumer Level.
 Qualification Standards can be found on IR's Web site.