

AMPMODU MOD I Shrouded Headers

- Straight or right angle
- Built-in polarisation and latching
- Gold or tin plated contacts
- 0.79 x 1.57mm posts

Specification:


Housing - Green glass fibre filled polycarbonate UL 94V-1

Contacts - Brass (gold plating) or phosphor bronze (tin plating)


Current Rating - 5A

Mating Connectors:

MOD I Receptacle Housings - Page 47

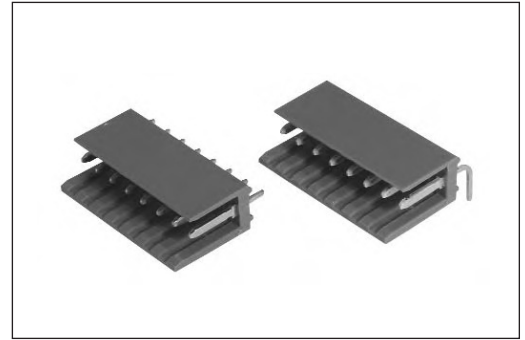


Single Row Straight

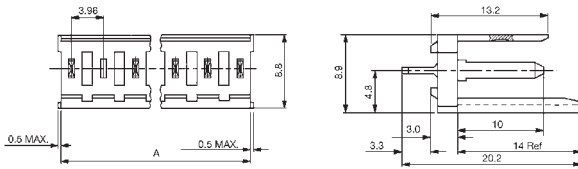

No. of Positions	Dimension A	Part Number	
		0.4µm Gold	Tin
2	6.2	280609-2	280609-1
4	14.2	280610-2	280610-1
6	22.1	280611-2	280611-1
8	30.0	280612-2	280612-1
10	37.9	280613-2	280613-1
12	45.9	280614-2	280614-1

Single Row Right-Angle

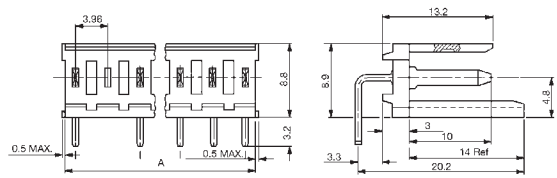

No. of Positions	Dimension A	Part Number	
		0.4µm Gold	Tin
2	6.2	280615-2	280615-1
4	14.2	280616-2	280616-1
6	22.1	280617-2	280617-1
8	30.0	280618-2	280618-1
10	37.9	280619-2	280619-1
12	45.9	280620-2	280620-1

