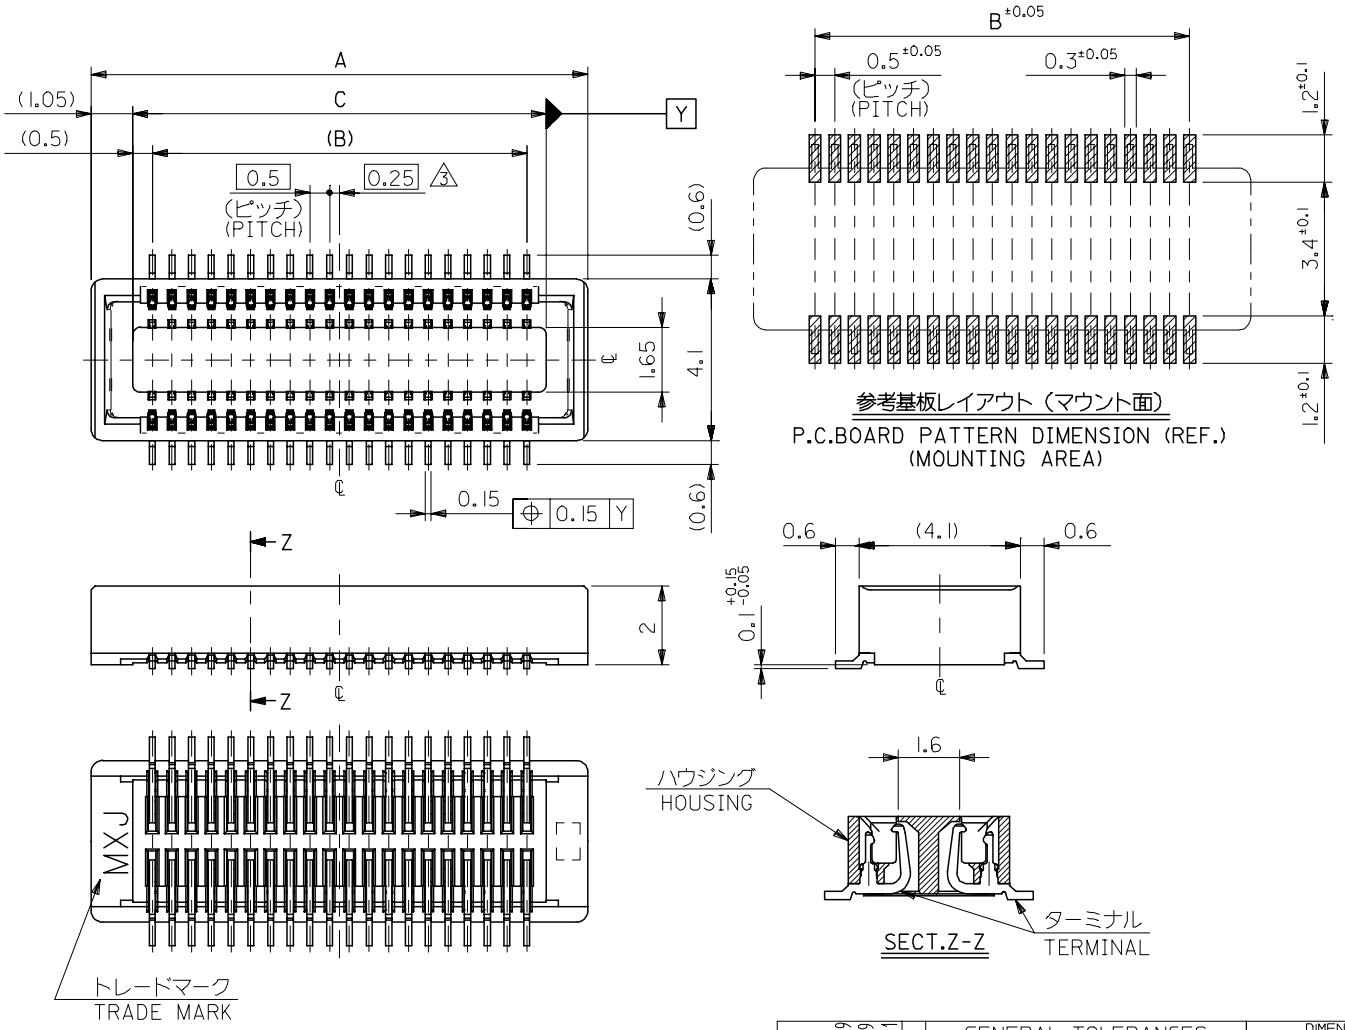

注記 NOTES:

1. 使用材料 MATERIAL
   ハウジング：ポリフタルアミド（ＰＰＡ），
   ガラス充填。UL94V-0，色：黒
   HOUSING:POLYPHUTAL AMIDO(PPA),GLASS FILLED
   UL94V-0,COLOR:BLACK
   ターミナル：リン青銅（ｔ＝0．15）
   TERMINAL:PHOSPHOR BRONZE(t=0.15)
2. メッキ仕様PLATING
   金メッキ 0.25マイクロメートル以上（コンタクト部）
   GOLD(Au) 0.25 MICROMETER MINIMUM
   (CONTACT AREA)
   金メッキ 0.05マイクロメートル以上（テール部）
   GOLD(Au) 0.05 MICROMETER MINIMUM (TAIL AREA)
   下地メッキ：ニッケルメッキ 1.5 マイクロメートル以上
   UNDER PLATING
   : NICKEL 1.5 MICROMETER MINIMUM
   ＊コンタクト部とテール部はニッケルメッキによって
   分断されている金メッキです。
   DIVIDE INTO PARTS THE GOLD PLATING OF
   THE CONTACT PART AND THE TAIL PART BY
   THE NICKEL PLATING.
3. （全極数／2）=偶数の場合に適用。
   APPLY FOR (CIRCUIT/2)=EVEN.
4. 嵌合相手：53885 /500334 シリーズ
   MATE WITH : 53885 / 500334 SERIES.
5. テール平坦度は、0.1MAX.
   TAIL COPLANARITY TO BE 0.1 MAXIMUM.

C	B	A	MATERIAL No.	極数 CIRCUIT
18.0	17.0	20.1	54102-0703	70
15.5	14.5	17.6	-0603	60
13.0	12.0	15.1	-0503	50
10.5	9.5	12.6	-0403	40
8.0	7.0	10.1	-0303	30
5.5	4.5	7.6	-0203	20
4.5	3.5	6.6	54102-0163	16

MODEL No. 54102-***3

REVISED
EC NO: J2005-1175 2004/10/29
DRWN:MUMEDA 2004/10/29
CHKD:KTOYODA 2004/11/01
APPR:NUKITA
DESCRIPTION
REV A

GENERAL TOLERANCES (UNLESS SPECIFIED)

10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3
ANGULAR ±3 °	

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY	SCALE: ---	DESIGN UNITS: METRIC	THIRD ANGLE PROJECTION
DRAWN BY: Y.SAKIYA	DATE: 2004/05/06	TITLE: 0.5 B-TO-B CONN REC HSG ASSY(HGT=2.5) [NI BARRIER]-LEAD FREE-	
CHECKED BY: M.SASAO	DATE: 2004/05/06		
APPROVED BY: M.SASAO	DATE: 2004/05/06	molex MOLEX INCORPORATED	
MATERIAL NO.: SEE CHART		DOCUMENT NO.: SD-54102-006	SHEET NO.: 1 OF 1

SIZE A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

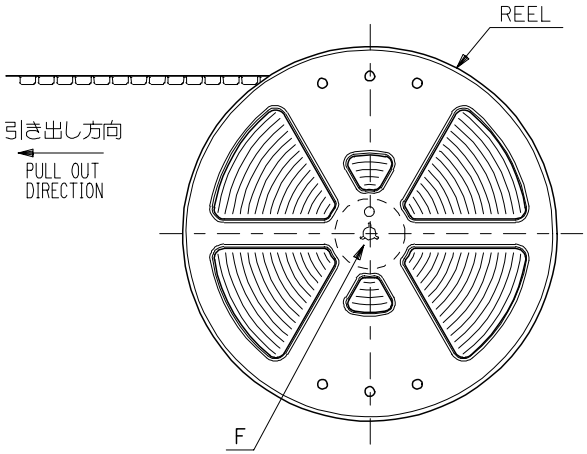

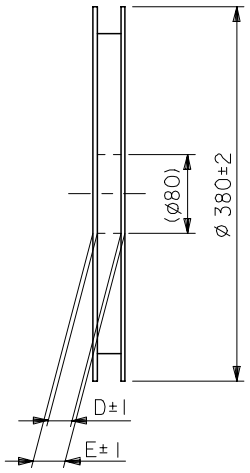



DETAIL F

NOTES

1. 製品詳細寸法については図面 SD-54102-006 を参照下さい。
   RE DETAILED DIMENSION, SEE SD-54102-006.
2. 梱包数量：３０００個／リール
   NUMBER OF CONNECTORS : 3000PCS/REEL
3. リードテープ長さ LEAD TAPE LENGTH

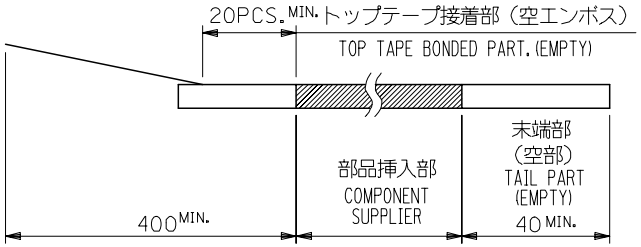

4. トップテープの剥離強度： 0.1 ～ 1.3N {10 ～ 130gf}
   （剥離方向は下図参照）
   尚、本規格値は出荷時に適用。（但し、輸送時に剥離が発生しないこと。）
   PEELING OFF FORCE OF TOP TAPE : 0.1 ～ 1.3N {10 ～ 130gf}
   (PEELING DIRECTION AS SHOWN IN FOLLOWING FIG,)
   THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT.
   PEEL OFF SHOULD NOT BE ALLOWED , DURING TRANSPORTATION.

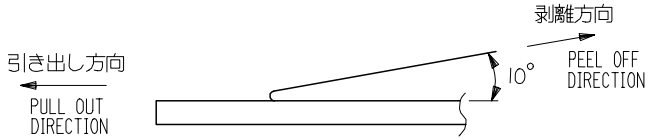

5. 材料(MATERIAL)
   キャリアテープ(CARRIER TAPE)：ポリプロピレン(POLYPROPYLENE)
   トップテープ(TOPTAPE)： PET , PE , PEF
   リール(REEL)：ポリスチレン（PS）<リサイクル材を含む>
   POLYSTYRENE(PS) <RECYCLE MATERIAL CONTAINED>

REVISED
EC NO: J2005-1175 2004/10/29
DRWN:MUMEDA 2004/10/29
CHKD:KTOYODA 2004/11/01
APPR:NUKITA
DESCRIPTION
REV A

GENERAL TOLERANCES (UNLESS SPECIFIED)

10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3
ANGULAR ±3 °	

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY	SCALE: ---	DESIGN UNITS: METRIC	THIRD ANGLE PROJECTION
DRAWN BY: Y.SAKIYA DATE: 2004/05/06	TITLE: EMBSTP PKG FOR 0.5 B/B REC HSG ASSY (H=2.5) [NI BARRIER]-LEAD FREE-		
CHECKED BY: M.SASAO DATE: 2004/05/06			
APPROVED BY: M.SASAO DATE: 2004/05/06	molex MOLEX INCORPORATED		
MATERIAL NO.: SEE CHART	DOCUMENT NO.: SD-54102-007		SHEET NO.: 1 OF 3

SIZE A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

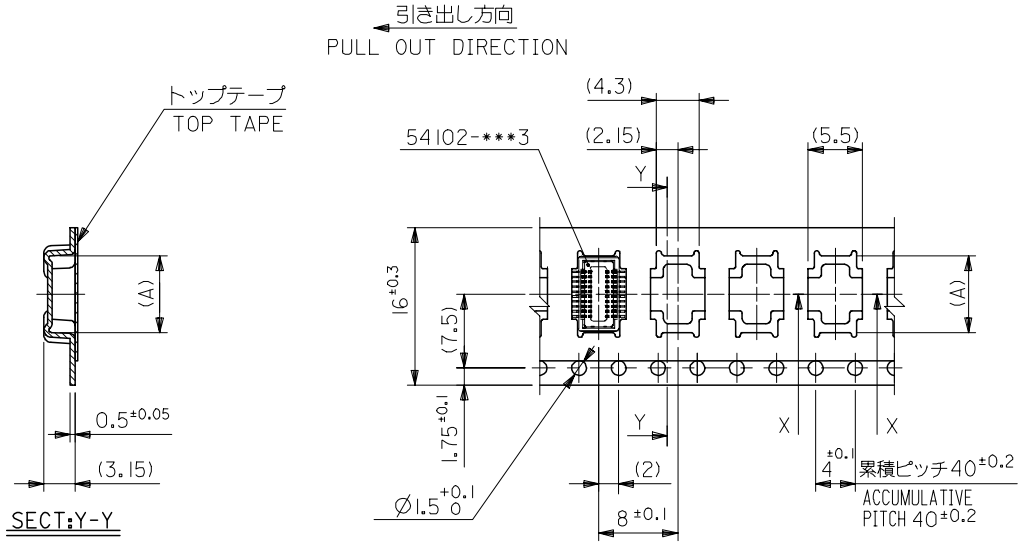



16mm幅キャリアテープ
16mm WIDTH CARRIER TAPE

キャリアテープ幅 CARRIER TAPE WIDTH	E	D	(A)	MATERIAL NO.	極数 CIRCUITS
16	21.4	17.4	7.8	54102-0204	20
			6.8	54102-0164	16

MODEL NO. 54102-***4

REVISED
EC NO: J2005-1175 2004/10/29
DRWN:MUMEDA 2004/10/29
CHKD:KTOYODA 2004/11/01
APPR:NUKITA
DESCRIPTION
REV A

GENERAL TOLERANCES (UNLESS SPECIFIED)

10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3
ANGULAR ±3 °	

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: ---
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: Y.SAKIYA DATE: 2004/05/06
CHECKED BY: M.SASAO DATE: 2004/05/06
APPROVED BY: M.SASAO DATE: 2004/05/06

TITLE: EMBSTP PKG FOR 0.5 B/B REC HSG ASSY (H=2.5) [NI BARRIER]-LEAD FREE-

MOLEX INCORPORATED

MATERIAL NO.: SEE CHART
DOCUMENT NO.: SD-54102-007
SHEET NO.: 2 OF 3

SIZE A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

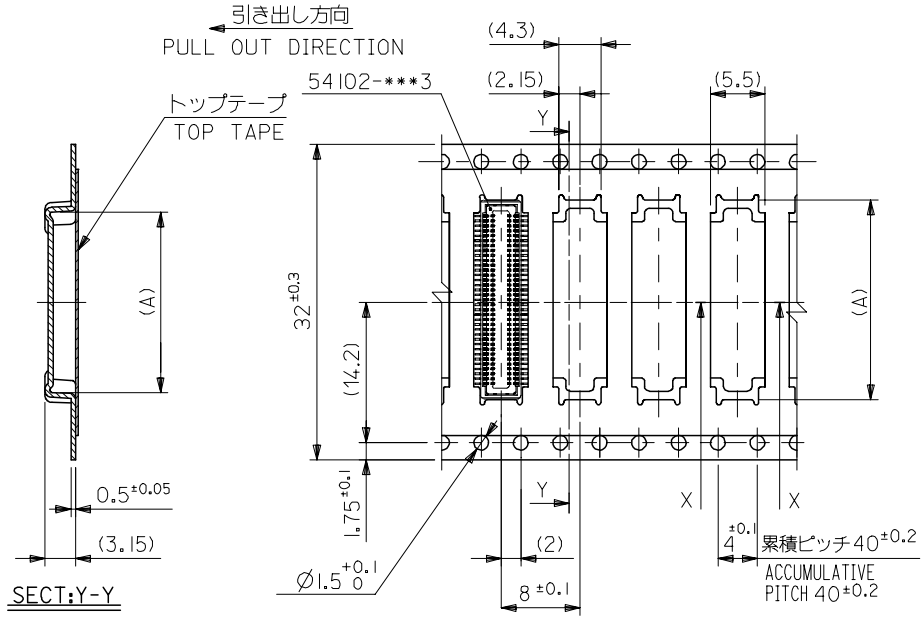

32mm幅キャリアテープ
32mm WIDTH CARRIER TAPE

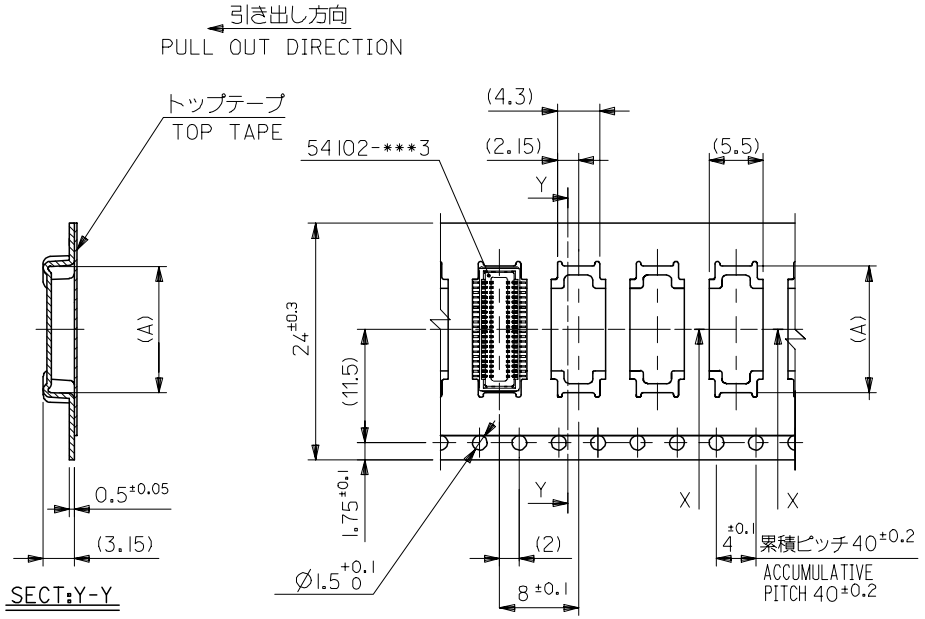

24mm幅キャリアテープ
24mm WIDTH CARRIER TAPE

キャリアテープ幅 CARRIER TAPE WIDTH	E	D	(A)	MATERIAL NO.	極数 CIRCUITS
32	37.4	33.4	20.3	54102-0704	70
			17.8	54102-0604	60
24	29.4	25.4	15.3	54102-0504	50
			12.8	54102-0404	40
			10.3	54102-0304	30

MODEL NO. 54102-***4

REVISED
EC NO: J2005-1175 2004/10/29
DRWN:MUMEDA 2004/10/29
CHKD:KTOYODA 2004/11/01
APPR:NUKITA
DESCRIPTION
REV A

GENERAL TOLERANCES (UNLESS SPECIFIED)

10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3
ANGULAR ±3 °	

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: ---
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: Y.SAKIYA DATE: 2004/05/06
CHECKED BY: M.SASAO DATE: 2004/05/06
APPROVED BY: M.SASAO DATE: 2004/05/06

TITLE: EMBSTP PKG FOR 0.5 B/B REC HSG ASSY (H=2.5) [NI BARRIER]-LEAD FREE-

MOLEX INCORPORATED

MATERIAL NO.: SEE CHART
DOCUMENT NO.: SD-54102-007
SHEET NO.: 3 OF 3
SIZE: A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION