

Actual information about approvals can be found on
<http://www.schurter.com/approvals>



F



70° C

Description

- Panel mount:
Snap-in version from front side
- 2 Functions:
Module of 2 up to 7 outlets, Pin temperature 70 °C, Protection class I
- Solder terminals 3.2 x 0.8 mm

Characteristics

- Qualified for use in equipment according IEC/EN 60950

Other versions on request:


- other panel thickness

Technical data

Ratings IEC	10 A / 250 VAC; 50 Hz
Ratings UL/CSA	15 A / 250 VAC; 60 Hz
Dielectric strength	> 2 kVAC between L-N > 2 kVAC between L/N-PE (1 min/50 Hz)
Allowable operation temp.	-25 °C to 70 °C
Degree of protection	from front side IP30 acc. to IEC 60529
Protection class	Suitable for appliances with protection class I acc. to IEC 61140

Terminals	Solder terminals 3.2 x 0.8 mm
Panel thickness s	Snap-in 1.5 mm tolerance +0.0/-0.1
Materials: Housing	Thermoplastic, black, UL 94V-0
Appliance-inlet /-outlet	F acc. to IEC/EN 60320-2-2, UL 498 CSA C22.2 no. 42 (for cold condition) pin-temperature 70 °C, 10 A, Protection class I

Dimensions

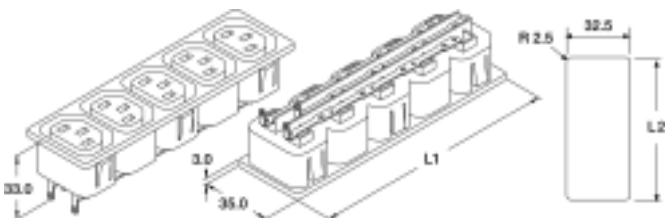

Variants

Order Number	Panel thickness s [mm]	Appliance outlet	Length L1 [mm]	Length L2 [mm]
0909.0001	1.5	2	51	48.3
0909.0011	1.5	3	75	72.3
0909.0021	1.5	4	99	96.3
0909.0031	1.5	5	123	120.3
0909.0041	1.5	6	147	144.3
0909.0051	1.5	7	171	168.3

Packaging unit 120 Pcs