

LED-Element 644

(provisional technical data sheet)

WERMA Signaltechnik
GmbH + Co.
Dürbheimer Straße 15
D-78604 Rietheim-Weilheim
Phone 0049/7424/9557-0
Fax 0049/7424/9557-44

Electrical specifications:

Operating voltage: Unenn = 24V
Current at make: < 0,5A to 24V
Current consumption:

644 X10 75 LED-Blinking light element (40mA DC)
644 X30 75 LED-Rotating light element (70mA DC)

LED-Blinking light element:
Blink frequency: approx. 1Hz

LED-Rotating light element:
Number of revolutions: approx. 120 r.p.m.

Order-No.:

644 X10 75 LED-Blinking light element 24V AC/DC
644 X30 75 LED-Rotating light element 24V AC/DC

X 1 = red 2 = green 3 = yellow 4 = clear 5 = blue

Mechanical specifications:

Material: Polycarbonate
Seal: premounted with each element


Further specification:

Working life: 100.000 h
Weight: approx. 68g
Working Temperature: ta -20°C up to +50°C
Protection rating: IP65 when mounted or with cover cap

Regulations: Conform to current EC regulations. UL-listed.

All specifications refer to Unenn and room temperature!

Seal premounted

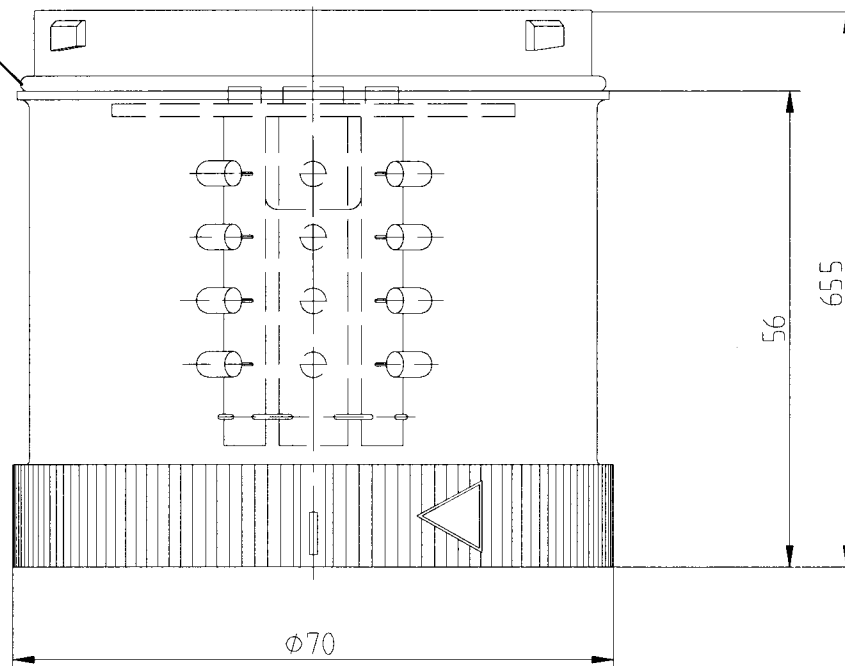

	Drawn up	proved	released	Data-sheet-No.
Name	E. Rudischhauser	<i>nes</i>	<i>fo</i>	000 644 503
Date	2001-11-06	2001-11-06	2001-11-04	Page 1 of 1