

Customer Information Sheet

DRAWING No.: M22-60330XX

SHEET 2 OF 2




IF IN DOUBT - ASK

(C)

NOT TO SCALE

THIRD ANGLE PROJECTION


ALL DIMENSIONS IN mm

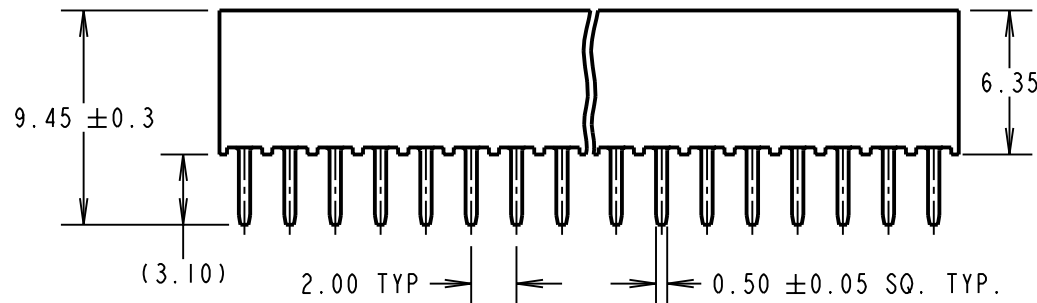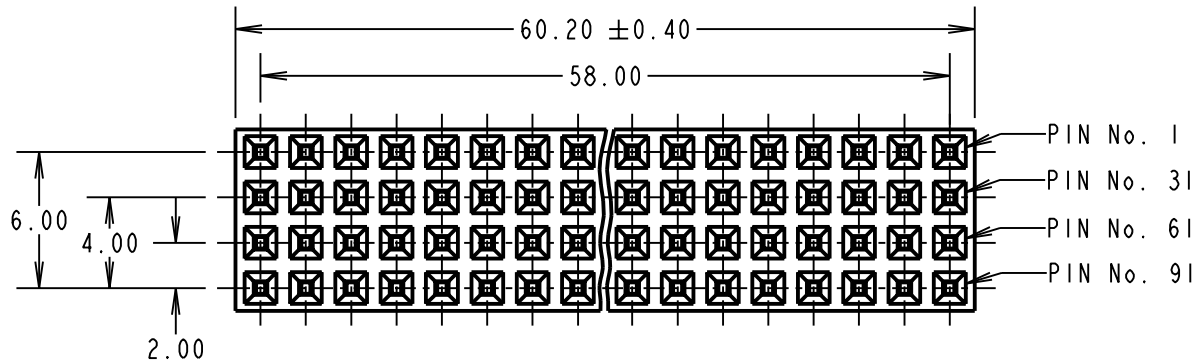

NOTES.

1. ALL TOLERANCES ARE ± 0.20 UNLESS OTHERWISE STATED.

RECOMMENDED
PCB LAYOUT

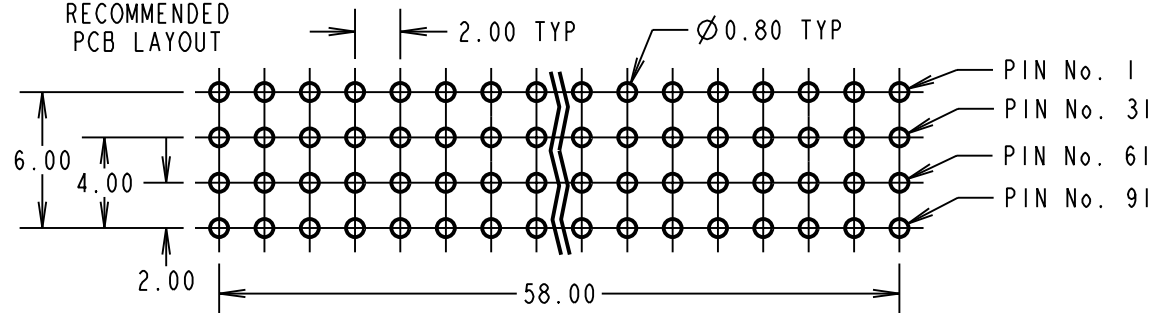

SPECIFICATION:

MATERIALS:

MOULDING = NYLON 6T UL94V-0, BLACK

CONTACTS = PHOSPHOR BRONZE

FINISH (OVER NICKEL):

GOLD ON CONTACT AREA, 100% TIN ON TAILS

ELECTRICAL:

CURRENT RATING = 1A MAX

CONTACT RESISTANCE = 30 MILLIOHMS MAX

INSULATION RESISTANCE = 5,000 MEGOHMS MIN

VOLTAGE PROOF = 800V AC FOR 1 MINUTE

MECHANICAL:

INSERTION FORCE = 2N/PIN MAX

WITHDRAWAL FORCE = 0.3N/PIN MIN

ENVIRONMENTAL:

TEMPERATURE RANGE = -55°C TO +105°C

PACKING:

TUBE

ORDER CODE:

M22-6033042

No. OF WAYS PER ROW
30

FINISH: _____
42 = SELECTIVE GOLD + 100% TIN

CP	6	16.12.09	10582
NAME	ISS.	DATE	C/NOTE
APPROVED: C.PENROSE			
CHECKED: R.ADDE			
DRAWN: D.BECK			
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN

HARWIN USA TEL: 603 893 5376 FAX: 603 893 5396 mis@harwin.com	HARWIN Europe (UK) TEL: 023 9231 4545 FAX: 023 9231 4590 mis@harwin.co.uk	HARWIN Asia TEL: +65 6 779 4909 FAX: +65 6 779 3868 mis@harwin.com.sg
--	--	--

THIS DRAWING AND ANY
INFORMATION OR DESCRIPTIVE
MATTER SET OUT HEREON ARE
CONFIDENTIAL AND COPYRIGHT
PROPERTY OF THE HARWIN
GROUP AND MUST NOT BE
DISCLOSED, LOANED, COPIED
OR USED FOR MANUFACTURING,
TENDERING OR FOR ANY
OTHER PURPOSE WITHOUT
THEIR WRITTEN PERMISSION.

TOLERANCES

X. = ± 1 mm
X.X = ± 0.25 mm
X.XX = ± 0.10 mm
X.XXX = ± 0.01 mm

ANGLES = $\pm 5^\circ$

UNLESS STATED

MATERIAL:

SEE ABOVE

FINISH: SEE ABOVE

S/AREA: mm²

TITLE:

PCI04 PLUS POST HEADER
RECEPTACLE

DRAWING NUMBER:

M22-60330XX

SHT
2 OF 2