


J O B B E R D R I L L S

Straight Shank
Standard Helix

BS 328 DIN 338 ISO 235/1

	Range	Finish
01 000 HSS	3/64"-3/4" 1.00mm-25.00mm	P1 Blue P1 Blue
01 030 HSS	1/64"-3/4" 0.30mm-25.00mm	Bright Bright
01 005 HSS	3/64"-3/4" 1.00mm-20.00mm	TiN TiN

Point Angle 118° General Purpose

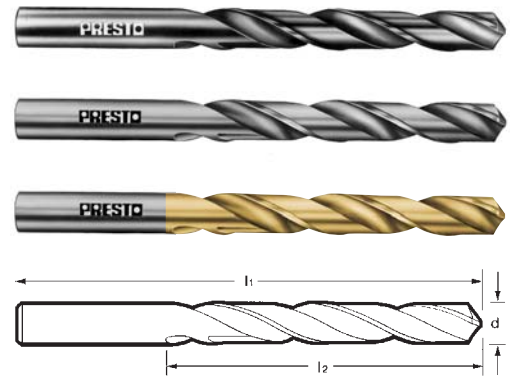

Dia	Flute Length	Overall Length	01000	01005
in	mm	mm	01030	Availability
d	l ₂	l ₁		

Dia	Flute Length	Overall Length	01000	01005
in	mm	mm	01030	Availability
d	l ₂	l ₁		

Dia	Flute Length	Overall Length	01000	01005
in	mm	mm	01030	Availability
d	l ₂	l ₁		

1/4	6.20	63	101	•	•
	6.25	63	101	•	•
	6.30	63	101	•	•
	6.35	63	101	•	•
	6.40	63	101	•	•
	6.45	63	101	•	•
	6.50	63	101	•	•
	6.55	63	101	•	•
	6.60	63	101	•	•
	6.65	63	101	•	•
17/64	6.70	63	101	•	•
	6.75	69	109	•	•
	6.80	69	109	•	•
	6.90	69	109	•	•
	6.95	69	109	•	•
	7.00	69	109	•	•
	7.05	69	109	•	•
	7.10	69	109	•	•
	7.15	69	109	•	•
	7.20	69	109	•	•
9/32	7.25	69	109	•	•
	7.30	69	109	•	•
	7.35	69	109	•	•
	7.40	69	109	•	•
	7.50	69	109	•	•
	7.55	75	117	•	•
	7.60	75	117	•	•
	7.65	75	117	•	•
	7.70	75	117	•	•
	7.75	75	117	•	•
19/64	7.80	75	117	•	•
	7.85	75	117	•	•
	7.90	75	117	•	•
	7.95	75	117	•	•
	8.00	75	117	•	•
	8.05	75	117	•	•
	8.10	75	117	•	•
	8.15	75	117	•	•
	8.20	75	117	•	•
	8.25	75	117	•	•
5/16	8.30	75	117	•	•
	8.35	75	117	•	•

11/32	8.40	75	117	•	•
	8.50	75	117	•	•
	8.55	75	117	•	•
	8.60	81	125	•	•
	8.65	81	125	•	•
	8.70	81	125	•	•
	8.75	81	125	•	•
	8.80	81	125	•	•
	8.85	81	125	•	•
	8.90	81	125	•	•
23/64	9.00	81	125	•	•
	9.05	81	125	•	•
	9.10	81	125	•	•
	9.15	81	125	•	•
	9.20	81	125	•	•
	9.25	81	125	•	•
	9.30	81	125	•	•
	9.35	81	125	•	•
	9.40	81	125	•	•
	9.45	81	125	•	•
3/8	9.50	81	125	•	•
	9.55	87	133	•	•
	9.60	87	133	•	•
	9.65	87	133	•	•
	9.70	87	133	•	•
	9.75	87	133	•	•
	9.80	87	133	•	•
	9.85	87	133	•	•
	9.90	87	133	•	•
	9.95	87	133	•	•
25/64	10.00	87	133	•	•
	10.05	87	133	•	•
	10.10	87	133	•	•
	10.15	87	133	•	•
	10.20	87	133	•	•
	10.25	87	133	•	•
	10.30	87	133	•	•
	10.35	87	133	•	•
	10.40	87	133	•	•
	10.45	87	133	•	•
13/32	10.50	87	133	•	•
	10.55	87	133	•	•
	10.60	87	133	•	•

27/64	10.65	87	133	•	•
	10.70	94	142	•	•
	10.75	94	142	•	•
	10.80	94	142	•	•
	10.85	94	142	•	•
	10.90	94	142	•	•
	10.95	94	142	•	•
	11.00	94	142	•	•
	11.05	94	142	•	•
	11.10	94	142	•	•
7/16	11.15	94	142	•	•
	11.20	94	142	•	•
	11.25	94	142	•	•
	11.30	94	142	•	•
	11.35	94	142	•	•
	11.40	94	142	•	•
	11.45	94	142	•	•
	11.50	94	142	•	•
	11.55	94	142	•	•
	11.60	94	142	•	•
29/64	11.65	94	142	•	•
	11.70	94	142	•	•
	11.75	94	142	•	•
	11.80	94	142	•	•
	11.85	101	151	•	•
	11.90	101	151	•	•
	11.95	101	151	•	•
	12.00	101	151	•	•
	12.10	101	151	•	•
	12.20	101	151	•	•
15/32	12.25	101	151	•	•
	12.30	101	151	•	•
	12.40	101	151	•	•
	12.50	101	151	•	•
	12.60	101	151	•	•
	12.70	101	151	•	•
	12.75	101	151	•	•
	12.80	101	151	•	•
	12.90	101	151	•	•
	13.00	101	151	•	•
31/64	13.10	101	151	•	•

Twist Drills

Reamers

Taps & Dies

Milling Cutters BS

Milling Cutters DIN

Pipe Threading Tools

Technical