

# SKINTOP® MSR-M, MSR-M-XL

Versatile brass cable gland

New  
UL-tested acc.  
UL 514B and  
UL 50 Type 6



## SKINTOP® MSR-M

Brass cable gland with metric thread according to EN 50262, provided with a reduction seal insert to seal cables and wires with smaller outside diameters.

### Note

Suitable accessories see SKINTOP® cable gland accessories metric page 9.24 SKINDICHT® cable gland accessories metric page 9.52.




## SKINTOP® MSR-M-XL

Brass cable gland with **long metric thread** according to EN 50262, provided with a reduction seal insert to seal cables and wires with smaller outside diameters.

### Note

Suitable accessories see SKINTOP® cable gland accessories metric page 9.24 SKINDICHT® cable gland accessories metric page 9.52.

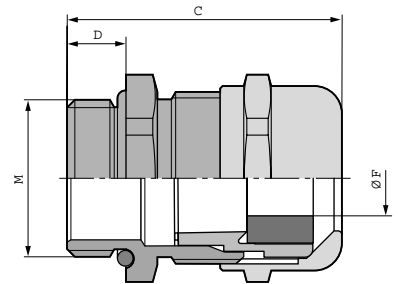

### Technical Data

Material:

Temperature range:

Protection class:

SKINTOP® MSR-M	Body: Nickel-plated brass Insert: polyamide Sealing ring: CR/NBR O-ring: NBR	-30 °C to +100 °C	IP 68 - 5 bar
SKINTOP® MSR-M-XL	Body: Nickel-plated brass Insert: Polyamide Sealing ring: CR/NBR O-Ring: Perbunan	-30°C up to +100°C	IP 68 - 5 bar

Part number	Thread size M	Clamping range mm	Wrench Size mm	C mm	D mm	PU pieces
-------------	---------------	-------------------	----------------	------	------	-----------

SKINTOP® MSR-M						
5311 2100	12 x 1,5	1 - 5	16	27,3	6,5	100
5311 2110	16 x 1,5	2 - 7	20	32	7	100
5311 2120	20 x 1,5	5 - 10	24	35,5	8	50
5311 2130	25 x 1,5	6 - 13	29	37,5	8	25
5311 2140	32 x 1,5	7 - 15	36	42,2	9	25
5311 2150	40 x 1,5	15 - 23	45	49,5	9	10
5311 2160	50 x 1,5	22 - 29	54	52	10	5
5311 2170	63 x 1,5	28 - 39	67	61,3	15	5
SKINTOP® MSR-M-XL						
5311 2105	12 x 1,5	1 - 5	16	32,8	12	100
5311 2115	16 x 1,5	2 - 7	20	37,0	12	50
5311 2125	20 x 1,5	5 - 10	24	39,5	12	50
5311 2135	25 x 1,5	6 - 13	29	41,5	12	25
5311 2145	32 x 1,5	7 - 15	36	48,2	15	25
5311 2155	40 x 1,5	15 - 23	45	53,5	15	10
5311 2165	50 x 1,5	22 - 29	54	57,0	15	5