

Customer Information Sheet

DRAWING No.: M22-6003005

SHEET 2 OF 2





IF IN DOUBT - ASK

(C)

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

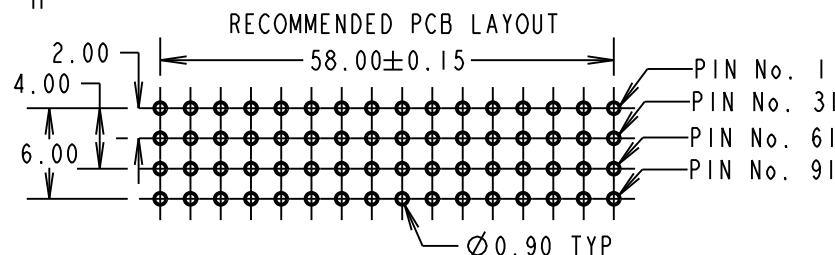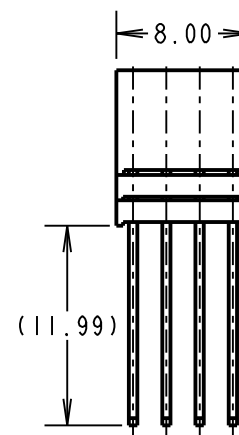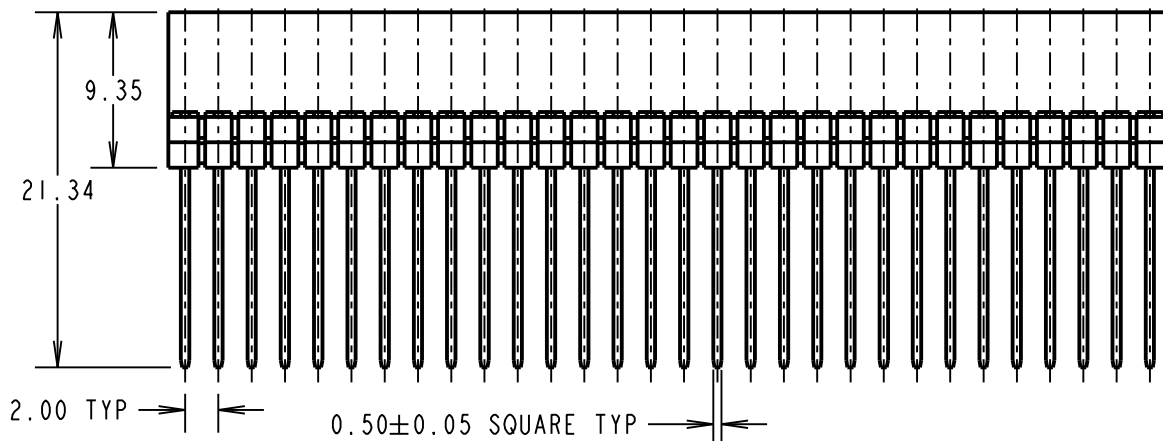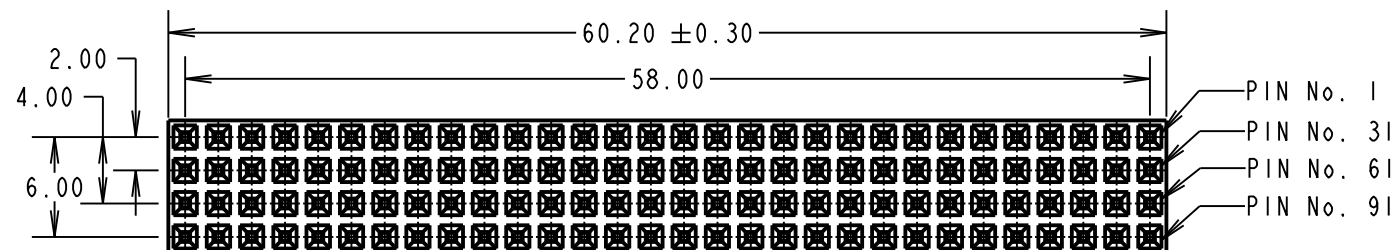

NOTES.
1. ALL TOLERANCES ARE ±0.20 UNLESS OTHERWISE STATED.

SPECIFICATIONS:

MATERIALS:

MOULDING = NYLON 6T UL94V-0, BLACK
CONTACTS = PHOSPHOR BRONZE

FINISH:

CONTACTS = GOLD FLASH OVER NICKEL

ELECTRICAL:

CONTACT RESISTANCE = 30 MILLIOHMS MAX.
INSULATION = 5000 MEGOHMS MIN.
CURRENT RATING = 1A MAX
VOLTAGE PROOF = 800V AC FOR 1 MINUTE

MECHANICAL:

INSERTION FORCE = 2N/PIN MAX
WITHDRAWAL FORCE = 0.3N/PIN MIN

ENVIRONMENTAL:

TEMPERATURE RANGE = -55°C TO +105°C.

PACKING:

TUBE

SB	6	16.02.12	11653
NAME	ISS.	DATE	C/NOTE
APPROVED: S.BENNETT			
CHECKED: M.G.PLESTED			
DRAWN: D.BECK			
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN

www.harwin.com
technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES

X. = ±1mm
X.X = ±0.25mm
X.XX = ±0.10mm
X.XXX = ±0.01mm

ANGLES = ±5°

UNLESS STATED

MATERIAL:

SEE ABOVE

FINISH:

S/AREA:

mm²

TITLE:

PCI04 PLUS CONNECTOR
(STACKTHROUGH)

DRAWING NUMBER:

M22-6003005

SHT
2 OF 2