




PLASTIC FACE PLATE DOUBLE BNC

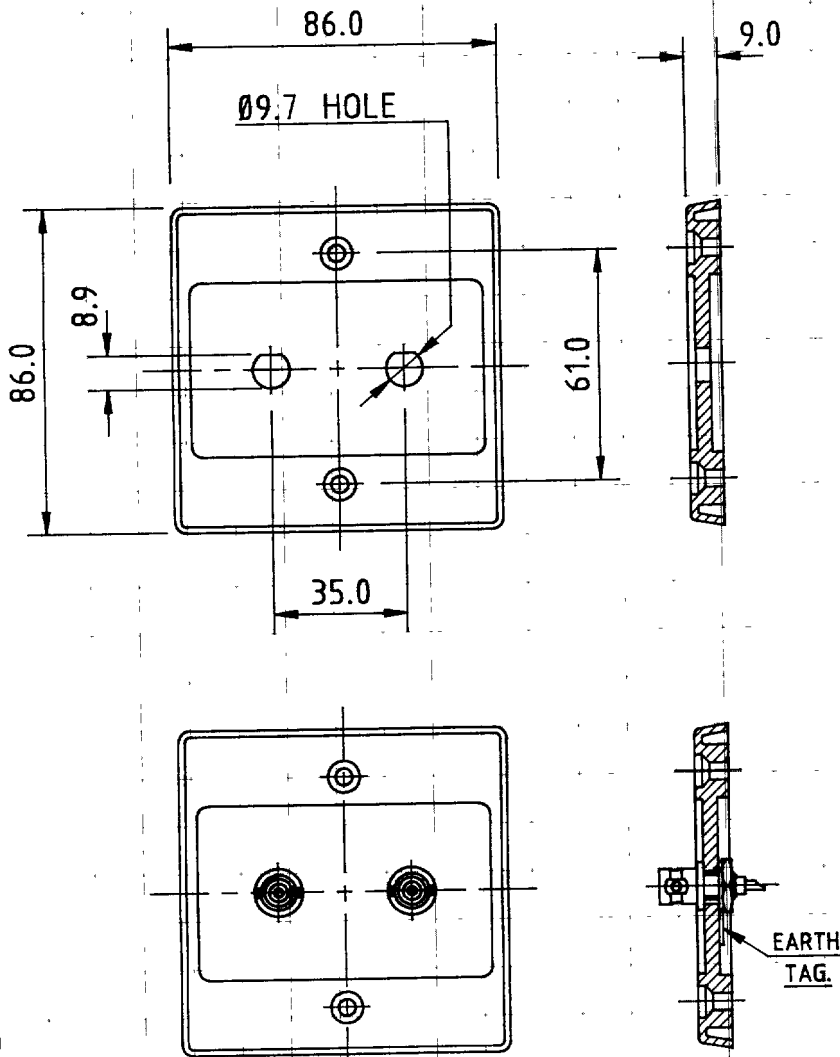

TECHNICAL DATA:

FACE PLATE

MANUFACTURED FROM WHITE POLYAMIDE TO UL94V-0 TO FIT STANDARD 86 x 86 BS. MOUNTING BOXES.

BNC SERIES

TYPE: BAYONET LOCKING CONNECTOR TO SUIT COMMON R.F. CABLES
BODY MATERIAL: BRIGHT NICKEL PLATED BRASS
CONTACT : SILVER PLATED BERYLLIUM COPPER
INSULATOR: P.T.F.E.
NOMINAL IMPEDANCE: 75 OHMS OR 50 OHMS
WORKING VOLTAGE: 500V PEAK
PROOF VOLTAGE: 2000V PEAK
FREQUENCY: TO 4000 MHz

EARTH TAG

MATERIAL: SILVER PLATED BRASS

NOTE!

BNC CONNECTOR ILLUSTRATED IS THE BNC BULKHEAD SOCKET (SOLDER CUP) FROM STANDARD RANGE. OTHER STYLES AND CONTACT FINISHES ETC. AVAILABLE UPON REQUEST.

STANDARD FACE PLATES AVAILABLE:

- NX4003/6: FACE PLATE AND 2 SCREWS M3.5x30
 - NX4003/5: PRELOADED WITH 2 x 75 OHM BNC BULKHEAD SOCKET (SOLDER CUP)
 - NX4120/5: PRELOADED WITH 2 x 50 OHM BNC BULKHEAD SOCKET (SOLDER CUP)
- PRELOADED ASSEMBLIES INCLUDE 2 SCREWS M3.5x30

2BNCB5K

The Mycalex Company Ltd.

Wilkinson Road, Love Lane, Cirencester, Gloucestershire, England GL7 1YT
 Telephone 0285 651811/651555
 Fax: 0285 850379
 A member of the Mycalex Group of Companies



Q5076

