
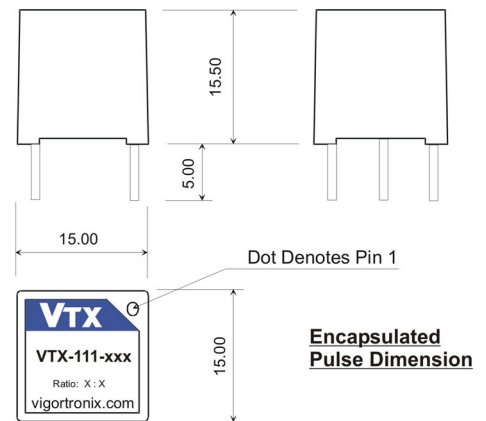
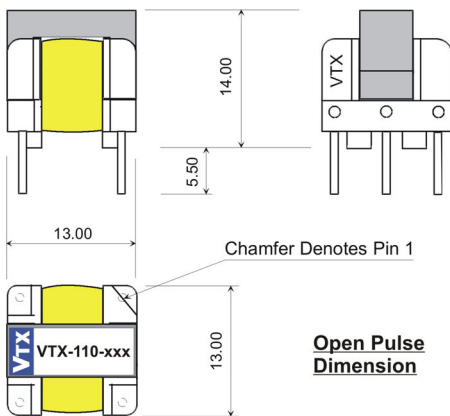

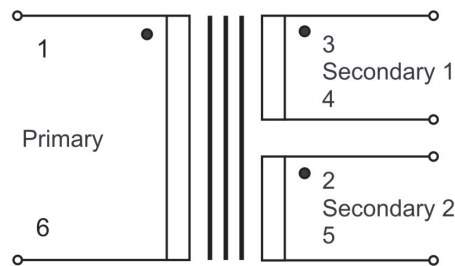


Features:

- Open or Encapsulated PCB mounting
- Designed for Wide band and General Pulse applications.
- Ideal for Triac and Thyristor Control Systems
- Max Pulse Current 200mA (Peak)
- RoHS Compliant

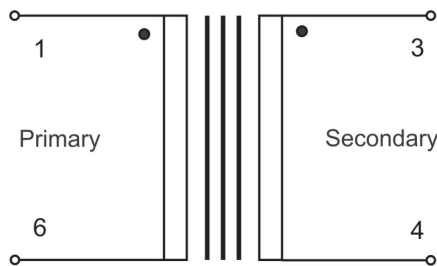

Part No	Ratio	Ind. Pri (mH) Min	Ind. Sec (mH) Min	Pri DCR Ω +/-10%	Sec DCR Ω +/-10%	Int-Wind Cap	Leakage Ind.	Isolation Voltage	Bandwidth	Volt-Time Prod.	Max Pulse Current
VTX-110-004	1:1	3	3	1.10	1.32	20pF	19uH	2.8KVac	3kHz ~ 1MHz	200V uS	200mA
VTX-111-004	1:1	3	3	1.10	1.32						
VTX-110-006	1:1+1	3	3 + 3	1.32	1.1+1.54	30pF	8uH				
VTX-111-006	1:1+1	3	3 + 3	1.32	1.1+1.54						
VTX-110-008	2:1+1	12	3 + 3	3.36	1.4 + 2.0	26pF	30uH				
VTX-111-008	2:1+1	12	3 + 3	3.36	1.4 + 2.0						
VTX-110-010	2:1	12	3	2.32	1.45	19pF	115uH				
VTX-111-010	2:1	12	3	2.32	1.45						
VTX-111-042	1:1	3	3	0.8	0.8	20pF	85uH	5KVac			
VTX-111-045	2:1	12	3	0.44	0.2						

Products can be altered to suite custom requirements. Please contact Vigortronix for your specific requirements.
 The information contained in this document is subject to change without notice.